

AHWAL-2/190
FLOOD LIGHT





AHWAL-2/190

AHWAL-2/190 Flood light has :

- Multiple attachments for glare control
- 15°/ 26°/ 36°/ 50°/ 60° beam options for all applications
- Luminaire housing of Die-Cast Aluminium
- IP65, High Ingress Protection against dust & Moisture
- Innovative proprietary designed bracket without any attachment
- Available from 5000 lumens to 10000 lumens
- Energy-efficient LED with high colour rendering
- Extremely robust construction, precise optics and beautiful form factor

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

90 lm/W

AC220V ON/OFF

SDCM <3

Lens with Tempered Glass/ Honeycomb


L70 @50,000h

Aluminium Die-Cast

Types

Surface

Single Line Diagram

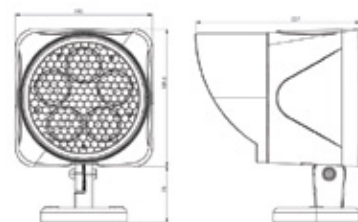

CRI ≥ 80

AHWAL-2/190



System Power	Dimensions
70W	L= 190mm, Width with visor= 227mm Height= 189.5mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>80

Beam Angle

15°
26°
36°
50°
60°

Control

Non Dimmable
Dali Dimmable

Mounting Type

Surface

Material Colour

RAL as per request