

AHWAL-2/190
SPIKE LIGHT

divinity lights



Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens with Tempered Glass/ Honeycomb


L70 @50,000h

Aluminium Die-Cast

Type

Spike mounted


Single Line Diagram

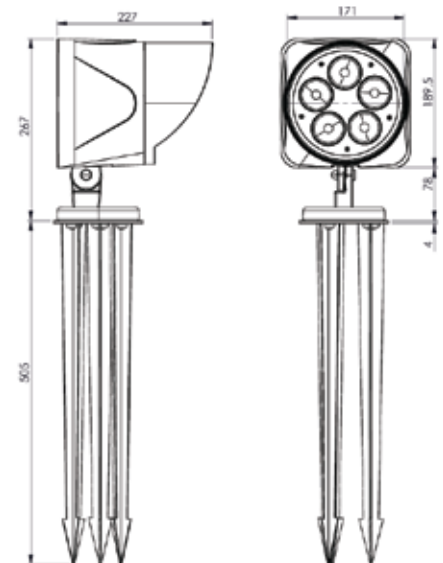

AHWAL-2/190 SPIKE LIGHT

The Ahwal-2/190 with spike light:

- Luminaire housing of Die-Cast Aluminium
- IP65, High Ingress Protection against dust & moisture
- 15°/ 26°/ 36°/ 50°/ 60° beam options for all applications
- The built quality ensures long and maintenance free service life
- High lumen light for landscape applications
- Powerful and precise optics
- Energy-efficient LED with high colour rendering
- Wide range of applications including trees up to 10 metres high



CRI ≥ 80

AHWAL SPIKE LIGHT



System Power	Dimensions
70W	L= 189.5mm, Width with visor= 227mm Height with Spike= 772mm

Order Options

CCT (Color Temperature)

- 2700K
- 3000K
- 4000K

CRI

- >80

Beam Angle

- 15°
- 26°
- 36°
- 50°
- 60°

Control

- Non-Dimmable
- Dali- Dimmable



Mounting Type

- Spike Mounted

Material Color

- RAL as per request