
ALFA- 1H
STREET LIGHT

divinity lights







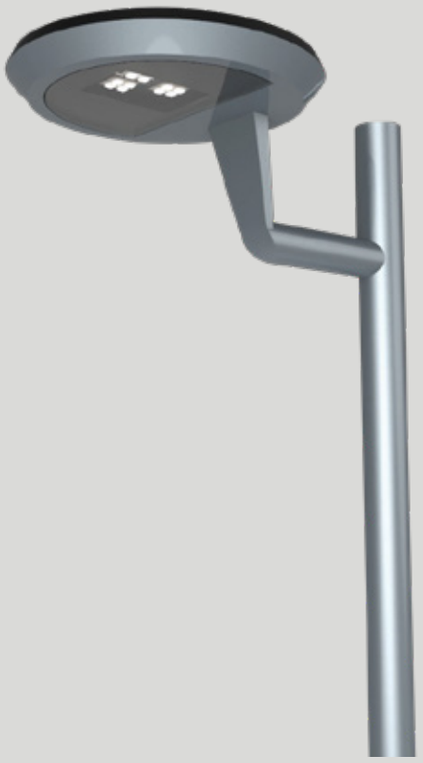





ALFA- 1H STREET LIGHT

ALFA- 1H street light fixture has :

- High grade Aluminium die-casting housing for heavy-duty outdoor
- lighting applications
- IP66 rated fixture protects from dust and harsh weather
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- High efficiency polycarbonate UV stabilised cover with integrated lens to ensure sym - metrical batwing light distribution
- Suitable for pole mounting
- Thermal efficient casting
- Integral heat sink design increases air flow velocity, providing maximum passive thermal management
- High quality toughened glass

divinity lights

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

LEDs with Tempered Glass


L70 @50,000h

Aluminium Die-Cast

Type


Pole Mounted

Single Line Diagram

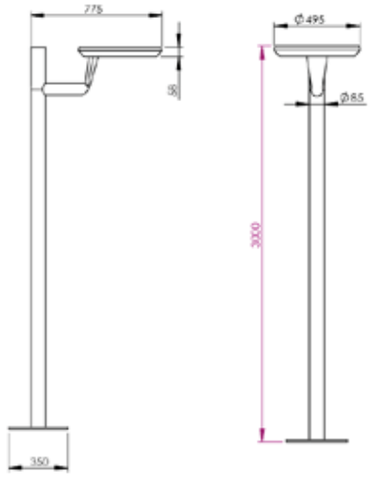

Direct





CRI ≥ 80

ALFA- 1H STREET LIGHT



System Power	Dimensions
50W	Dia= 495mm, H= 58mm Pole H= 3000mm Pole Dia- 85mm

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

CRI

>80

Beam Angle

Asymmetric

Control

Non-Dimmable

Dali- Dimmable



Mounting Type

Pole Mounted

Material Color

RAL as per request