


ALINA

divinity lights

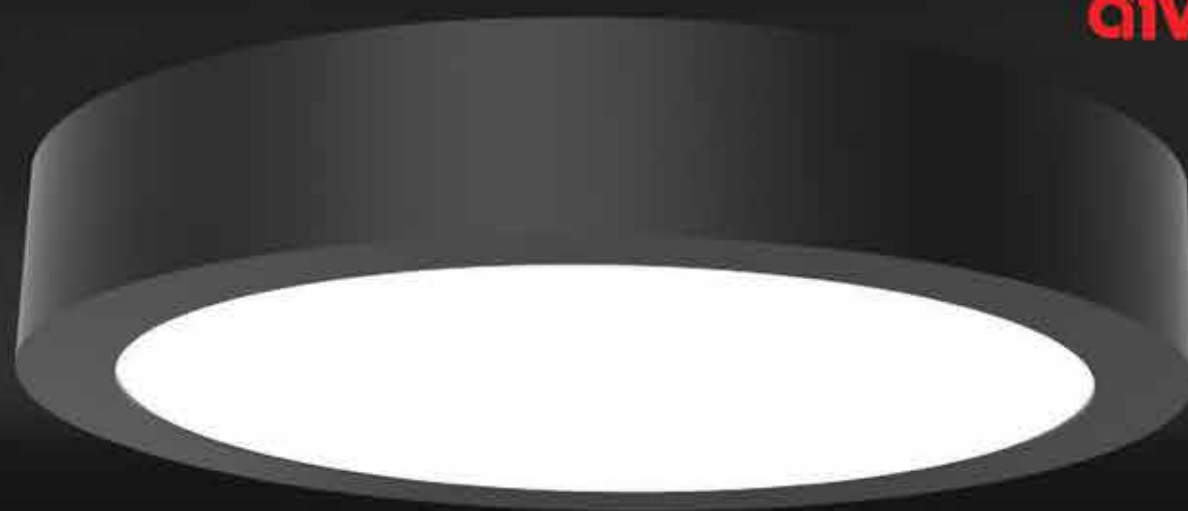

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

PMMA Diffuser

L70 @50,000h


Aluminium Die-cast

Types


Surface

Single Line Diagram


ALINA 140



ALINA 170



ALINA 220

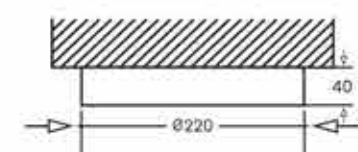


ALINA

Alina has :

- Circular surface diffused downlighter
- Luminaire housing of die cast- aluminium
- Premium powder coated finish
- High efficiency PMMA diffuser
- SMD (Surface Mount Device) technology
- LED with high colour rendering
- Surface mounted with compact circular design

Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

ALINA



ALINA 140

Product Order Code	System Power	Dimension
4051-                                                          	12W	Dia = 140mm H = 40mm

ALINA 170

Product Order Code	System Power	Dimension
4051-                                                          	18W	Dia = 170mm H = 40mm

ALINA 220

Product Order Code	System Power	Dimension
4051-                                                          	25W	Dia = 220mm H = 40mm

Order Options

Distribution

Direct

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4

CRI	
>90	1

Beam Angle

110°

Control	
NON-Dimmable	1
DALI-2 DT6	2
DALI-2 DT8	3
DALI +	4

Mounting Type

Surface

Material Colour	
Black	1
White	2
Grey	3

Accessories

Product Order Code	Accessories Name	Accessories Image
4051-01 	LED	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1