

AMIGO

Direct | Recessed



AMIGO is recessed circular diffused downlighter made up of die cast aluminium housing and with premium powder coated finish.

Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and $\text{CRI} \geq 90$. The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency PMMA diffuser gives uniform and zero multiple shadow illumination

AMIGO



Amigo downlighter available in 15W with Outer dia 154mm, Cutout dia 130mm, Ht 56mm

Amigo downlighter is crafted for direct light distribution making it ideal for residential, commercial & professional applications.

Single Line Diagram

Recessed

AMIGO

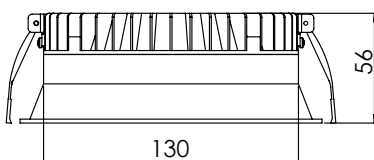

AMIGO



Quick Info

Mounting Type

Recessed

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

110°

Optics

PMMA/Opal Diffuser

Efficacy

3000K- 82.0

4000K- 92.5

5700K- 106.3

Tunable White 2700K-6500K- 92.5

Electrical

Wattage - 15W

Input Voltage- 220-240 VAC

Physical

Outer Dia- 154mm

Cutout Dia- 130mm

Height- 56mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com