

AMIGO

divinity lights



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

PMMA Diffuser


L70 @50,000h

Aluminium Die-cast

Types

Recessed

Single Line Diagram

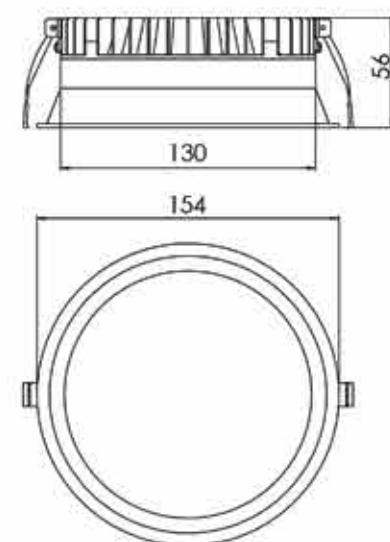

AMIGO

Amigo Duo has:


- Luminaire housing of die cast- aluminium
- Premium powder coated finish
- Deep recessed high efficiency PMMA diffuser
- SMD (Surface Mount Device) technology
- LED with high colour rendering
- Interpretation of the real environment light and colours
- Zero multiple shadows

Colours



Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

AMIGO



AMIGO 12

Product Order Code	System Power	Dimension
4022-  1	12W	Outer Dia = 154mm Cutout Dia = 130mm H = 56mm

AMIGO 15

Product Order Code	System Power	Dimension
4022-  2	15W	Outer Dia = 154mm Cutout Dia = 130mm H = 56mm

Order Options

Distribution

Direct

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4

CRI	
>90	1

Beam Angle

110°

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Mounting Type

Recessed

Accessories

Product Order Code	Accessories Name	Accessories Image
4022-01 	LED	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1