

BAY-K68
BATTEN LIGHT

divinity lights



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

PC Diffuser



L70 @50,000h

Aluminium Die Cast

Types

Surface

Single Line Diagram

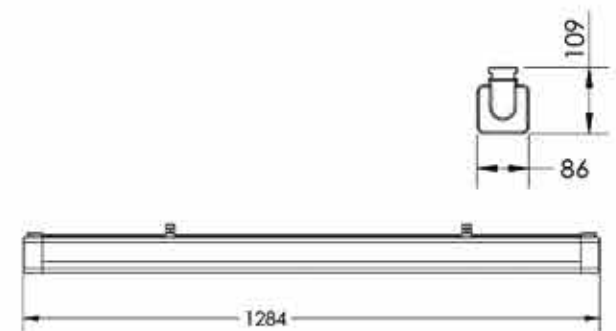


BAY-K86 BATTEN LIGHT

BAY-K86 BATTEN LIGHT

- Perfect replacement for high voltage CFL and HID lamps
- Wide operating voltage
- Suitable for commercial & industrial uses
- Made in an extruded aluminium housing
- Lower power consumption than fluorescent lamps
- No UV radiation
- Wide beam angle of 110°
- Illuminates wider areas
- Used in workshops, factories, shopping malls, hospitals, and assembly lines

Light Distribution



CRI ≥ 90



TUNABLE
WHITE

BAY-K86



BAY-K86

| Product Order Code | System Power | Dimensions |
|--------------------|--------------|-----------------------------|
| 9005-1 | 40W | L=1284mm, W=86mm,H=109mm |

Order Options

CCT (Colour Temperature)

| | |
|---------------------------|---|
| 3000K | 1 |
| 4000K | 2 |
| 5700K | 3 |
| Tunable White 2700K-6500K | 4 |

CRI

| | |
|-----|---|
| >90 | 1 |
|-----|---|

Beam Angle

110°

Control

| | |
|-----------------------|---|
| ON-OFF | 1 |
| ON-OFF (FLICKER FREE) | 2 |
| DALI-2 DT6 | 3 |
| DALI-2 DT8 | 4 |
| DALI + | 5 |




Mounting Type

Surface

Accessories

| Product Order Code | Accessories Name | Accessories Image |
|---|------------------|--|
| 9005-01  | Led |  |

Order Options

| CCT (Colour Temperature) | |  |
|---------------------------|---|---|
| 3000K | | 1 |
| 4000K | | 2 |
| 5700K | | 3 |
| Tunable White 2700K-6500K |  | 4 |
| CRI | |  |
| >90 | | 1 |