

LED Linear Highbay Light

divinitylights

K2

IP rating IP65

Milky Lens and Transparent Lens

Multiple Mounting Options



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Lens

L70 @50,000h


Aluminium Die Cast

Types


Pendant/ Surface

Single Line Diagram


100W/150W







200/250W



300/360W



400/500W

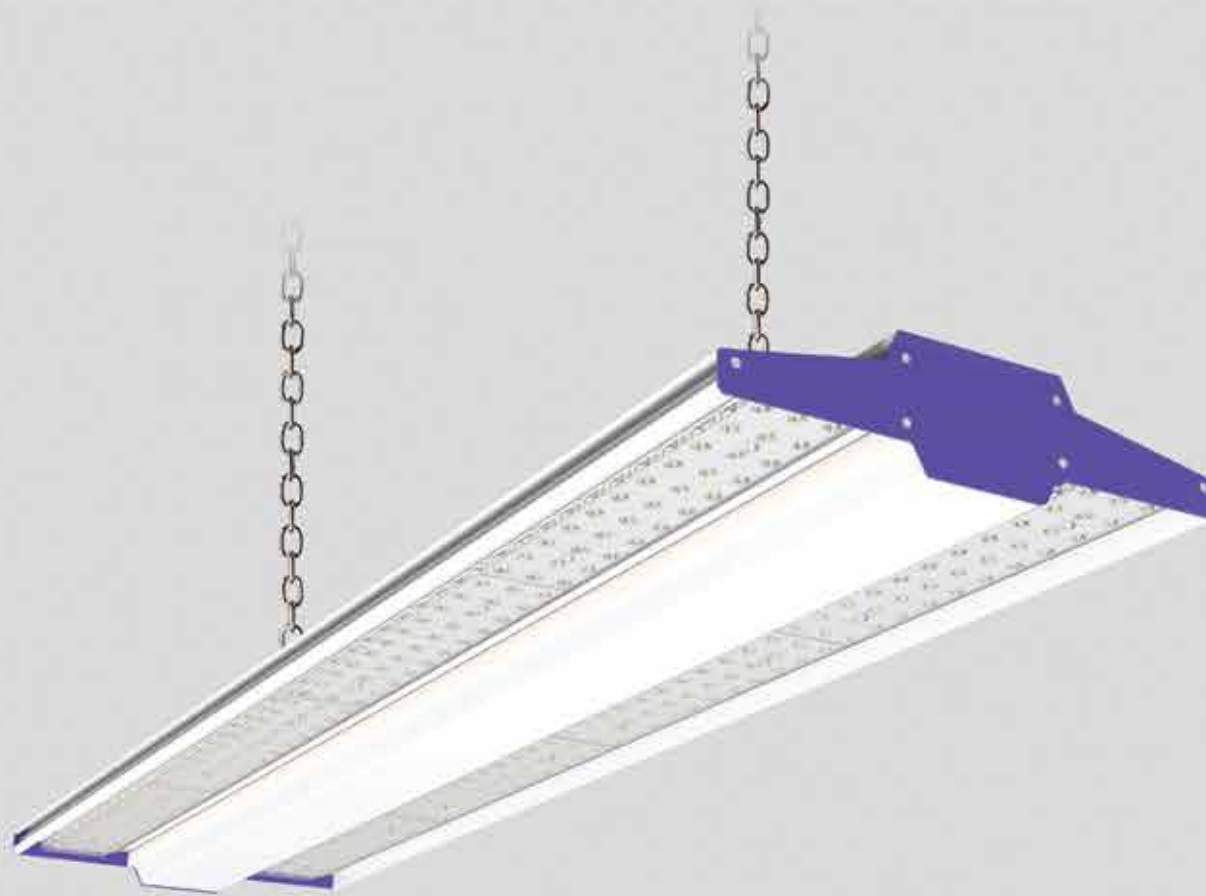


BAY-HB-K2 LINEAR HIGHBAY LIGHT

BAY-HB-K2 Linear Highbay Light is :

- Perfect replacement for high voltage CFL and HID lamps
- Wide operating voltage
- Suitable for commercial & industrial uses
- Made in an extruded aluminium housing
- Lower power consumption than fluorescent lamps
- No UV radiation
- Wide beam angle of 110°
- Illuminates wider areas
- Used in workshops, factories, shopping malls, hospitals and assembly lines

Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

BAY-HB-K2 LINEAR HIGH BAY LIGHT



BAY-HB-K2 LINEAR HIGHBAY LIGHT

Product Order Code	System Power	Dimensions
9002-1	100W	L=300mm, W=320mm,H=80mm
9002-2	150W	L=300mm, W=320mm,H=80mm
9002-3	200W	L=600mm, W=320mm,H=80mm
9002-4	250W	L=600mm, W=320mm,H=80mm
9002-5	300W	L=885mm, W=320mm,H=80mm
9002-6	350W	L=885mm, W=320mm,H=80mm
9002-7	400W	L=1190mm, W=320mm,H=80mm
9002-8	500W	L=1190mm, W=320mm,H=80mm

Order Options

CCT (Colour Temperature)		
3000K	1	
4000K	2	
5700K	3	
Tunable White 2700K-6500K	4	
CRI		
>90	1	
Beam Angle		
60°	1	
90°	2	
110°	3	
Control		
ON-OFF	1	
ON-OFF (FLICKER FREE)	2	
DALI-2 DT6	3	
DALI-2 DT8	4	
DALI +	5	
Mounting Type		
Pendant	1	
Surface	2	

Accessories

Product Order Code	Accessories Name	Accessories Image
9002-01 	Led	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1