CELINE
TRICK LIGHTS

Direct | Surface



CELINE TRICK LIGHT luminaire features a sleek, modern design crafted from aluminium die-cast housing with a premium powder-coated finish.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 80, this fixture ensures excellent color rendering and long-lasting performance. It maintains at least 70% of its luminous flux after 50,000 operating hours, guaranteeing durability and reliability over time. The high-efficiency **Lens** delivers a soft, uniform 180°X8° beam ideal for outdoor Trick Light applications, providing cozy, glare-free downward illumination. With IP66-rated waterproof construction and high power LED neon light with top bend feature is perfect for entrances, terraces, and architectural facades.

With a standard size of 336mm Length, 83mm Height, and 70mm Width, this fixture is crafted for direct light distribution, making it ideal for professional application.

Customisations in RAL finish, wattages, and Length available as per request to enhance installation and functionality.

Single Line Diagram

Surface Mounted

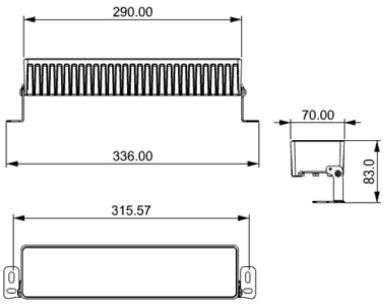

CELINE TRICK LIGHTS

INPUT VOLTAGE 24V DC | IP66 | CRI >80

Quick Info

Mounting Type
Surface

Material Colour
Robust Polymer Materia

Protection mode
IP66

Driver Details
DC24V ON/OFF

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED
CCT- 3000K/ 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle
180°X8°

Optics
Lens

Efficacy
80lm/W

Electrical
Wattage - 18W

Input Voltage- 24V DC

Physical Dimensions
Length- 290mm

Height- 83mm

Width- 70mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com