


CLIO 15

Direct | Recessed

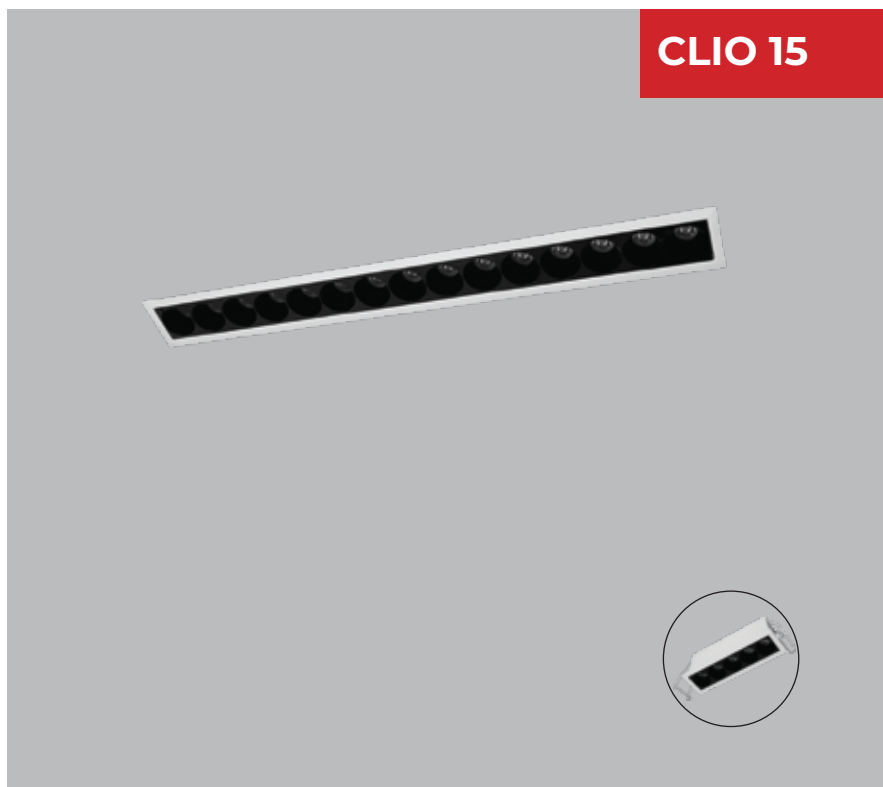

CLIO Downlighter is Fixed led Downlight made up of die cast aluminium housing and with premium powder coated finish.

Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency optics with beam angle options of 15°, 30° and 45° gives uniform and zero multiple shadow illumination.

CLIO 15


Clio 15 in 30W, 15 modules, linear shape these fixtures are crafted for direct light distribution making it ideal for residential & professional applications.

Options in reflector finish available as per request to enhance installation and functionality.

Single Line Diagram

Recessed

CLIO 15



CLIO 15



Quick Info

Mounting Type

Recessed

Material Colour

Customize RAL available

Protection mode

IP44

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

15°/24°/36°

Optics

Lens

Reflector

Efficacy

3000K- 90.1

4000K- 115.1

5700K- 129.3

Tunable White 2700K-6500K- 115.1

Electrical

Wattage - 30W

Input Voltage- 220-240 VAC

Physical

Outer Dia- LXW = 413x45mm

Cutout Dia- LXW = 405x37mm

Height- 49mm