


CLIO

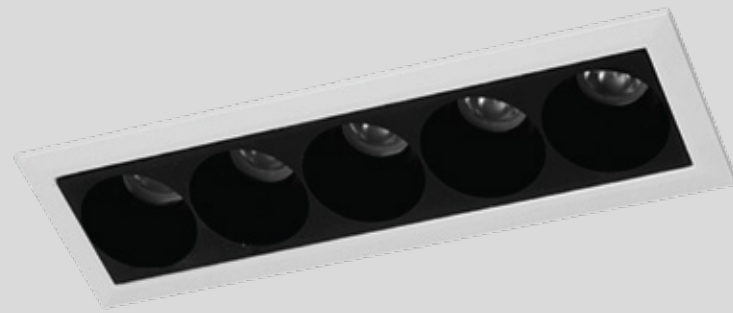

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Lens & Refelctor

L70 @50,000h

Aluminium Die-cast

Types

Recessed

Single Line Diagram

Recessed


CLIO 1



CLIO 2



CLIO 5



CLIO 10



CLIO 15




CLIO

Clio fixture has :

- Luminaire housing of die-cast- aluminium
- Recessed spotlight with effortless installation
- Premium powder coated finish
- SMD (Surface Mount Device) technology
- Technology for maximum efficiency
- Zero multiple shadows
- LED with effective colour rendering
- Overflowing colours with soft light and shadow
- Interpretation of the real environment light and colours
- High colour rendering

Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

CLIO



CLIO 1

System Power	Dimension
3W	Outer LXW- 45X45mm Cutout LXW- 37X37mm Height- 49mm

CLIO 2

System Power	Dimension
5W	Outer LXW- 75X45mm Cutout LXW- 68X37mm Height- 49mm

CLIO 5

System Power	Dimension
12W	Outer LXW- 147X45mm Cutout LXW- 140X37mm Height- 49mm

CLIO 10

System Power	Dimension
20W	Outer LXW- 280X45mm Cutout LXW- 273X37mm Height- 49mm

CLIO 15

System Power	Dimension
30W	Outer LXW- 414X45mm Cutout LXW- 405X37mm Height- 49mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

15°

30°

45°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Recessed

Material Colour

RAL As Per Request