



CURVE SOFT 28

divinity lights

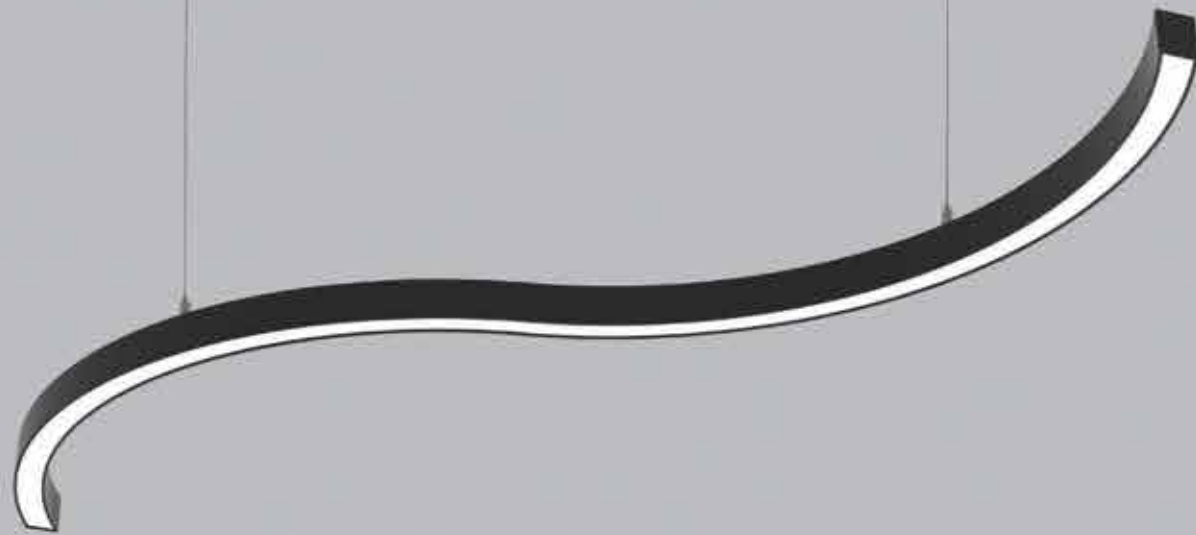

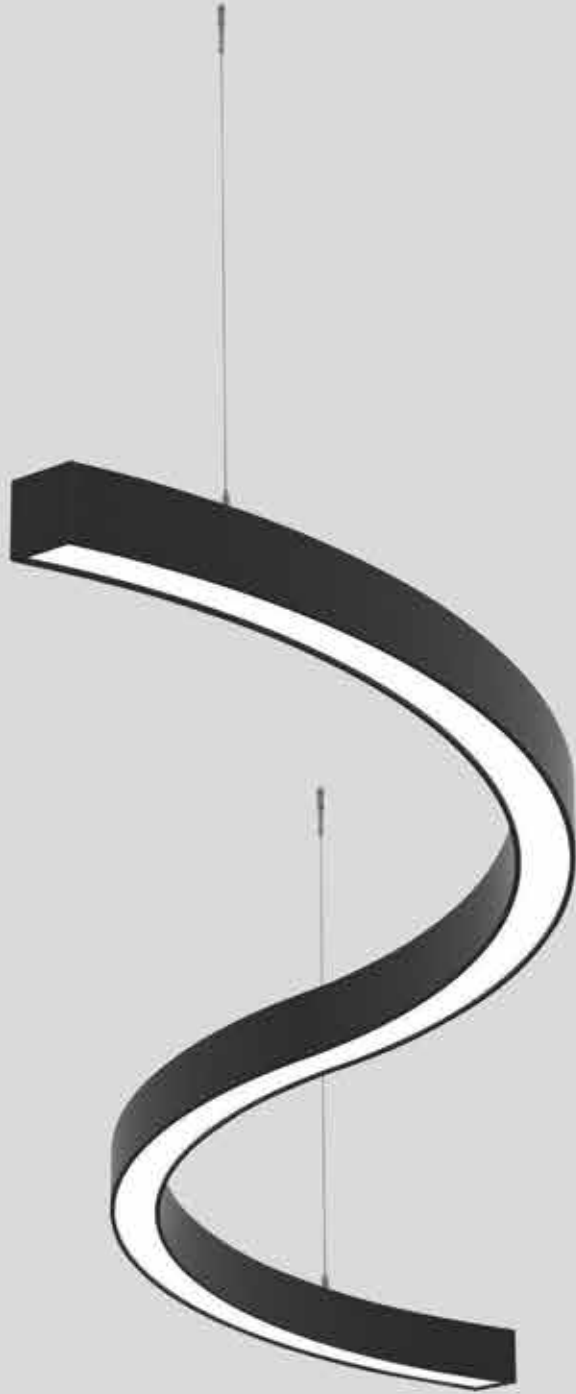

CURVE SOFT 28

Curve soft 28 has :

- LED curved linear
- Extruded Aluminium Luminaire Housing
- High efficiency Micro Prismatic/ PMMA Diffuser
- Uniform illumination
- Infinite architectural designs and circular patterns possible
- Energy efficient LED with high colour rendering
- LED PCB mounted
- For pendant or recessed mounted applications
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Micro Prismatic Diffuser/PMMA


L70 @50,000h

Aluminium


Types

Pendant/Recessed

Single Line Diagram

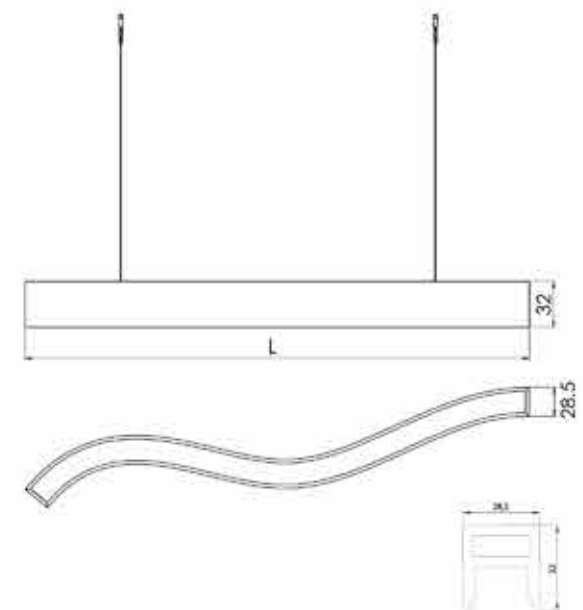

Colours



CRI ≥ 90



TUNABLE
WHITE

CURVE SOFT 28



CURVE SOFT 28

Product Order Code	System Power	Dimension
3020-                   	6W	L = 300mm,W = 28.5mm, H = 32mm
3020-                   	12W	L = 600mm,W = 28.5mm, H = 32mm
3020-                   	18W	L = 900mm,W = 28.5mm, H = 32mm
3020-                   	25W	L = 1200mm,W = 28.5mm, H = 32mm
3020-                   	50W	L = 2400mm,W = 28.5mm, H = 32mm

Order Options

Distribution

Direct

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4

CRI	
>90	1

Beam Angle

110°

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Mounting Type	
Pendant	1
Recessed	2

Material Colour	
Black	
White	
Grey	

Accessories

Product Order Code	Accessories Name	Accessories Image
3020-01 	LED PCB	
3020-02	Suspension Wire	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1