


CURVE SOFT

divinity lights



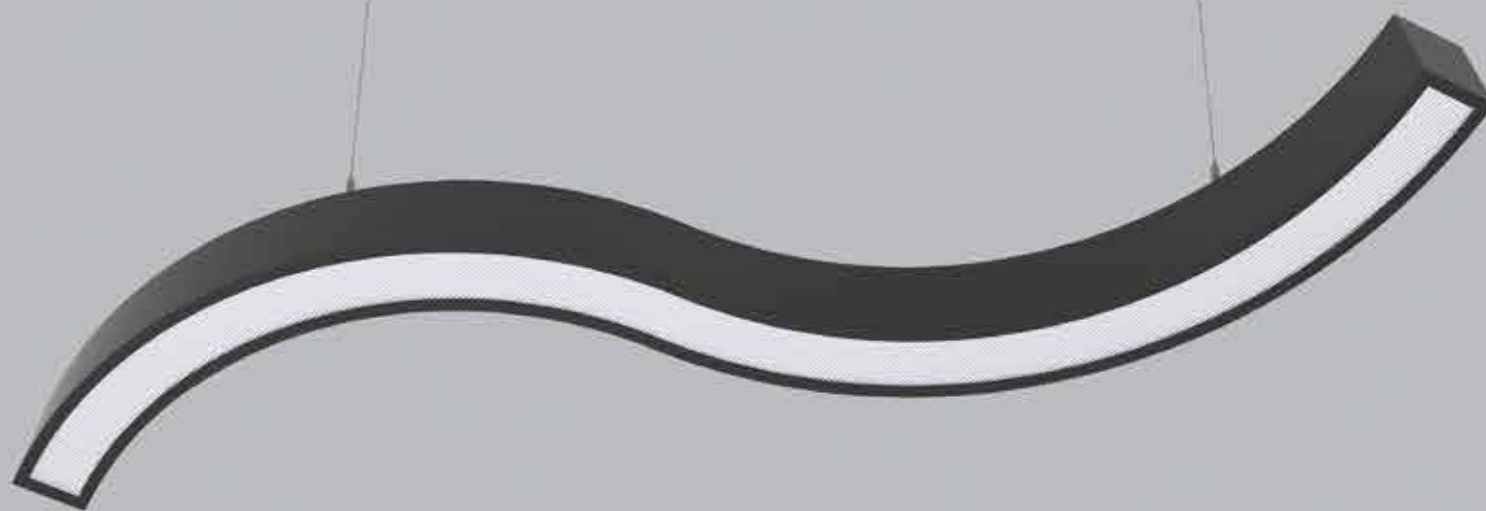

CURVE SOFT

Curve Soft has :

- LED curved linear
- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency Micro Prismatic/ PMMA Diffuser
- Uniform illumination
- Infinite architectural designs and circular patterns possible
- LED PCB mounted
- For pendant or recessed mounted applications
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Micro Prismatic Diffuser


L70 @50,000h

Aluminium


Types

Pendant/Recessed

Single Line Diagram

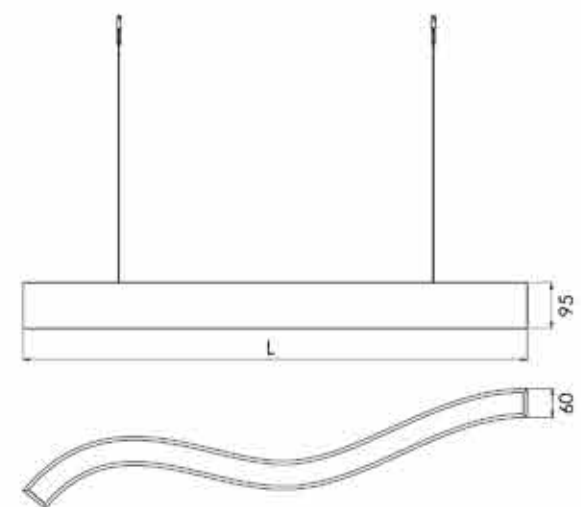

Colours



CRI ≥ 90



TUNABLE
WHITE

CURVE SOFT



CURVE SOFT

Product Order Code	System Power	Dimension
3019-  1	6W	L = 300mm, W = 60mm, H = 95mm
3019-  2	12W	L = 600mm, W = 60mm, H = 95mm
3019-  3	18W	L = 900mm, W = 60mm, H = 95mm
3019-  4	25W	L = 1200mm, W = 60mm, H = 95mm
3019-  5	50W	L = 2400mm, W = 60mm, H = 95mm

Order Options

Distribution

Direct

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4



CRI	
>90	1

Beam Angle

110°

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Mounting Type	
Pendant	1
Recessed	2

Material Colour	
Black	
White	
Grey	

Accessories

Product Order Code	Accessories Name	Accessories Image
3019-01 	LED PCB	
3019-02	Suspension Wire	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1