


## DRACO TI45

Direct | Recessed

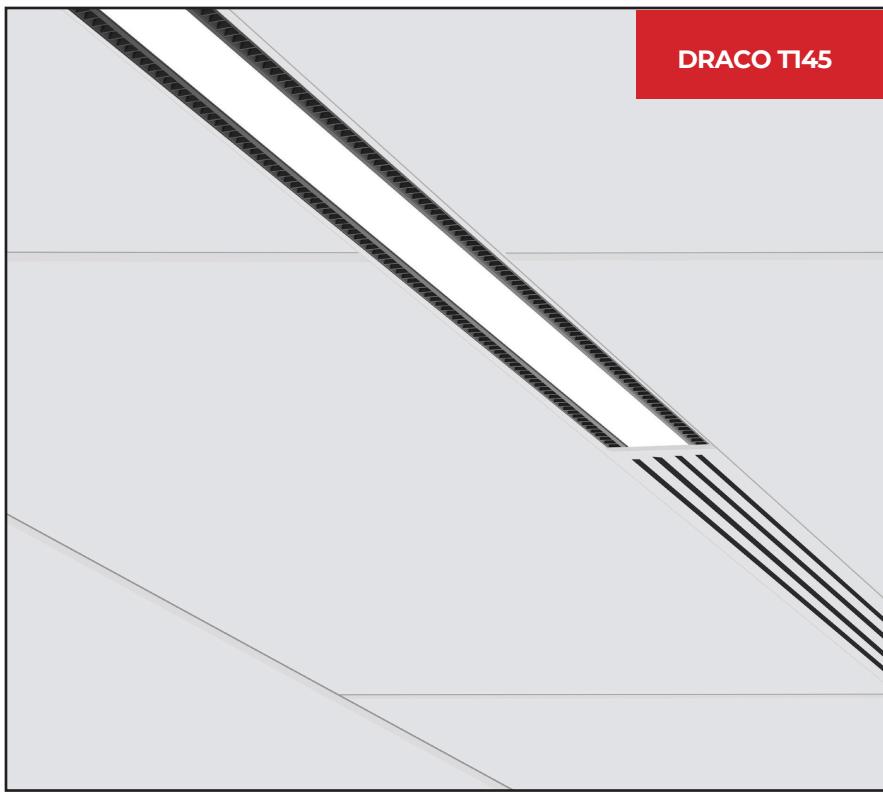

DRACO TI45

## DRACO TI45



### Quick Info

#### Mounting Type

Recessed

#### Material Colour

Customize RAL available

#### Protection mode

IP40

#### Driver Details

ON/OFF, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

#### LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6700K

CRI-  $\geq$  90

Life Span - L70@50000h

MacAdam -  $\leq$  3 SDCM

#### Beam Angle

110°

#### Optics

Micro Prismatic Diffuser

#### Efficacy

3000K- 98.5

4000K- 112.2

5700K- 125.5

Tunable White 2700K-6700K- 112.2

#### Electrical

Wattage - 30W/4ft

Opt Wattages Available -35W/4ft, 40W/4ft, 45W/4ft

Input Voltage- 220-240 VAC

#### Physical

Length- 1200mm

Height- 27mm

Width- 145mm

DRACO TI45 Luminaire with Extruded aluminium housing and with premium powder coating finish.

Powered by high quality LED's with a binning tolerance of  $\leq$  3 SDCM and CRI  $\geq$  90. The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency Micro Prismatic diffuser provides glare control and uniform illumination.


With a standard size of 1200 mm length, 27mm height and 145mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality.

### Single Line Diagram

Recessed with Frame in GYPSUM Ceiling

Recessed in T-Bar Techzone Ceiling

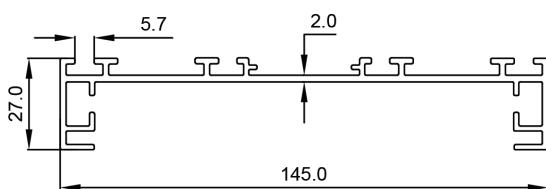

**divinity lights**

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

[www.divinitylights.com](http://www.divinitylights.com)