


DONUT UNDERWATER LIGHT

Direct | Recessed

DONUT UNDERWATER LIGHT



DONUT UNDERWATER LIGHT luminaire features a sleek, modern design crafted from precision-engineered Stainless Steel housing with a premium finish, offering exceptional durability and reliable performance for underwater lighting applications.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and $\text{CRI} \geq 80$, this fixture ensures consistent colour performance and long-lasting reliability. It maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring dependable illumination over time.

Equipped with high-quality tempered glass optics, the fixture provides excellent light distribution, enhanced durability, and reliable protection in underwater environments. With an IP68 protection rating, it is designed for demanding underwater applications.

With a standard size of 184mm Overall Diameter, 80mm Pipe Hole Diameter, and 35.5mm Height, this recessed fixture is ideal for swimming pools, fountains, water features, and architectural landscape installations.

Divinity Lights offers customised lighting solutions with options for RAL finishes, wattages, and specifications, tailored to specific project requirements for enhanced performance and installation flexibility.

Single Line Diagram

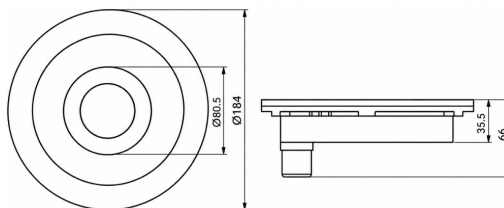

DONUT UNDERWATER LIGHT



Quick Info

Mounting Type

Recessed

Material Colour

Customize RAL available

Protection mode

IP68

Driver Details

Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K/3000K/4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

10°/ 26°/ 36°/ 50°/ 60°

Optics

Tempered Glass

Efficacy

40lm/W

Electrical

Wattage - 20W

Input Voltage- 220-240V AC

Physical

Overall Dia - 184mm

Pipe Hole Dia- 80mm

Height- 35.5mm