


DRIFTER

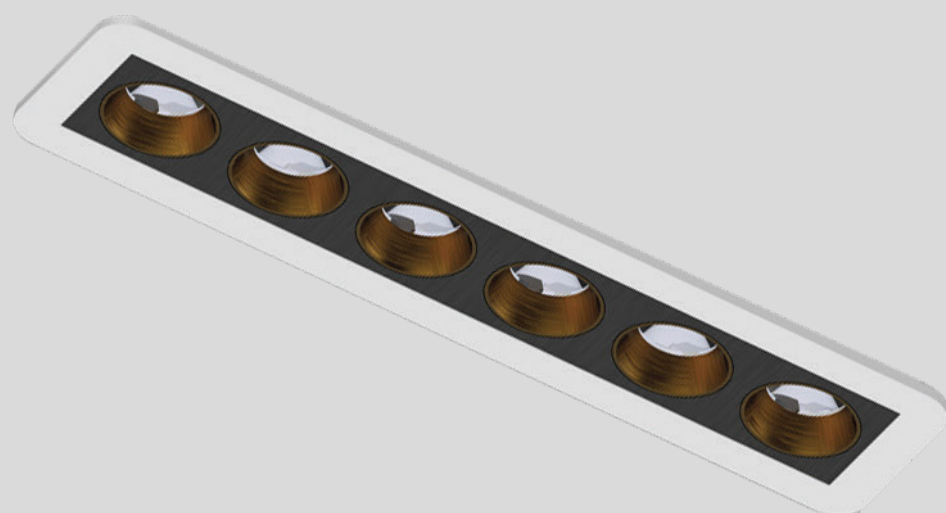

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Lens

L70 @50,000h


Aluminium Die-cast

Types

Recessed

Single Line Diagram


Profile

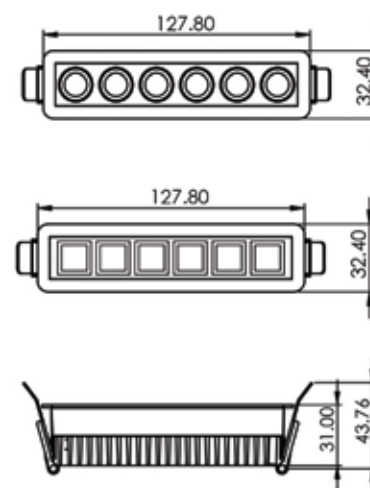

DRIFTER

DRIFTER fixture has:

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency Lens
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screw
- Unique curved design and patterns possible
- Bottom opening for easy maintenance



CRI ≥ 90



TUNABLE WHITE

DRIFTER



DRIFTER

System Power	Dimension
12W	Outer LXW- 128X32mm Height- 31mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

36°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Recessed

Material Colour

RAL As Per Request