


DUSTER TRIMLESS

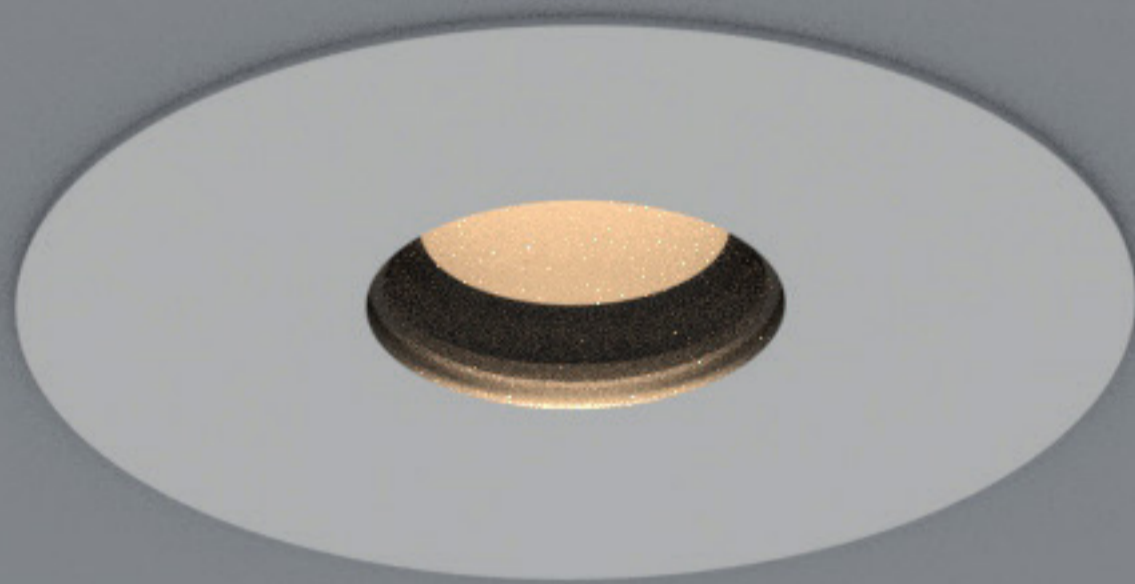

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6, DALI-2 DT8

SDCM<3

Lens


L70 @50,000h

Types


Recessed

Single Line Diagram

Duster Trimless-40



Duster Trimless-52




DUSTER TRIMLESS

Duster Trimless features has:

- Luminaire housing of die cast aluminium
- Recessed spotlight with effortless installation
- Premium powder coated finish
- SMD (Surface Mount Device) technology
- Technology for maximum efficiency
- Zero multiple shadows
- LED with effective colour rendering
- Overflowing colours with soft light and shadow
- Interpretation of the real environment light and colours
- High colour rendering

Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

DUSTER TRIMLESS



DUSTER TRIMLESS-40

System Power	Dimension
5W	Dia- 40mm, Overall Width- 110mm, Height- 53mm

DUSTER TRIMLESS- 52

System Power	Dimension
8W	Dia- 52mm, Overall Width- 120mm, Height- 70mm
10W	Dia- 52mm, Overall Width- 120mm, Height- 70mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

26°

36°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Recessed

Material Colour

RAL As Per Request