
ELEVATE DOUBLE HEAD BOLLARD



divinity lights





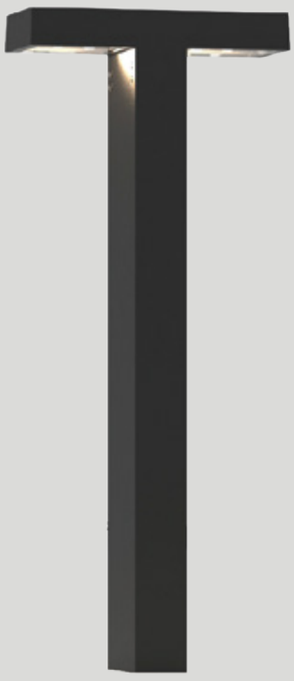



ELEVATE DOUBLE HEAD BOLLARD

Elevate Double Head Bollard fixture has :

· Luminaire housing of Aluminium

· IP66, High Ingress Protection against dust & moisture

· Flicker free operation for eye protection

· Energy-efficient LED with high colour rendering

· The built quality ensures long and maintenance free service life

· Optimum for every outdoor space including society parks, streets, educational institutes, and pathways

· Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort

· Sustainable LED technology offers durability and optimal light output with low power consumption

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

Non-Dimmable

SDCM<3

Clear Glass


L70 @50,000h


Aluminium Die-Cast

Type

Surface

Single Line Diagram

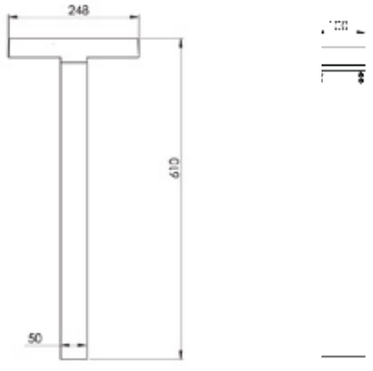



CRI ≥ 80

divinity lights

ELEVATE DOUBLE HEAD BOLLARD



System Power	Dimensions
10WX2	L=248mm W=100mm H=610mm
15WX2	L=248mm W=100mm H=610mm

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

CRI

>80

Beam Angle

30 ^{0}

Control

Non-Dimmable

Dali Dimmable



Mounting Type

Surface

Material Color

RAL As Per Request