


LUMINAIRE PHOTOMETRIC TEST REPORT

Report number:


MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, 301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

DATA OF LAMP		Imax (cd)	2324	S/MH (C0/180)	0.33
MODEL	ELLIS 45	EFFICIENCY (%)	100.0	S/MH (C90/270)	0.42
NOMINAL POWER (W)	6	TOTAL FLUX (lm)	477.59	Voltage (V)	219.6
RATED VOLTAGE (V)	220	EFFICIENCY (lm/W)	85.3	Current (A)	0.027
NOMINAL FLUX (lm)	477.6	η up (%)	0.0	Power (W)	5.600
LAMPS QUANTITY	1	η down (%)	100.0	Power Factor (PF)	0.194
TEST VOLTAGE (V)	219.7	Effective Flux (lm)	403.4	EEI	0.150

LUMINOUS INTENSITY DISTRIBUTION

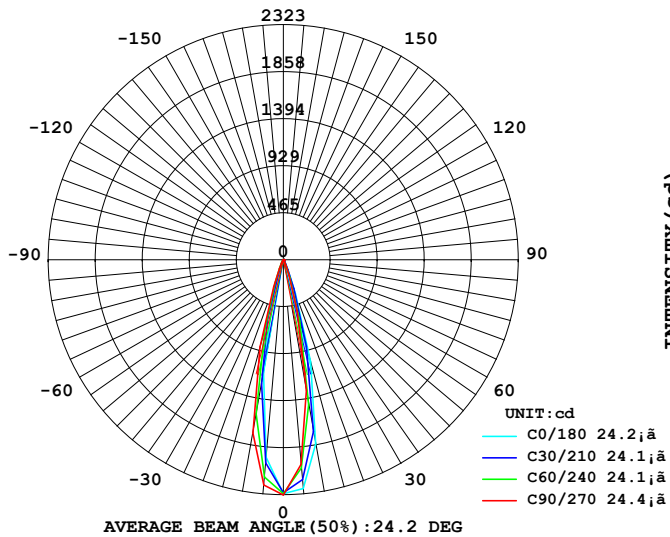

LUMINOUS INTENSITY DISTRIBUTION

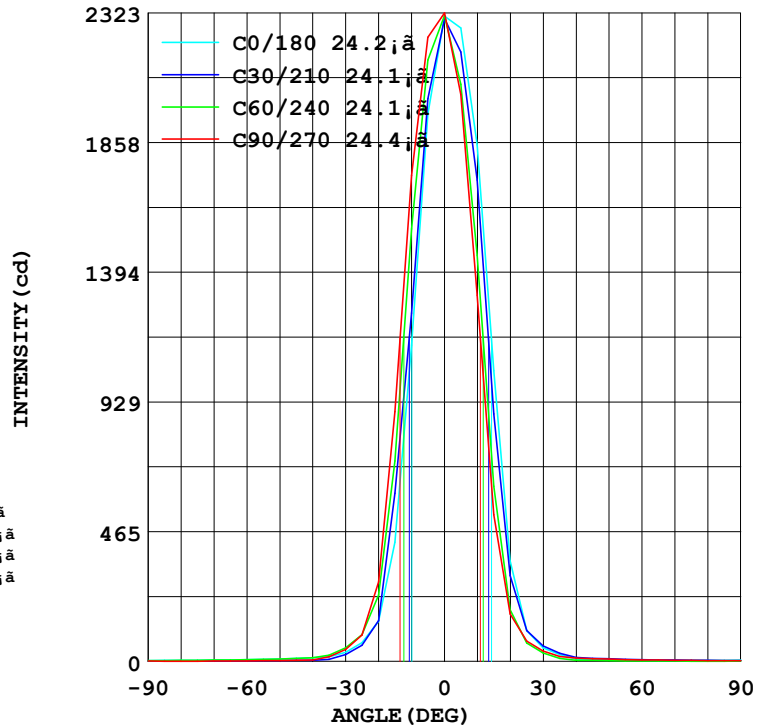

Test System: HOPOO HPG1800
 Temperature: 25.3 DEG
 Operators:
 Test Date: 07-22-2025

Test Set: 5.0 deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 11.000 m
 Remarks: 5700K

Color Temperature Data List

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

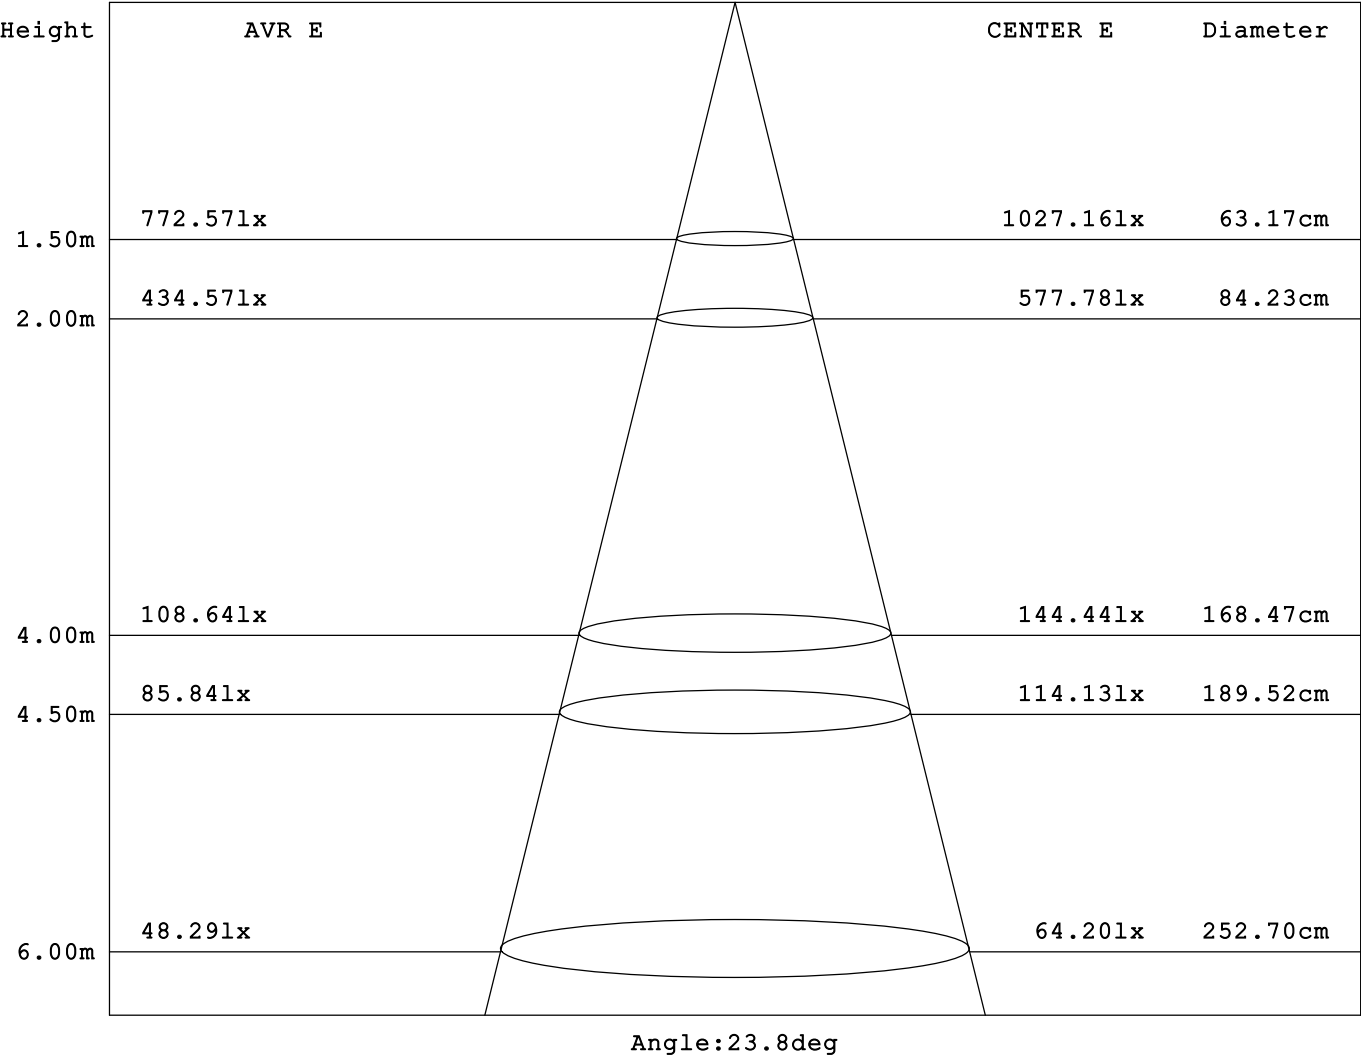

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Zone	total
10.0	1133	1398	1740	1891	1850	1590	1312	1149	0- 10	182.7	182.7
20.0	143.3	191.5	285.3	378.3	360.0	246.5	169.7	132.3	10- 20	211.7	394.5
30.0	33.03	36.54	42.95	57.53	48.52	43.07	37.63	25.41	20- 30	50.09	444.6
40.0	12.70	8.530	5.445	11.97	9.075	9.498	11.85	7.381	30- 40	13.53	458.1
50.0	9.075	5.989	3.267	6.534	5.566	6.110	8.107	4.961	40- 50	5.816	464.0
60.0	6.413	3.811	1.694	4.356	4.235	4.053	5.566	3.388	50- 60	4.511	468.5
70.0	5.082	3.085	1.210	2.964	3.872	3.085	4.235	2.541	60- 70	3.538	472.0
80.0	4.114	2.420	0.968	2.359	3.751	2.359	3.267	1.996	70- 80	2.966	475.0
90.0	3.388	2.299	1.210	1.936	4.961	1.996	2.541	1.754	80- 90	2.582	477.5
100.0									90-100		
110.0									100-110		
120.0									110-120		
130.0									120-130		
140.0									130-140		
150.0									140-150		
160.0									150-160		
170.0									160-170		
180.0									170-180		
DEG	LUMINOUS INTENSITY:cd									UNIT:lm	

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:11.000 m
 Remarks: 5700K

LUMINANCE LIMITATION CURVES

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
		2000	1000	500	<=300				
1.15	A								
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300



LUMINANCE cd/m2

G (DEG)	C0/180	C90/270
85	416	111
80	237	56
75	173	42
70	149	35
65	135	34
60	128	34
55	129	44
50	141	51
45	151	53


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

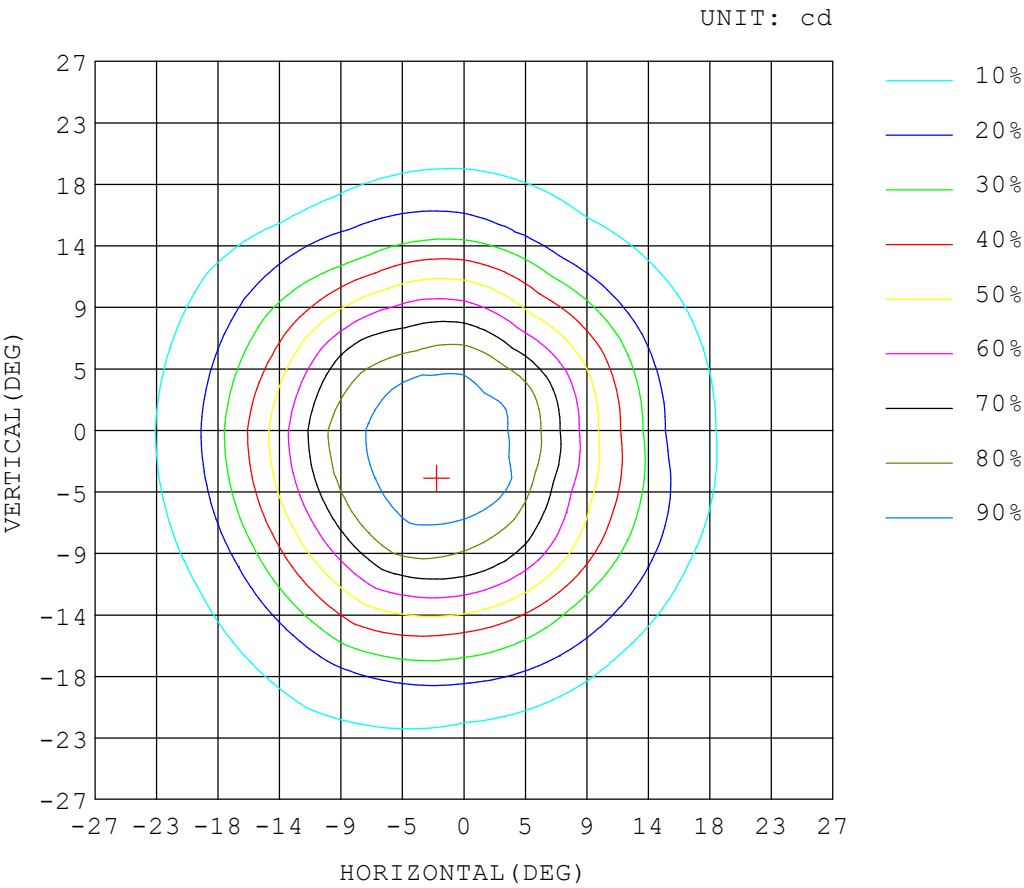


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K

ISOLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

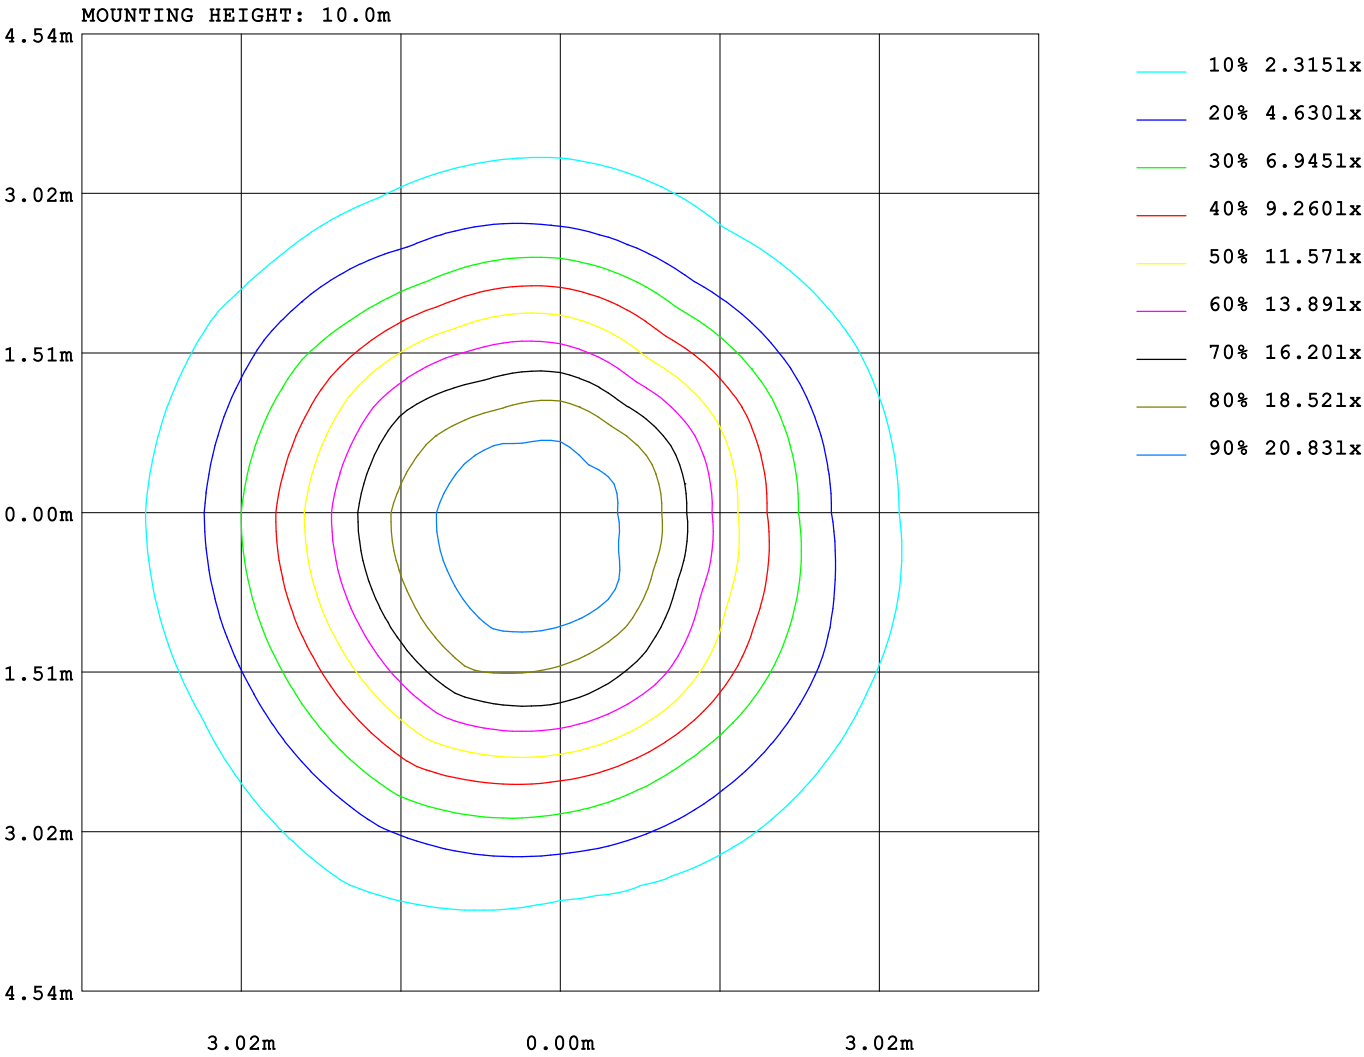

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K


Report number:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS															
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019															
NAME: ELLIS 45								TYPE: 5700K CRI-90				WEIGHT:			
SPECIFICATION: OSRAM 250 MA								DIMENSION: D-52 CUT-45 H-72 MM				SERIAL No.:			

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pf _c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.09	1.10	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.98	.98	.96
2.0	1.07	1.04	1.01	1.05	1.03	1.00	1.02	.99	.98	.99	.98	.96	.97	.95	.94	.93
3.0	1.02	.99	.96	1.01	.98	.95	.99	.96	.94	.96	.94	.92	.94	.92	.91	.89
4.0	.99	.94	.91	.97	.94	.91	.95	.92	.90	.94	.91	.89	.92	.90	.88	.87
5.0	.95	.91	.88	.94	.90	.87	.93	.89	.87	.91	.88	.86	.90	.87	.85	.84
6.0	.92	.88	.85	.91	.87	.84	.90	.86	.84	.89	.86	.83	.88	.85	.83	.82
7.0	.89	.85	.82	.89	.85	.82	.87	.84	.81	.86	.83	.81	.85	.83	.81	.80
8.0	.87	.82	.80	.86	.82	.79	.85	.82	.79	.84	.81	.79	.83	.81	.79	.78
9.0	.84	.80	.77	.84	.80	.77	.83	.80	.77	.82	.79	.77	.82	.79	.77	.76
10.0	.82	.78	.75	.82	.78	.75	.81	.78	.75	.80	.77	.75	.80	.77	.75	.74

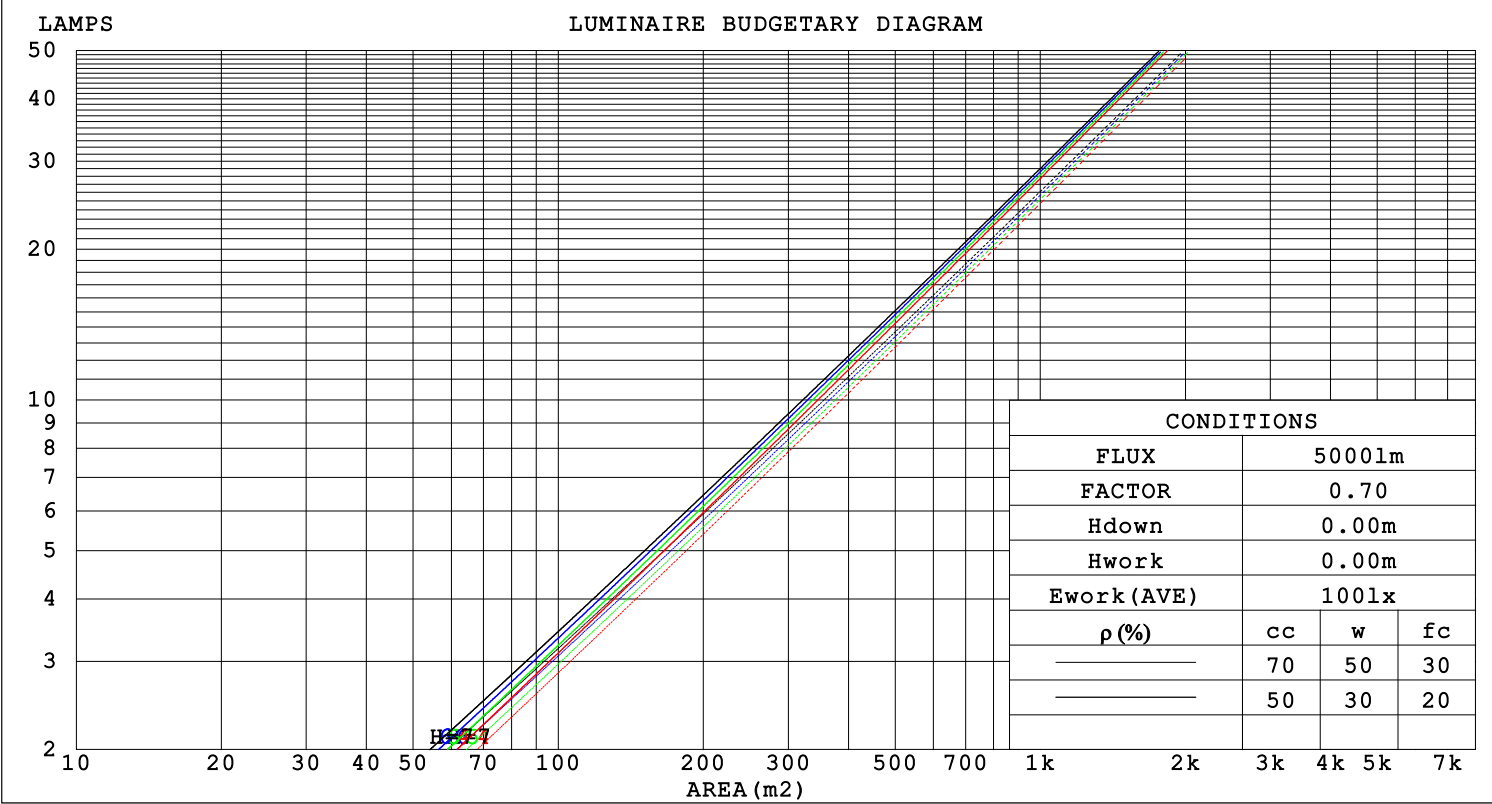

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K

WEC AND CCEC

Report number:

MANUFACTURER: DIVINITY LIGHTS															
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019															
NAME: ELLIS 45								TYPE: 5700K CRI-90				WEIGHT:			
SPECIFICATION: OSRAM 250 MA								DIMENSION: D-52 CUT-45 H-72 MM				SERIAL No.:			

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.146	.083	.026	.139	.079	.025	.126	.073	.023	.115	.066	.021	.105	.061	.020	
2.0	.132	.073	.022	.127	.070	.022	.117	.065	.020	.107	.060	.019	.098	.056	.018	
3.0	.122	.065	.019	.117	.063	.019	.109	.059	.018	.101	.055	.017	.094	.052	.016	
4.0	.113	.059	.017	.109	.057	.017	.102	.054	.016	.095	.051	.015	.089	.048	.015	
5.0	.106	.054	.016	.103	.053	.015	.096	.050	.015	.091	.048	.014	.085	.046	.014	
6.0	.099	.050	.014	.097	.049	.014	.091	.047	.014	.086	.045	.013	.082	.043	.013	
7.0	.094	.046	.013	.092	.046	.013	.087	.044	.013	.083	.042	.012	.079	.041	.012	
8.0	.089	.044	.012	.087	.043	.012	.083	.041	.012	.079	.040	.012	.076	.039	.011	
9.0	.085	.041	.011	.083	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011	
10.0	.081	.039	.011	.079	.038	.011	.076	.037	.011	.073	.036	.010	.070	.035	.010	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016	
2.0	.151	.133	.117	.129	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.014	
3.0	.136	.113	.095	.117	.098	.083	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.123	.098	.079	.106	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009	
5.0	.113	.086	.066	.097	.074	.057	.067	.052	.040	.039	.030	.024	.012	.010	.008	
6.0	.104	.076	.056	.089	.066	.048	.061	.046	.034	.036	.027	.020	.011	.009	.007	
7.0	.096	.067	.048	.082	.058	.041	.057	.041	.029	.033	.024	.017	.011	.008	.006	
8.0	.089	.061	.041	.077	.053	.036	.053	.037	.025	.031	.022	.015	.010	.007	.005	
9.0	.083	.055	.036	.072	.048	.031	.050	.034	.022	.029	.020	.013	.009	.006	.004	
10.0	.078	.050	.031	.067	.044	.027	.047	.031	.019	.027	.018	.012	.009	.006	.004	

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:11.000 m
 Remarks: 5700K

Uncorrected UGR Table

Report number:

MANUFACTURER: DIVINITY LIGHTS											
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019											
NAME: ELLIS 45					TYPE: 5700K CRI-90			WEIGHT:			
SPECIFICATION: OSRAM 250 MA					DIMENSION: D-52 CUT-45 H-72 MM			SERIAL No.:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		-5.1	-4.5	-4.9	-4.3	-4.2	-4.5	-3.8	-4.3	-3.7	-3.5
	3H	-2.6	-2.0	-2.4	-1.8	-1.6	-3.4	-2.8	-3.2	-2.6	-2.4
	4H	-1.1	-0.5	-0.8	-0.3	-0.1	-2.9	-2.3	-2.6	-2.1	-1.9
	6H	0.7	1.2	1.0	1.5	1.7	-2.3	-1.8	-2.1	-1.6	-1.3
	8H	1.6	2.2	1.9	2.4	2.7	-2.1	-1.5	-1.8	-1.3	-1.0
	12H	2.8	3.3	3.1	3.5	3.8	-1.7	-1.1	-1.4	-0.9	-0.6
4H	2H	-4.5	-3.9	-4.3	-3.7	-3.5	-3.9	-3.3	-3.6	-3.1	-2.9
	3H	-2.2	-1.7	-1.9	-1.4	-1.1	-2.0	-1.5	-1.7	-1.2	-0.9
	4H	-0.6	-0.2	-0.3	0.1	0.4	-1.0	-0.5	-0.7	-0.2	0.1
	6H	1.3	1.8	1.7	2.1	2.4	-0.1	0.3	0.3	0.7	1.0
	8H	2.4	2.8	2.8	3.2	3.5	0.3	0.7	0.7	1.1	1.4
	12H	3.8	4.1	4.2	4.5	4.9	0.8	1.2	1.2	1.6	2.0
8H	4H	-0.2	0.2	0.2	0.5	0.9	-0.4	-0.0	-0.1	0.3	0.7
	6H	1.7	2.0	2.1	2.4	2.8	1.2	1.5	1.6	1.9	2.3
	8H	2.8	3.1	3.2	3.5	3.9	2.0	2.3	2.5	2.8	3.2
	12H	4.4	4.7	4.9	5.1	5.6	2.9	3.1	3.4	3.6	4.1
12H	4H	-0.0	0.3	0.4	0.7	1.1	-0.4	-0.1	-0.0	0.3	0.7
	6H	1.9	2.2	2.3	2.6	3.0	1.4	1.7	1.8	2.1	2.5
	8H	3.0	3.3	3.5	3.7	4.2	2.5	2.7	3.0	3.2	3.7
Variations with the observer position at spacings:											
S = 1.0H		+ 0.3 / - 0.2					+ 0.2 / - 0.2				
1.5H		+ 0.5 / - 0.3					+ 0.3 / - 0.5				
2.0H		+ 0.7 / - 0.5					+ 0.6 / - 0.8				

CIE Pub.117 Corrected 477.5 lm Total Lamp Luminous Flux.(8log(F/F0) = -2.6)

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K

UTILIZATION FACTORS TABLE

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	89	83	79	88	83	79	76
0.80	96	91	87	96	90	87	94	90	87	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	108	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:11.000 m
 Remarks: 5700K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

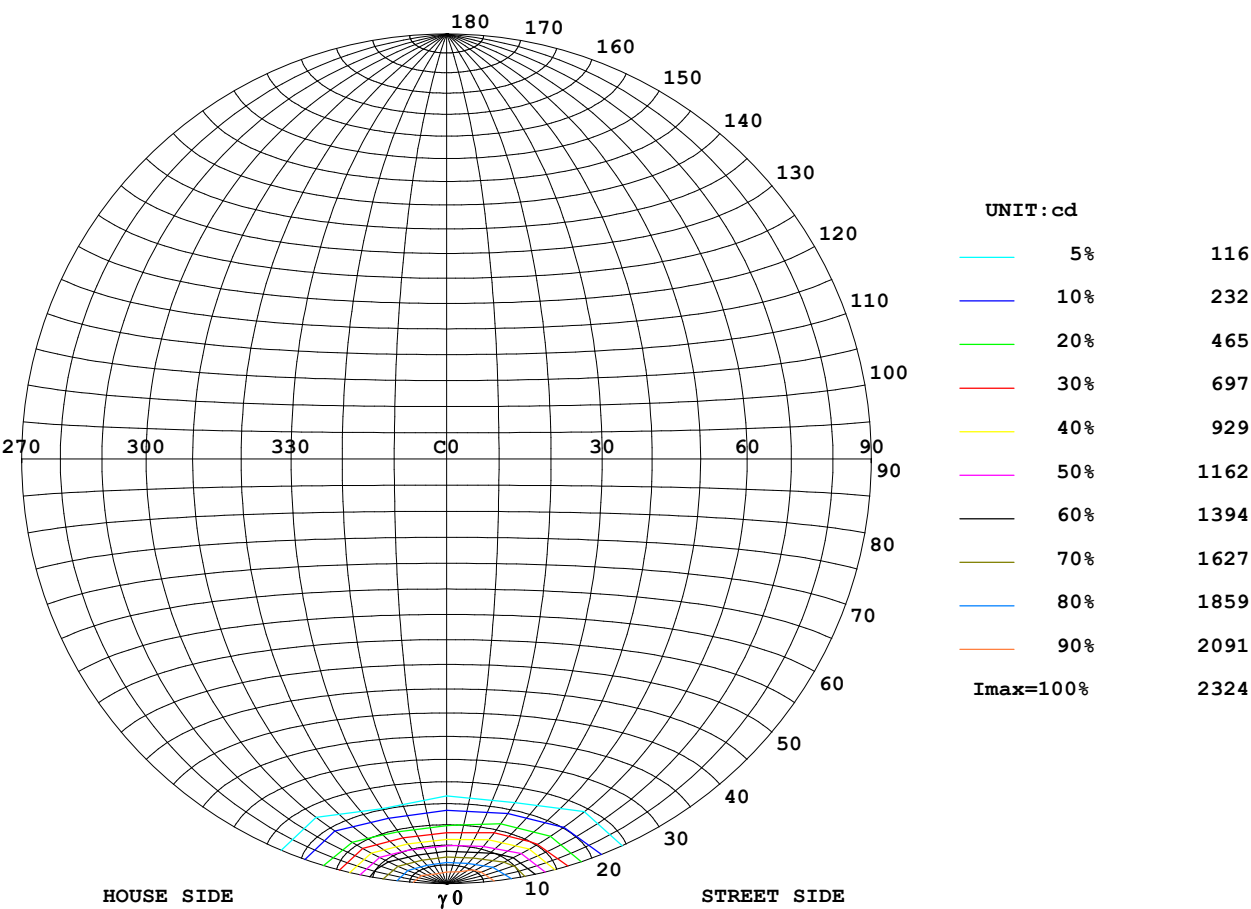

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025



Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K

ISOLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

ILLUMINANCE AT MH=10 m,Enadir = 23.11 lx

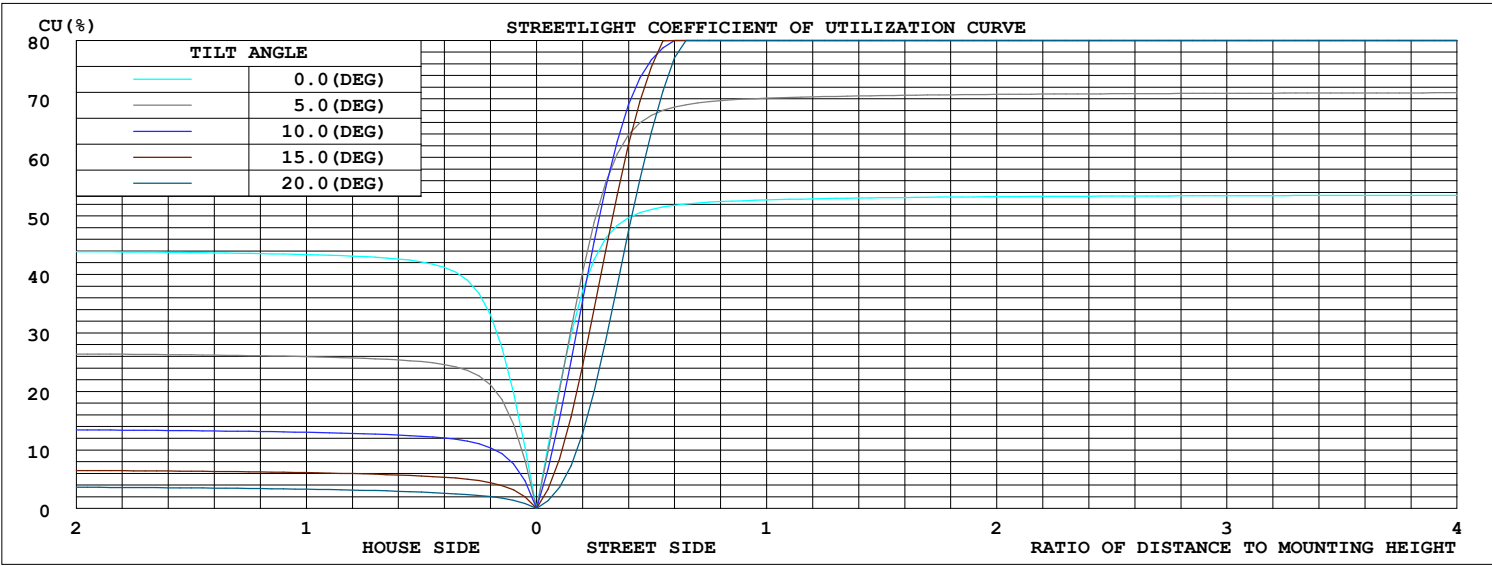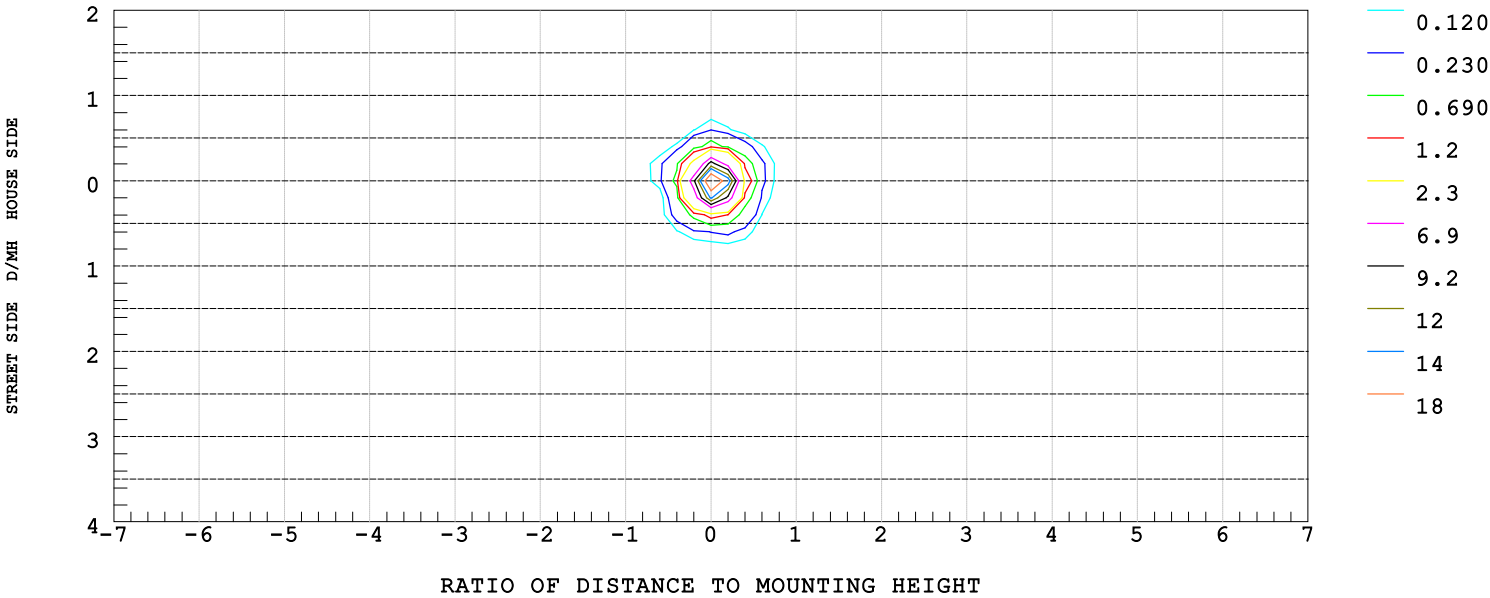


Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

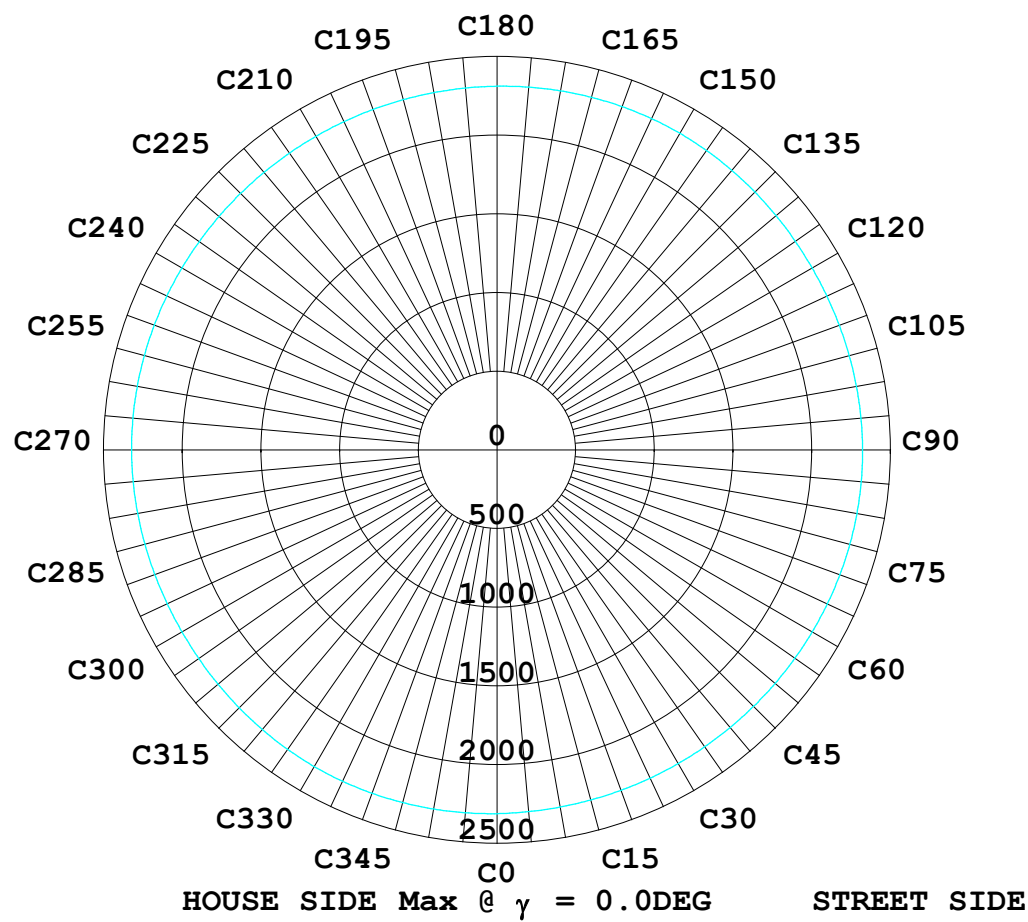

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: ELLIS 45	TYPE: 5700K CRI-90	WEIGHT:
SPECIFICATION: OSRAM 250 MA	DIMENSION: D-52 CUT-45 H-72 MM	SERIAL No.:

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330
0.0	2311	2302	2313	2323	2312	2324	2311	2302	2313	2323	2312	2324
5.0	1960	2015	2154	2235	2321	2289	2269	2182	2066	2030	1943	1980
10.0	1133	1247	1548	1740	1917	1866	1850	1724	1455	1312	1129	1169
15.0	427	602	718	894	1103	1056	1040	887	627	526	388	430
20.0	143	146	237	285	403	354	360	308	185	170	120	145
25.0	66.6	58.0	95.5	94.2	138	109	111	111	65.8	72.6	48.4	66.0
30.0	33.0	24.3	48.7	42.9	67.1	47.9	48.5	55.6	30.4	37.6	19.2	31.5
35.0	16.6	7.74	22.6	17.1	35.8	23.2	24.8	29.5	11.2	18.0	5.80	15.6
40.0	12.7	4.11	12.9	5.44	16.8	7.13	9.07	14.7	4.23	11.8	3.38	11.3
45.0	10.6	3.63	10.7	3.75	11.8	3.87	6.05	11.2	3.50	9.92	2.90	9.43
50.0	9.07	3.02	8.95	3.26	9.80	3.26	5.56	9.43	2.78	8.10	2.17	7.74
55.0	7.38	2.29	7.26	2.54	8.10	2.78	4.84	7.86	2.17	6.65	1.57	6.41
60.0	6.41	1.81	5.80	1.69	6.65	2.05	4.23	6.41	1.69	5.56	1.33	5.44
65.0	5.68	1.69	5.08	1.45	5.44	1.45	3.87	5.44	1.45	4.84	1.08	4.71
70.0	5.08	1.57	4.59	1.21	4.71	1.21	3.87	4.84	1.33	4.23	0.97	4.11
75.0	4.47	1.45	3.87	1.08	4.23	1.08	3.63	4.11	1.08	3.75	0.85	3.63
80.0	4.11	1.33	3.50	0.97	3.63	1.08	3.75	3.63	1.08	3.26	0.85	3.14
85.0	3.63	1.33	3.14	0.97	3.26	1.08	3.75	3.14	0.97	2.78	0.73	2.78
90.0	3.38	1.81	2.78	1.21	2.78	1.08	4.96	2.78	1.21	2.54	0.97	2.54

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:07-22-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:11.000 m
Remarks: 5700K