

EVON

Evon Flood Light has:

- Luminaire housing of die cast- aluminium
- Surface Mounted
- CCT - 2700K, 3000K, 4000K, RGBW
- Surface powder coated
- DMX Protocol for digital lighting control
- Clear tempered glass
- Zero multiple shadows
- Various beam angle range from 10° to 60°
- LED with effective colour rendering
- Interpretation of the real environment light
- Finned heat sinks to dissipate heat and increase performance

Quick Info

CRI ≥ 80/90

2700K, 3000K, 4000K, RGBW

Up to 85 lm/W

Non-Dimmable/ Dali-Dimmable

/DMX-Controller

SDCM<3

Clear Tempered Glass


L70 @50,000h

Aluminium Die-Cast


Types

Surface

Single Line Diagram

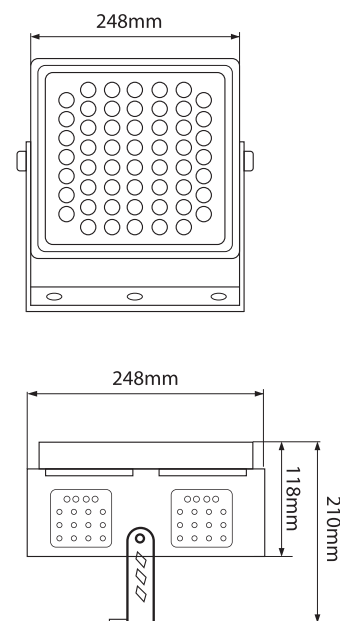

Light Distribution



CRI ≥ 80/90

EVON



Product Order Code	System Power	Dimensions
1544	100W	L=248mm W=248mm H=210mm

Order Options

CCT (Colour Temperature)

2700K

3000K

4000K

RGBW

CRI

>80

>90

Beam Angle

10°

15°

25°

45°

60°

Control

Non-Dimmable



Dali-Dimmable



DMX Controller



Mounting Type

Surface

Material Colour

Grey

