


FIRE FOX RING

Direct | Surface

FIRE FOX RING

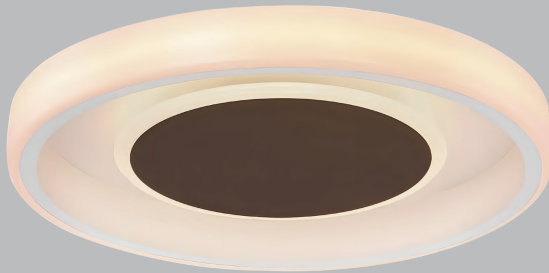

FIRE FOX RING



Quick Info

Mounting Type

Surface

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

110°

Optics

Acrylic Diffuser

Efficacy

3000K- 66.5

4000K- 81.6

5700K- 98.4

Tunable White 2700K-6500K- 81.6

Electrical

Wattage -40W

Input Voltage- 220-240 VAC

Physical Dimensions

Length- $\varnothing 495$ mm

Height- 90mm

FIRE FOX RING is Concentric circle ring luminaire in aluminium + acrylic housing and with premium powder coating finish.

Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency Acrylic provides glare control and uniform illumination.

For 495mm Ring

Available in 495mm diameter and with height 90mm, this fixture is crafted for direct light distribution making it ideal for home decoration & professional applications.

Customisations in Wattages and Dimensions available as per request to enhance installation and functionality.

Single Line Diagram

surface

90

