

## FIRE FOX RING

divinity lights



## Quick Info

CRI  $\geq 90$

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM $<3$

Acrylic Diffuser


L70 @50,000h

Aluminium

## Types

Pendant/ Surface


## Single Line Diagram

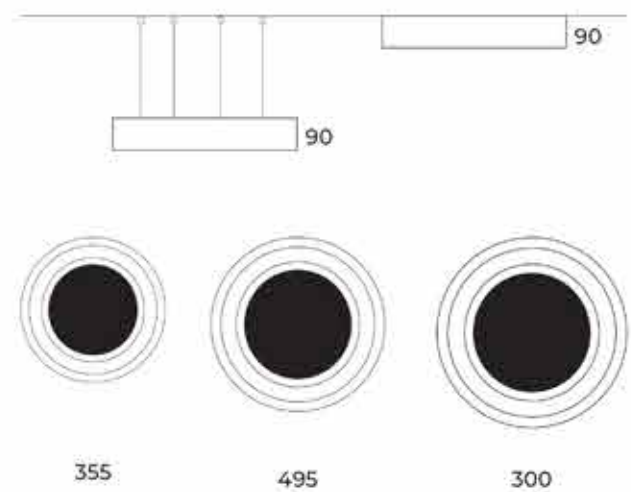

## FIRE FOX RING

Fire Fox Ring fixture has :

- Concentric circles molded in acrylic
- Aluminium + Acrylic luminaire housing
- Premium Finish Powder coating
- High performance Acrylic
- Uniform illumination
- Concentric circles moulded in acrylic
- Energy efficient LED with high colour rendering
- LED PCB mounted
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance



CRI  $\geq 90$



TUNABLE  
WHITE

FIRE FOX RING



FIRE FOX RING

Product Order Code	System Power	Dimension
3024-1	25W	Ø = 355mm, H = 90mm
3024-2	40W	Ø = 495mm, H = 90mm
3024-3	75W	Ø = 300mm, H = 90mm

Order Options

Distribution

Direct

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4



CRI	
>90	1

Beam Angle

110°




Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Mounting Type	
Pendant	1
Surface	2

Accessories

Product Order Code	Accessories Name	Accessories Image
3024-01 	LED PCB	
3024-02	Suspension Wire	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1