
FLASH-S
COLUMN

divinity lights






divinity lights

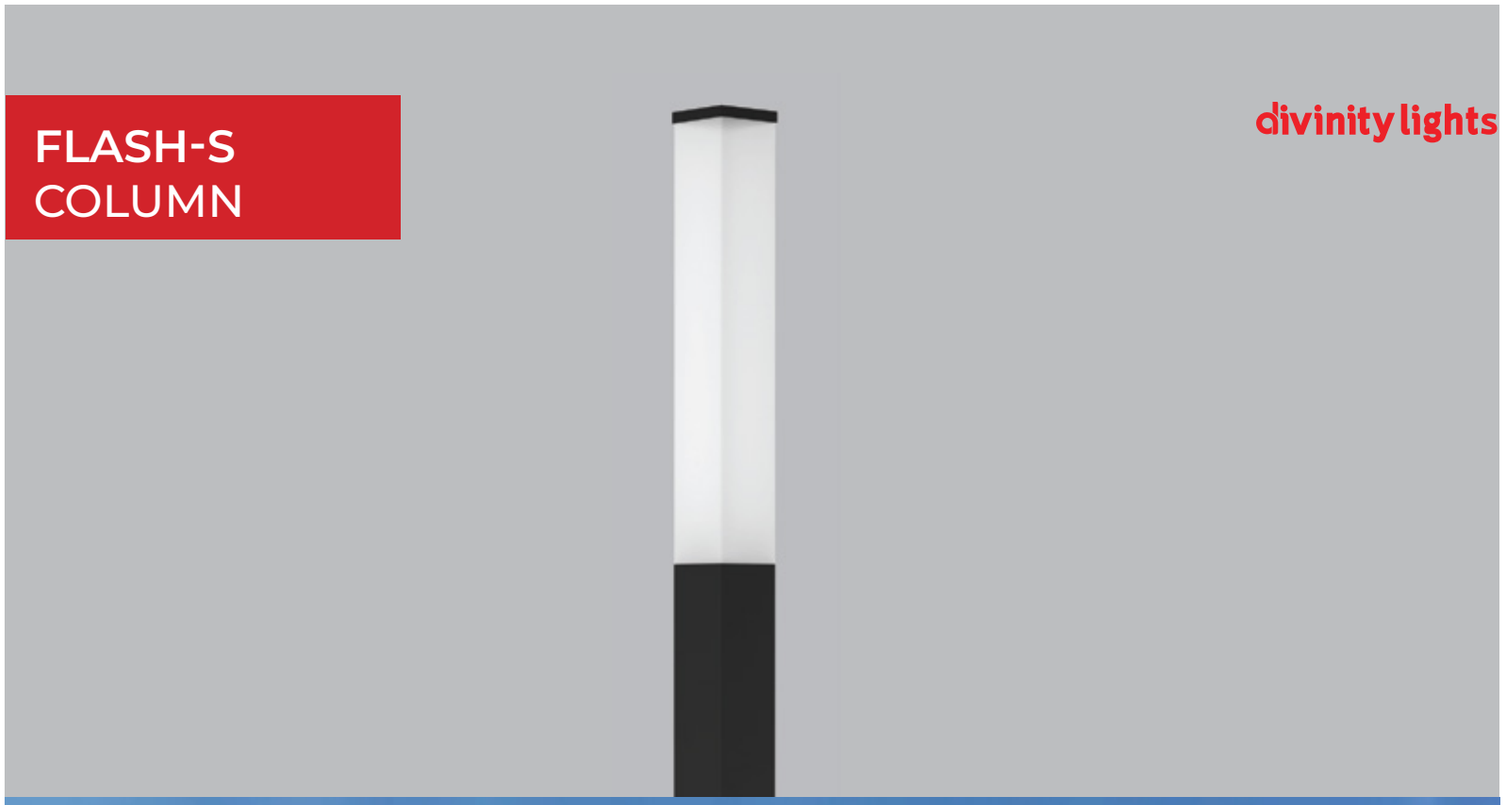







FLASH-S COLUMN

Flash-S Column fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Sustainable LED technology offers durability and optimal light output with low power consumption
- Ideal design for rough outdoor environment
- Precise optics and beautiful form factor


Quick Info


CRI ≥ 80
2700K, 3000K, 4000K
Non-Dimmable/ Dali-Dimmable
SDCM<3
PC Diffuser
L70 @50,000h
Aluminium Die-Cast


Type

Surface

Single Line Diagram

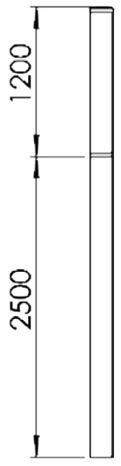





CRI ≥ 80

divinity lights

FLASH-S COLUMN



System Power	Dimensions
30W	LXW=100.5mmX100.5mm, H= 3,700mm

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

CRI

>80

Beam Angle

360°

Control

Non-Dimmable

Dali- Dimmable

Mounting Type

Surface

Material Color

RAL As Per Request