

In.Licht Ultra

FLEXION 65 4000K TM 30 REPORT


Lighting Facts

Color Quality:


CCT	3811.8
Ra	92.1
Rf	88.9
Rg	100.9
Duv	1.0E-4
SDCM	5.03

HCL index:


Illuminance	95.2
EML	64.26
M-EDI	58.26
S/P ratio	1.68
CAF	0.55
RG Risk	RG1
CS	0.12
SVM	0.0
Percent Flicker	0.0
Flicker Index	0.0
Frequency	0.0

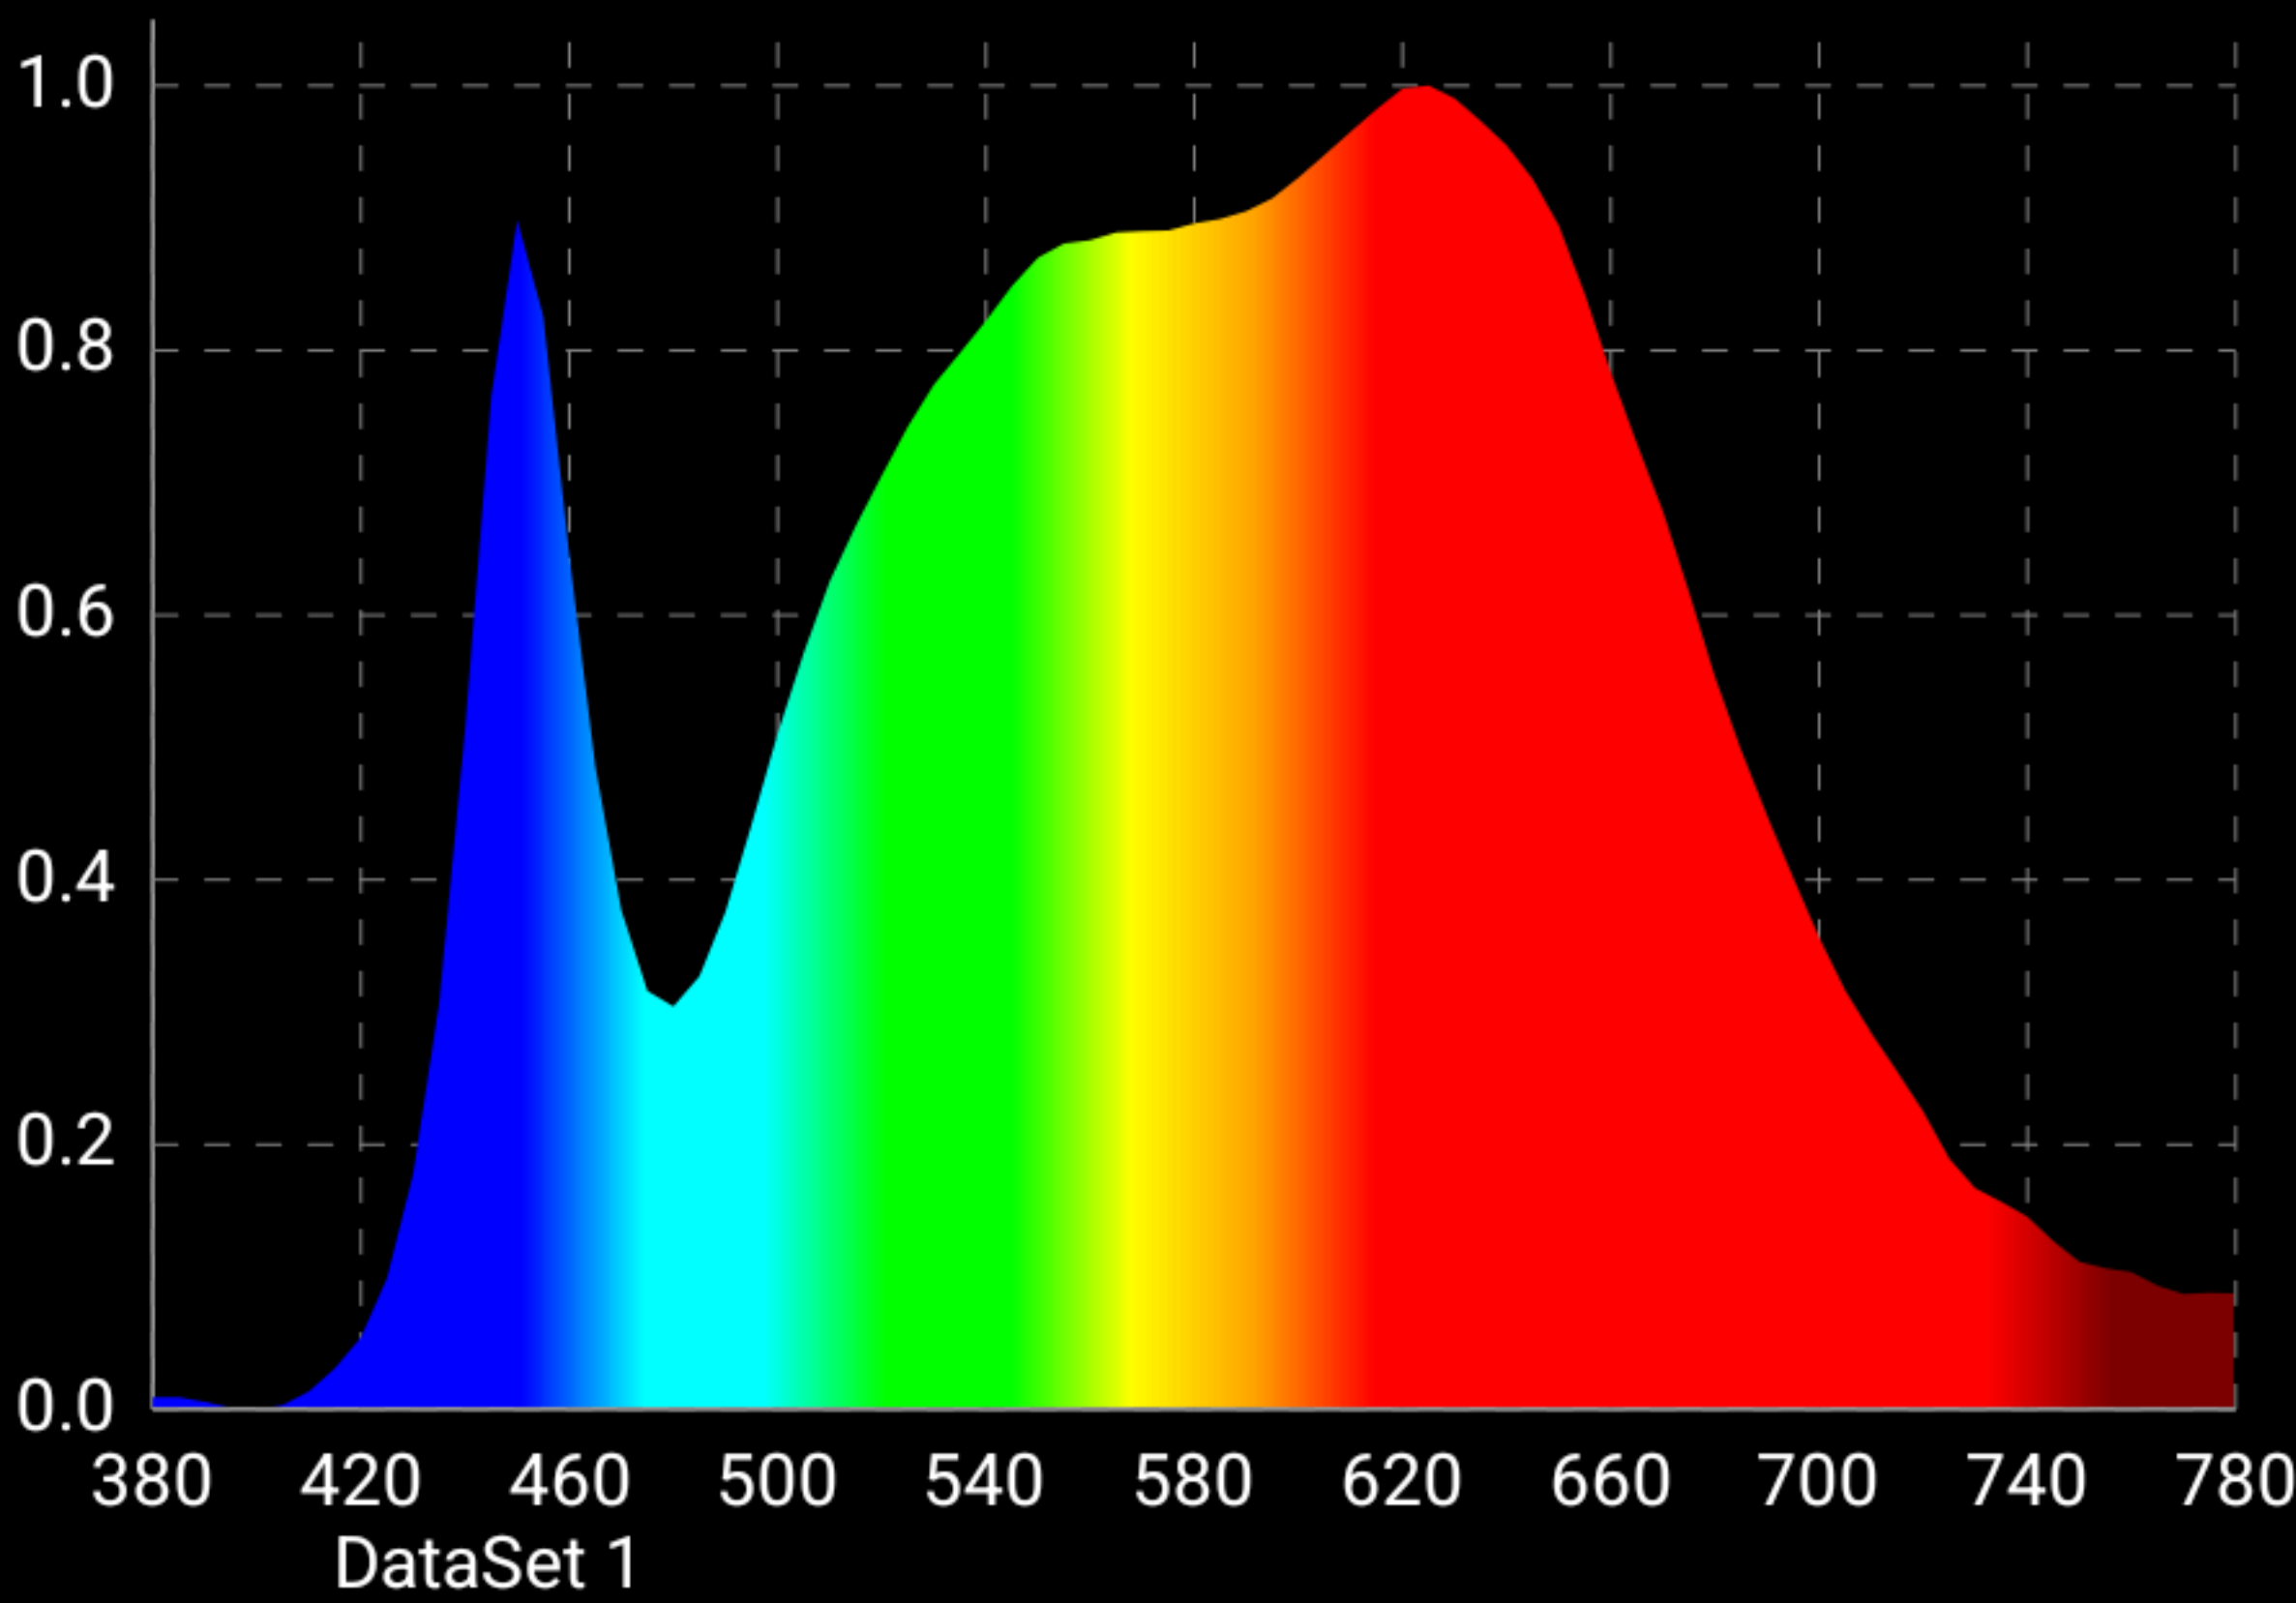

λ_d	583
λ_p	625
λ_{pV}	1.58

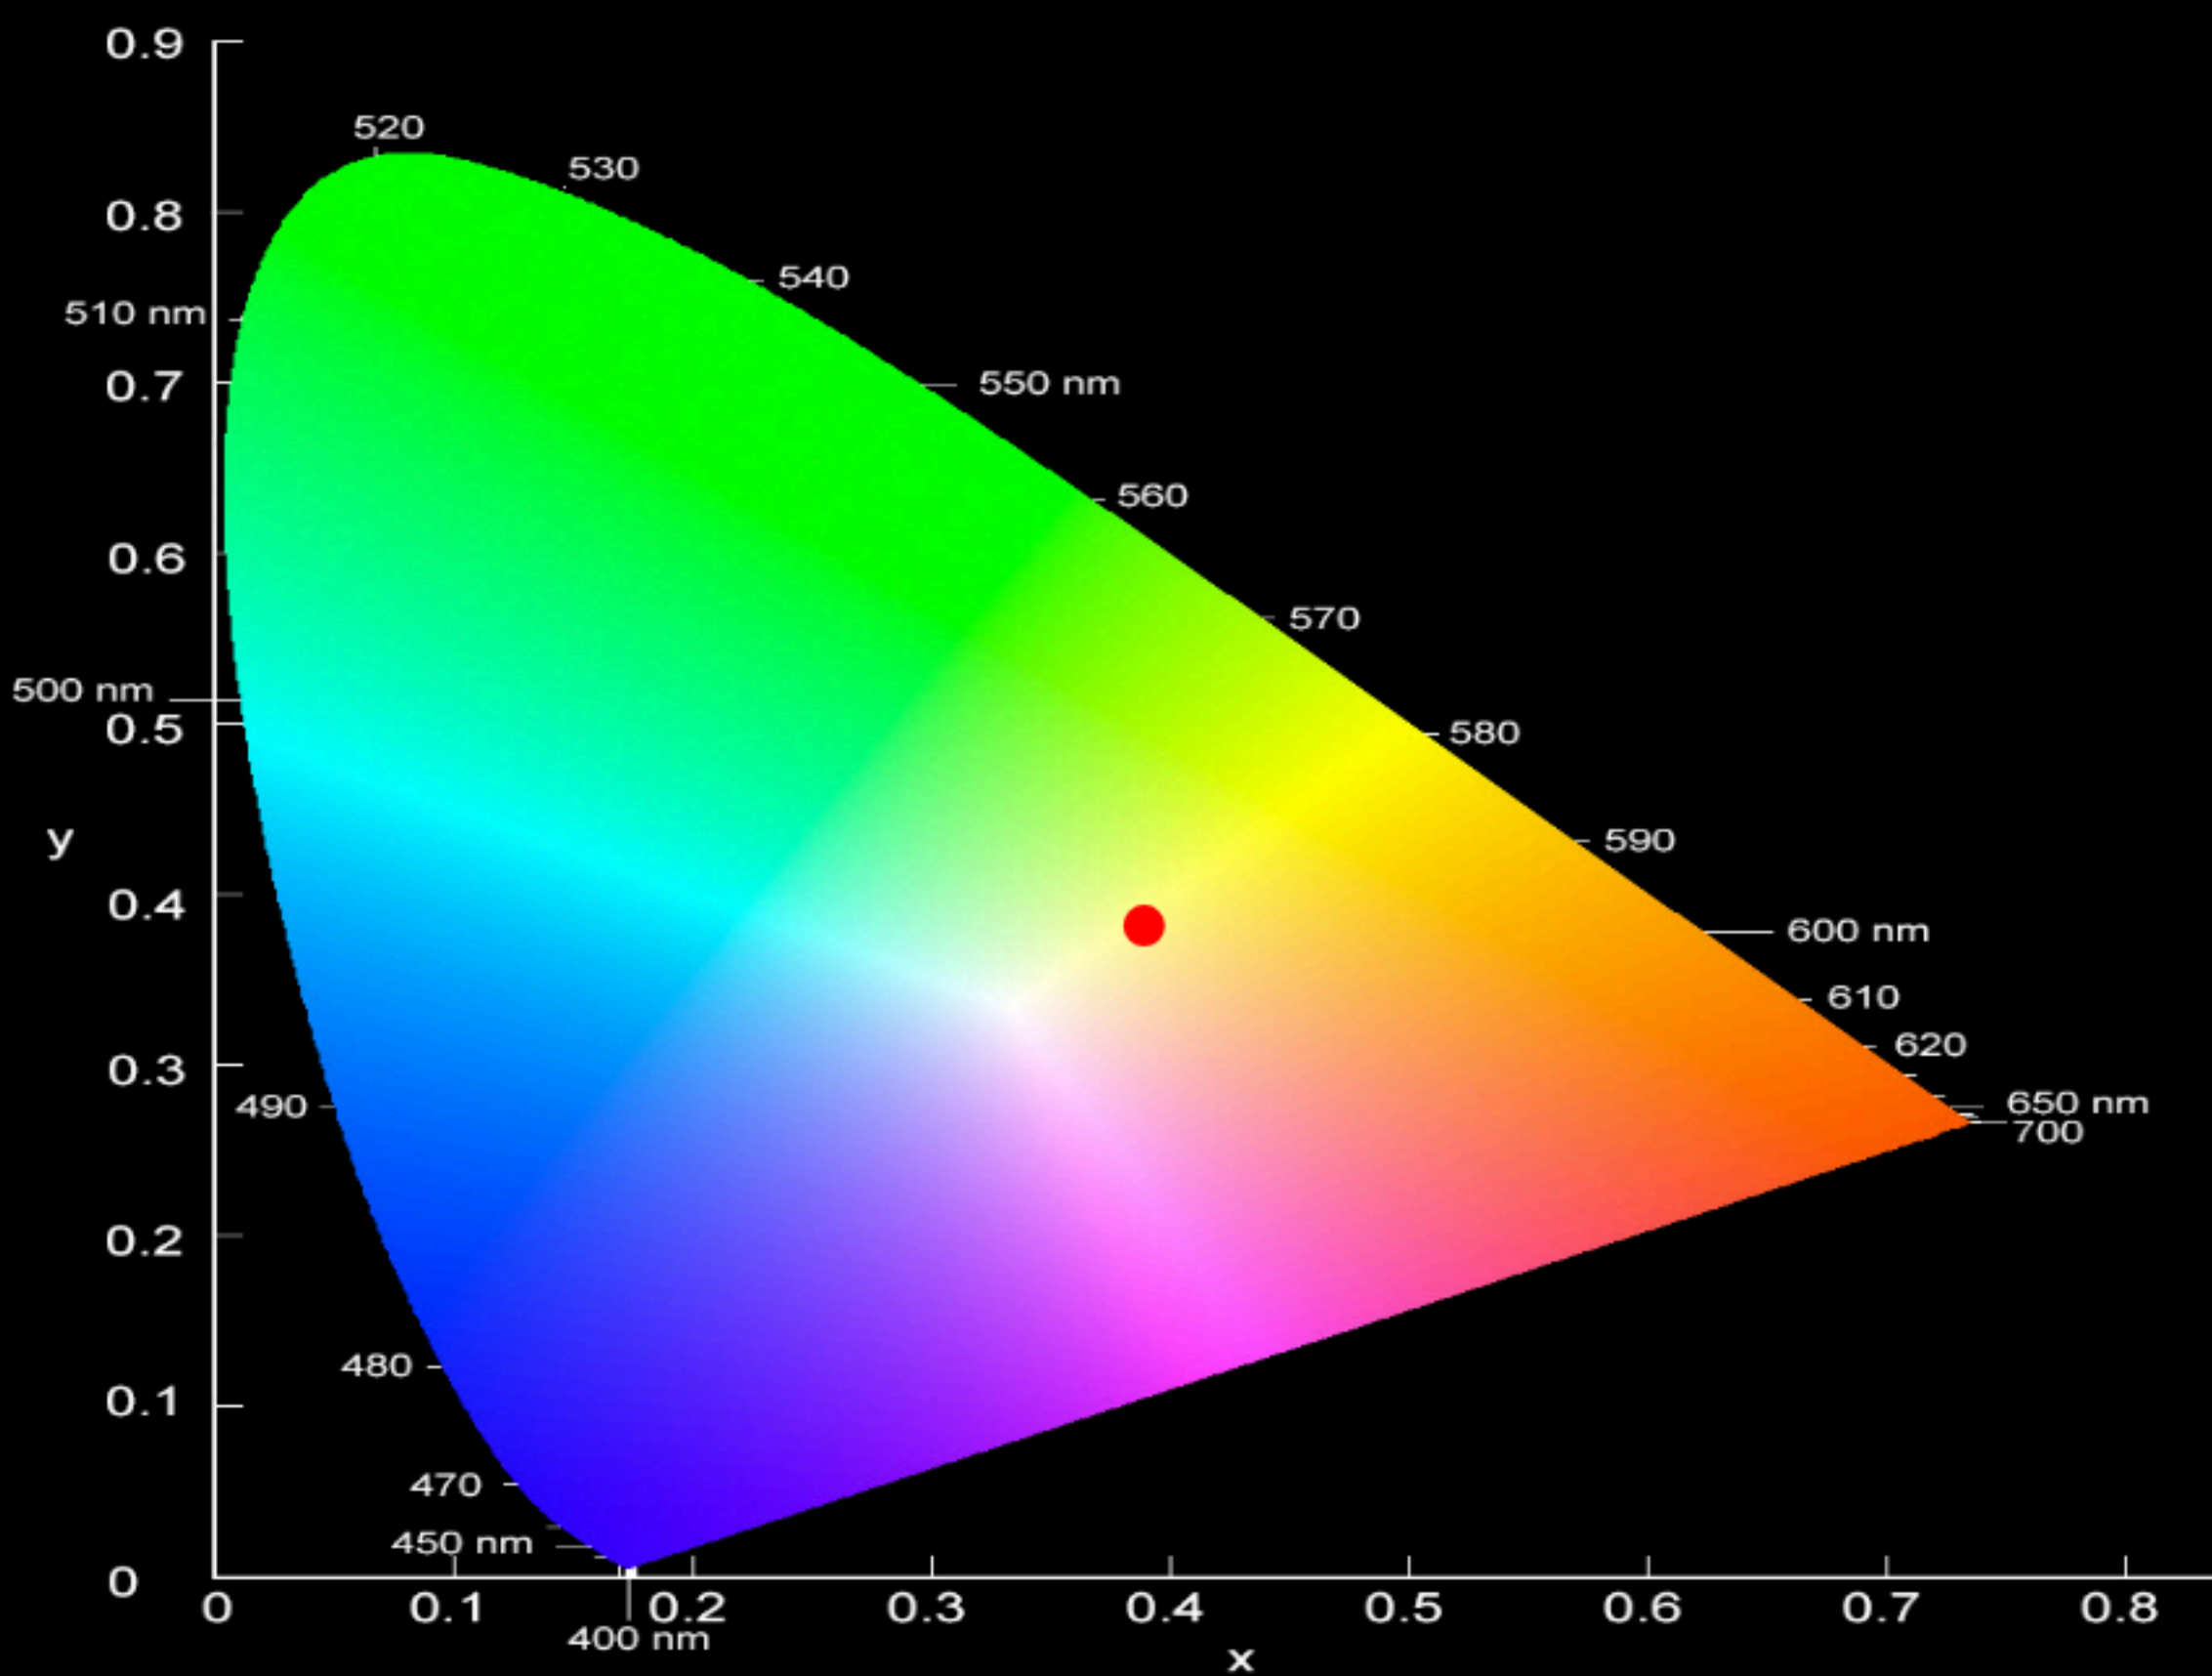


(x,y)	(0.389,0.382)
CCT	3811.8
Duv	1.0E-4

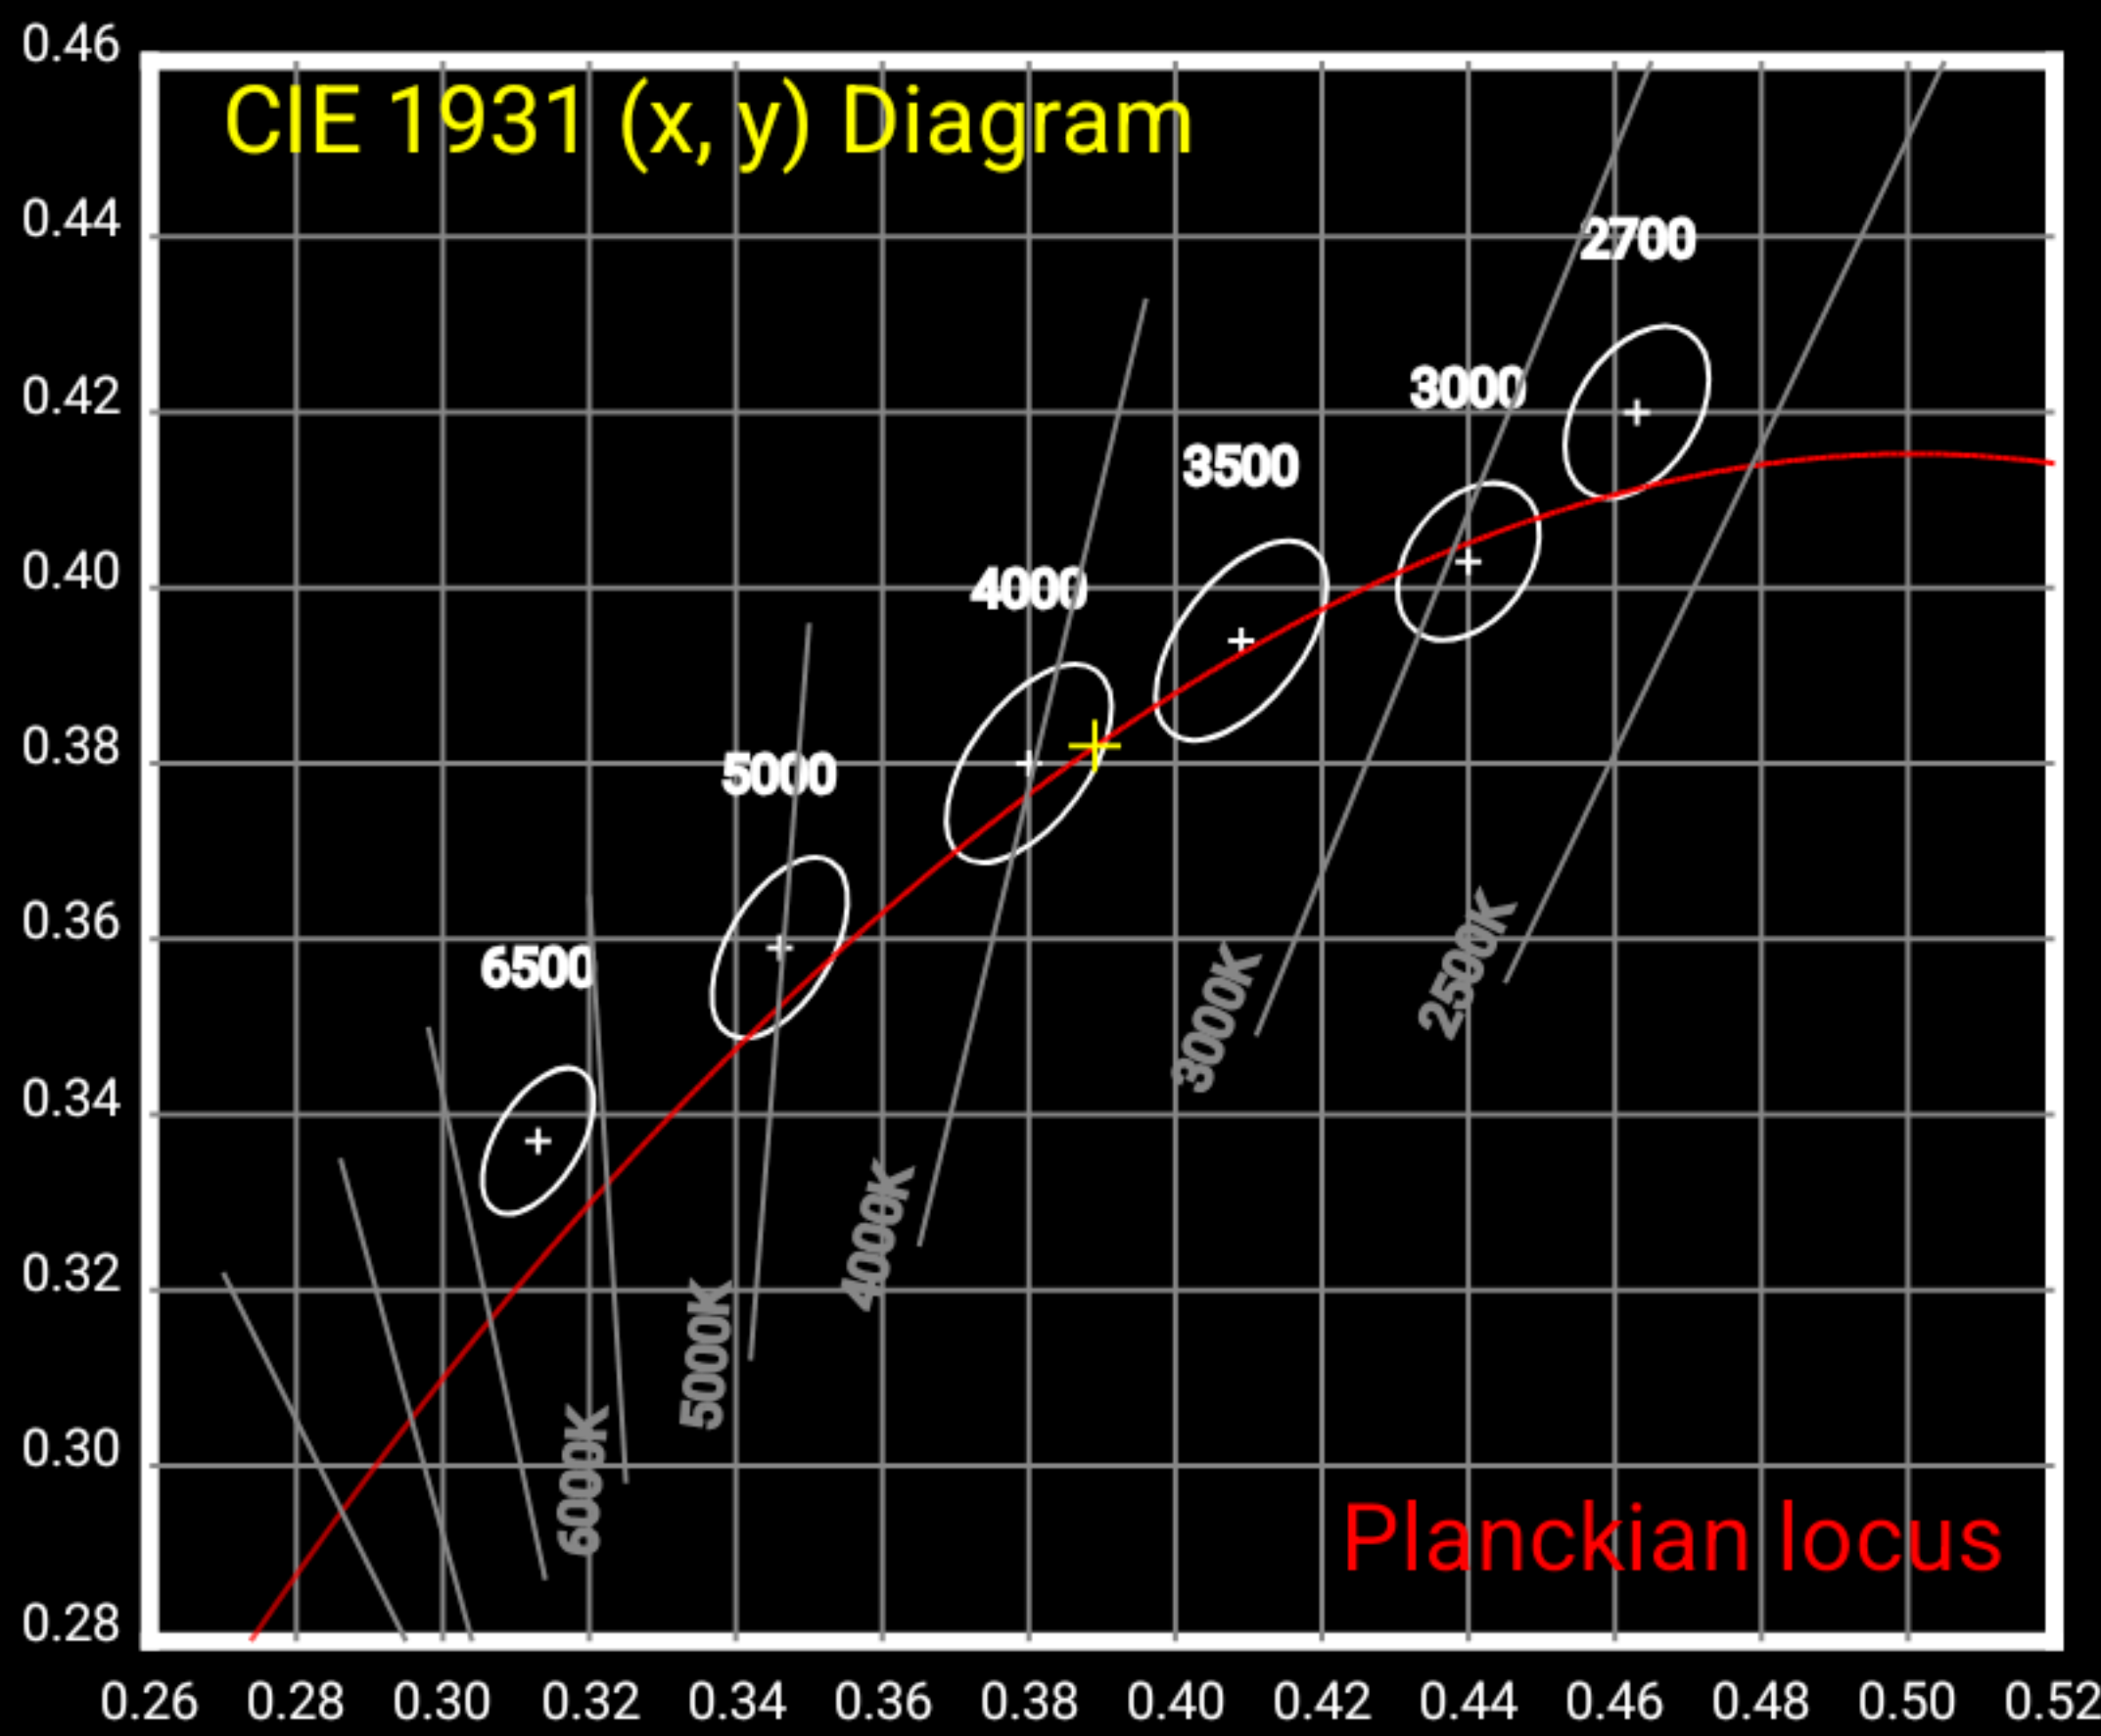


5.03
SDCM

x 0.389
y 0.382

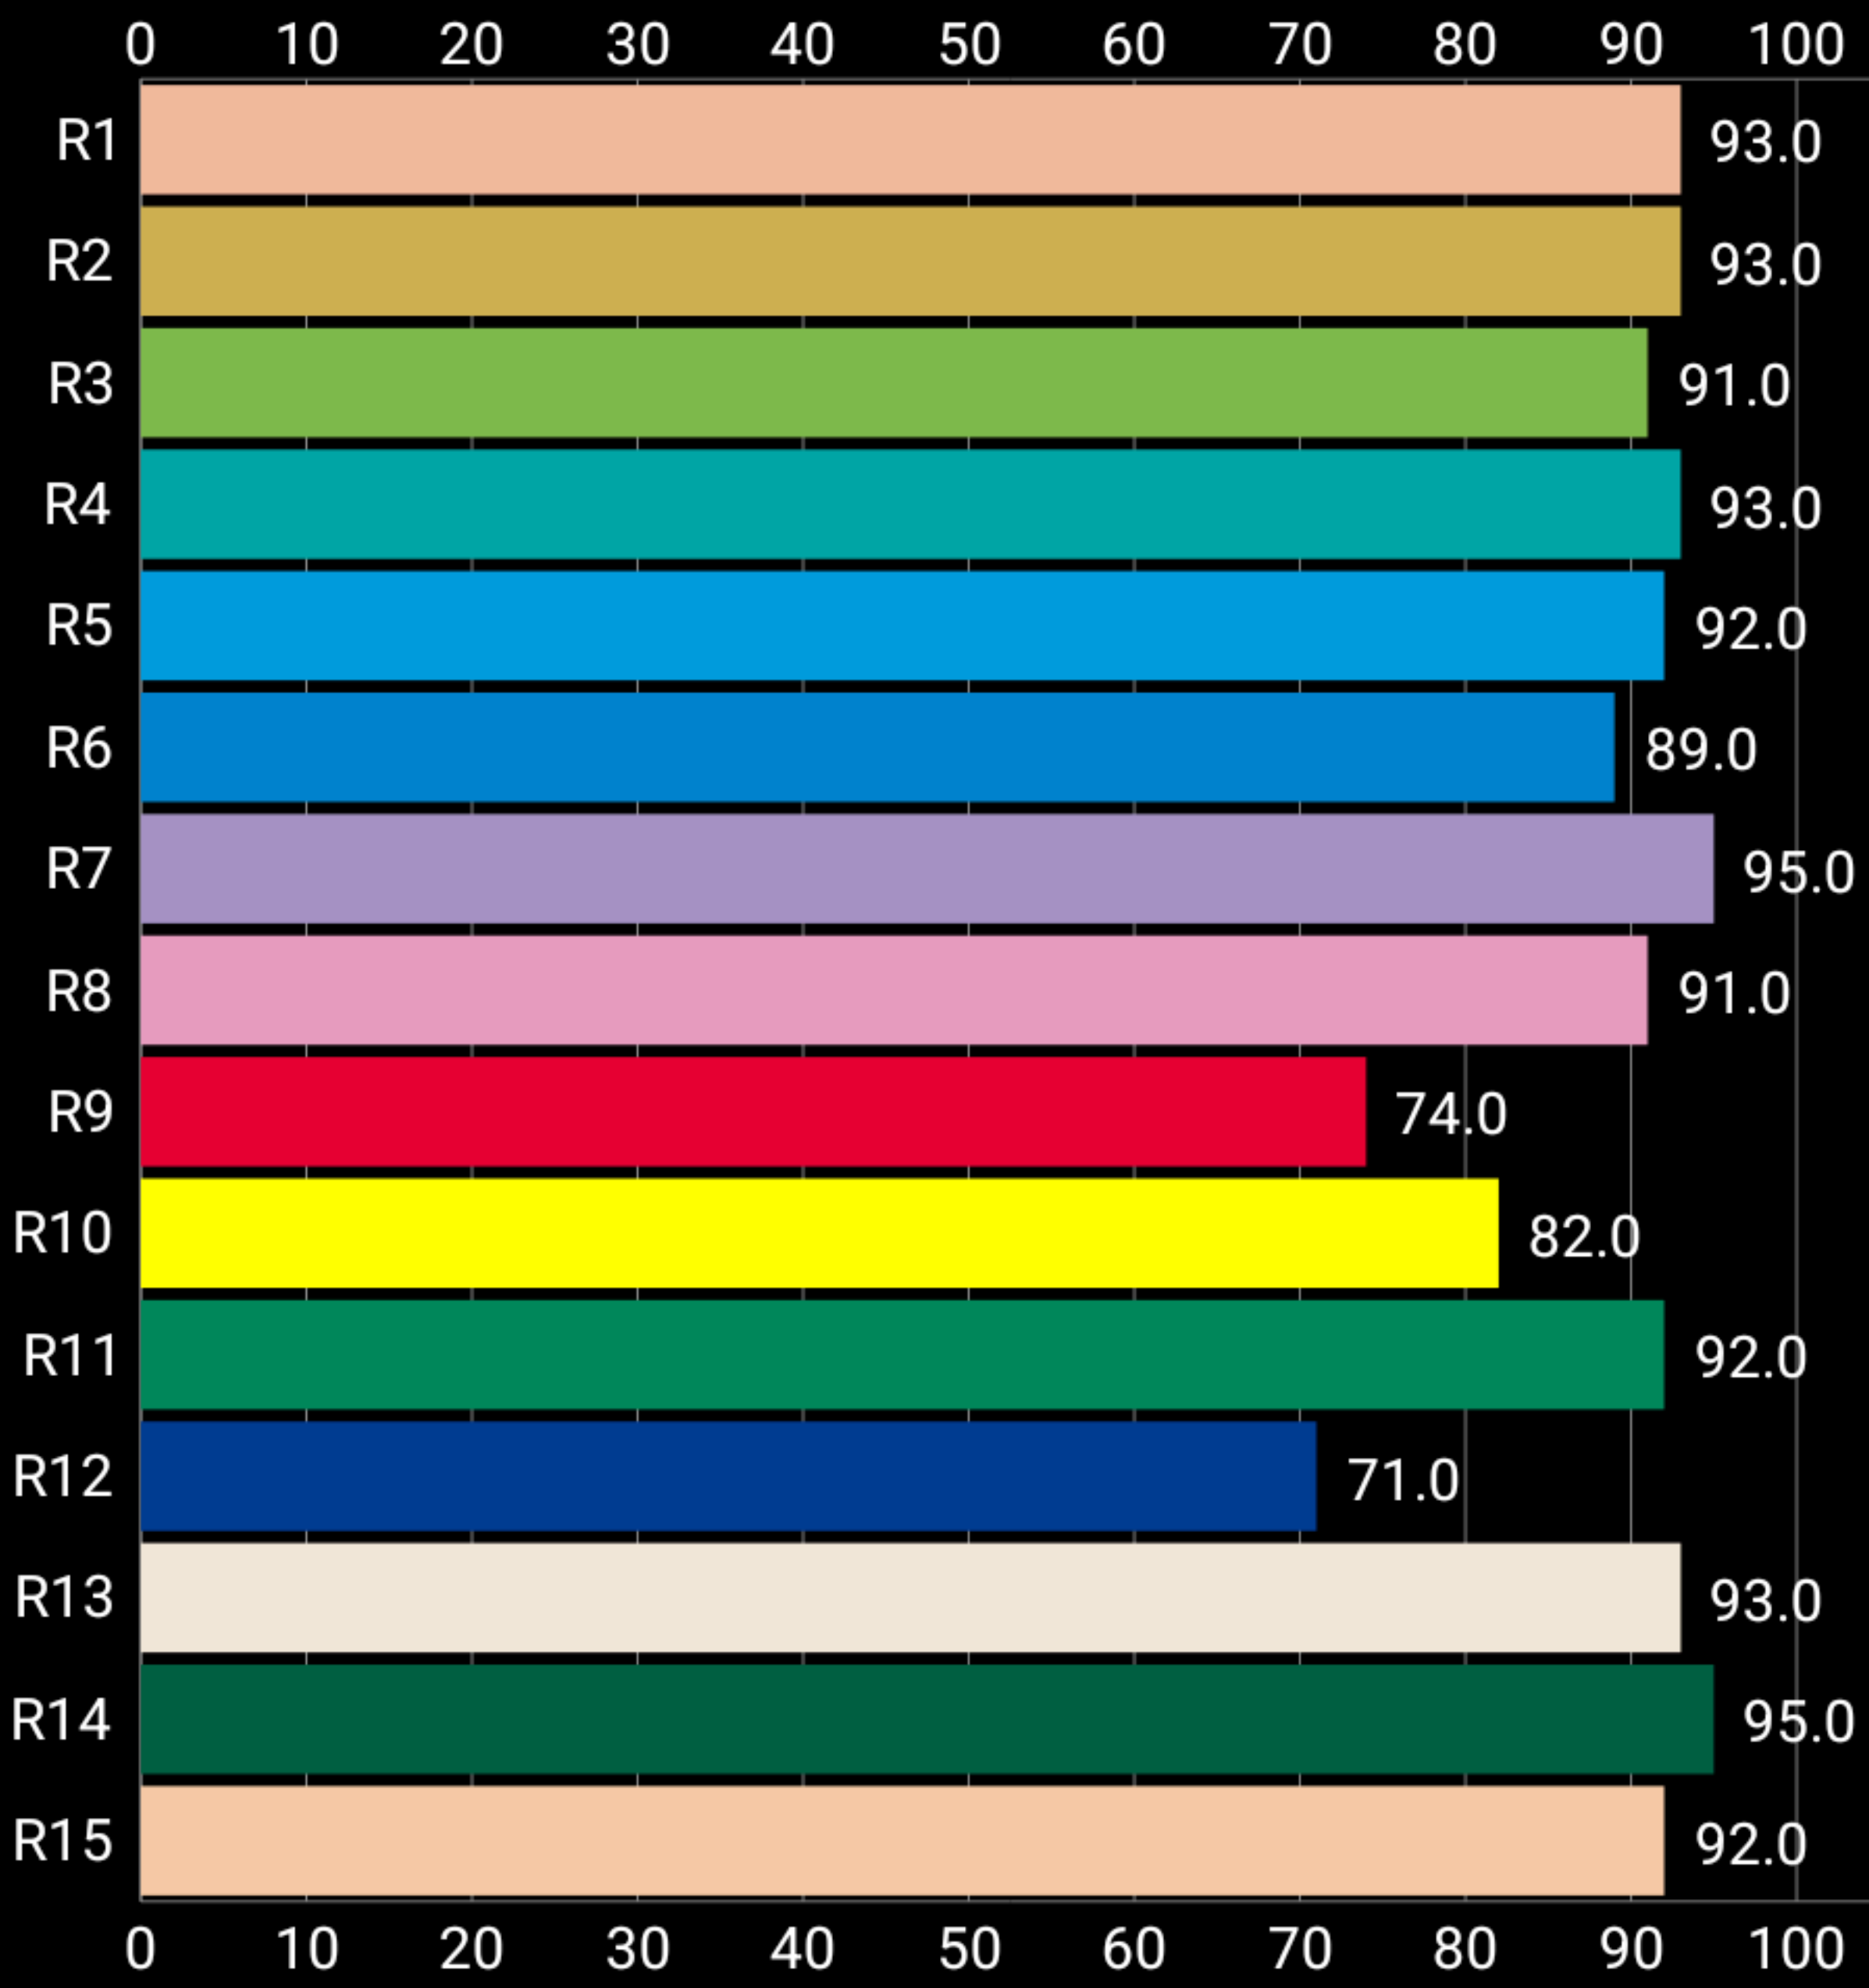


92.1
Ra

89.1
Re

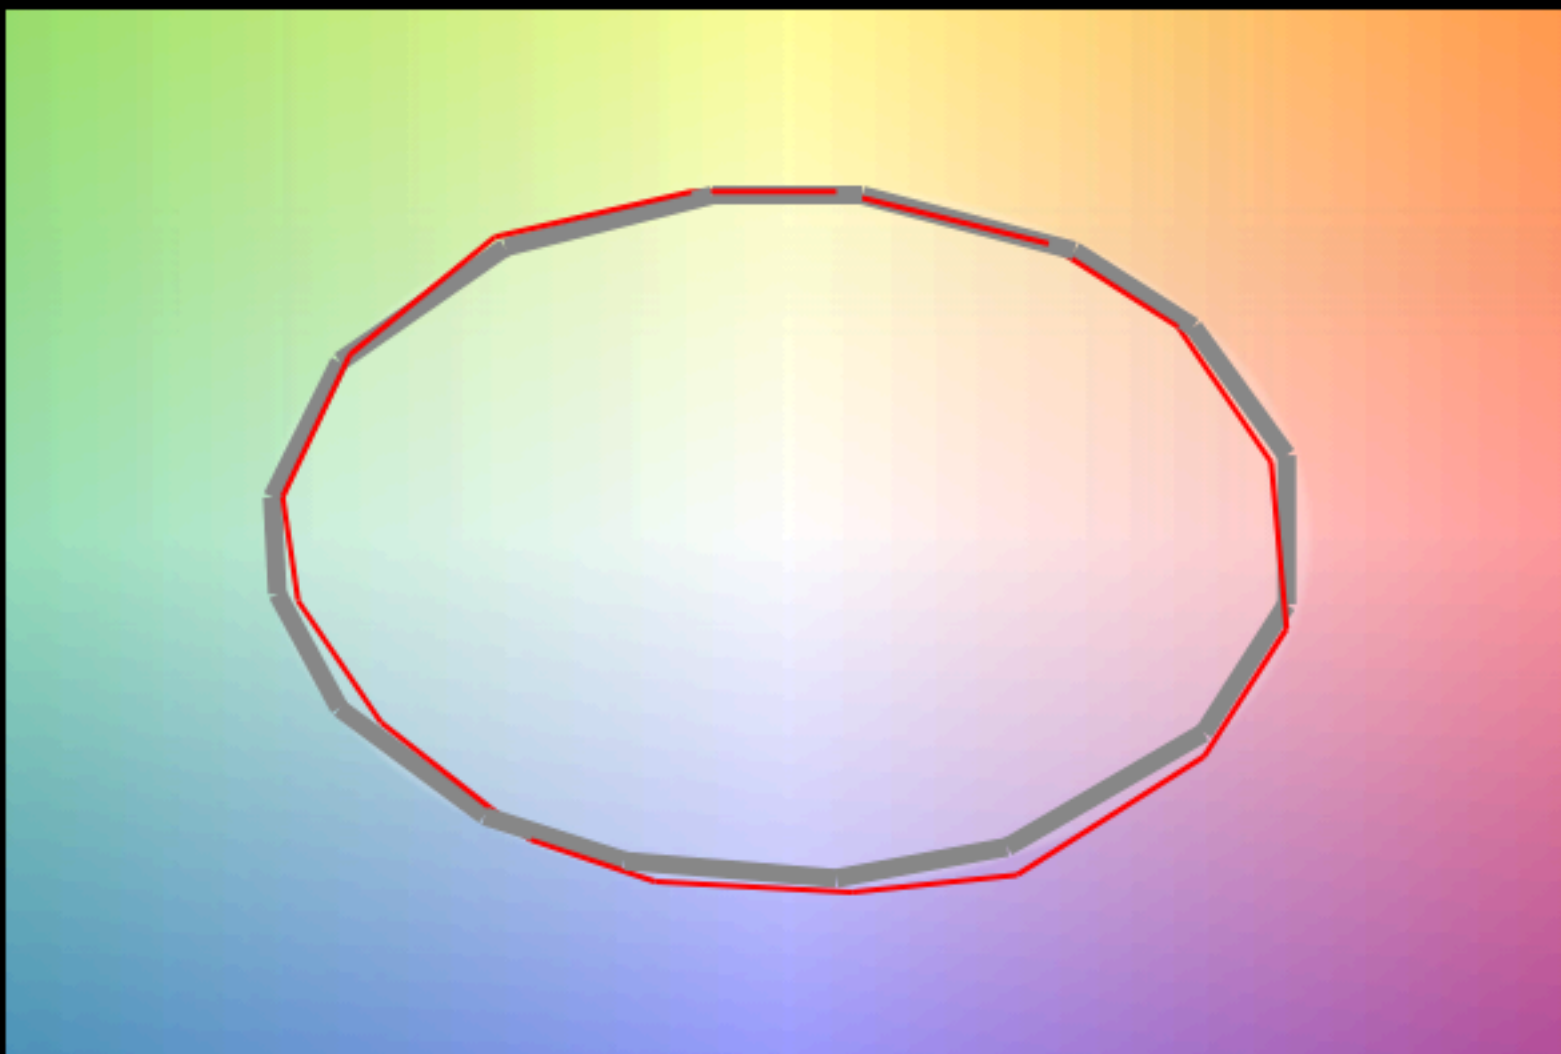


88.9
Rf

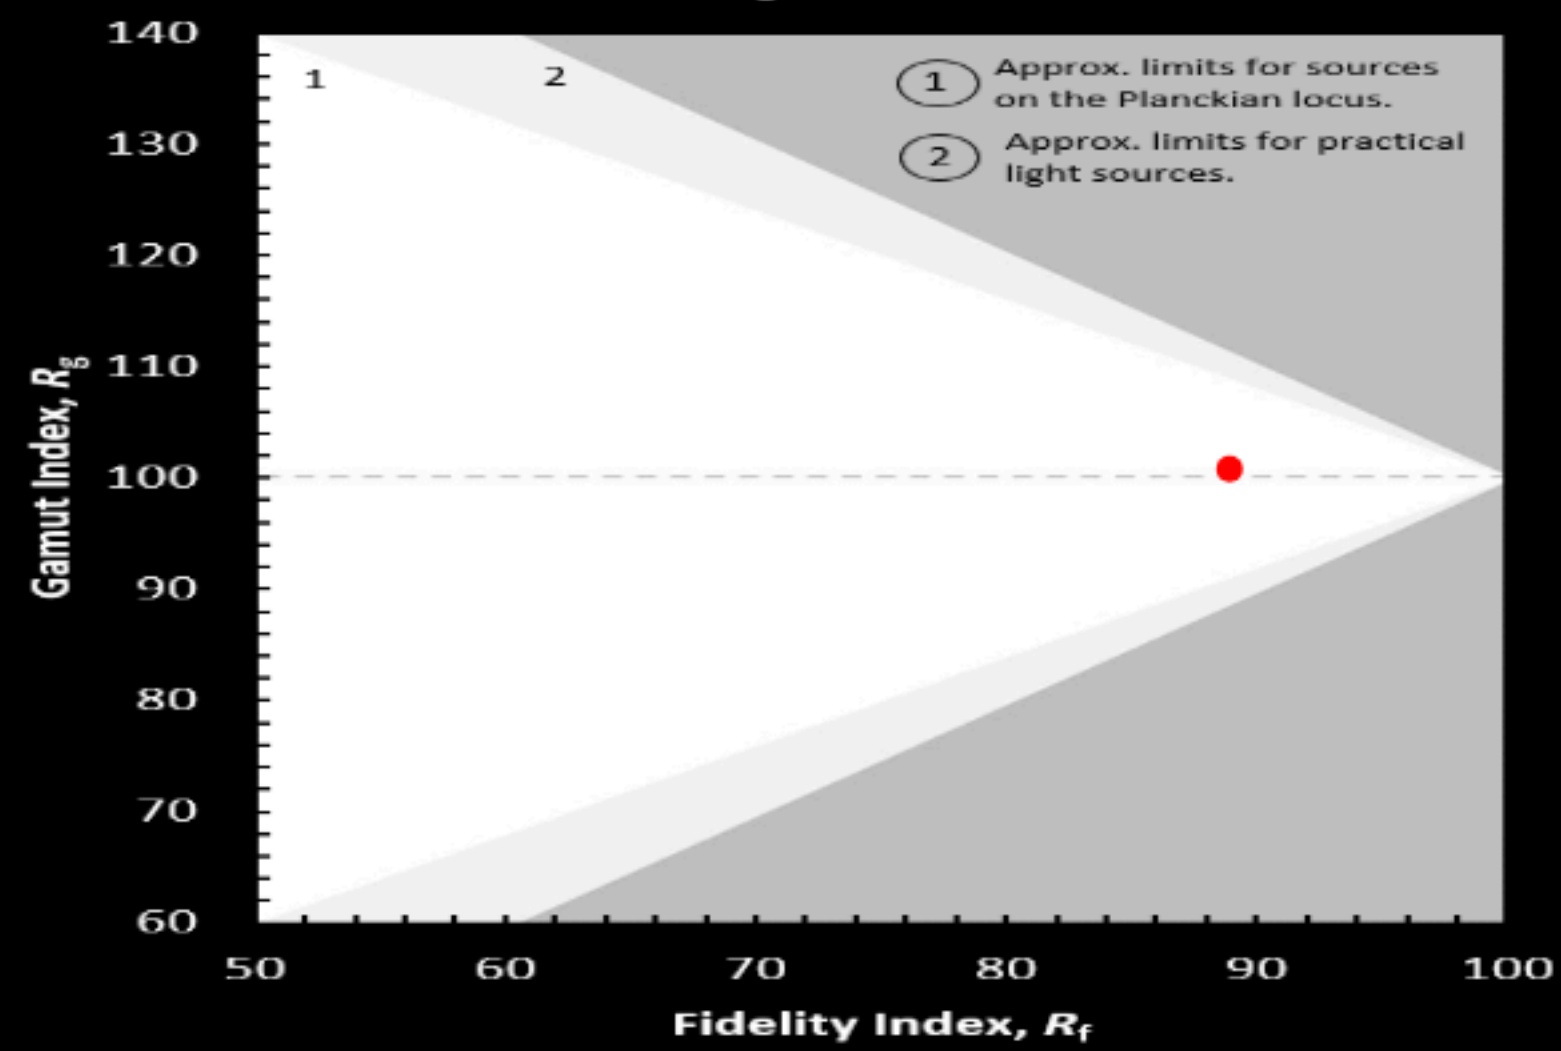


100.9
Rg

Time chart

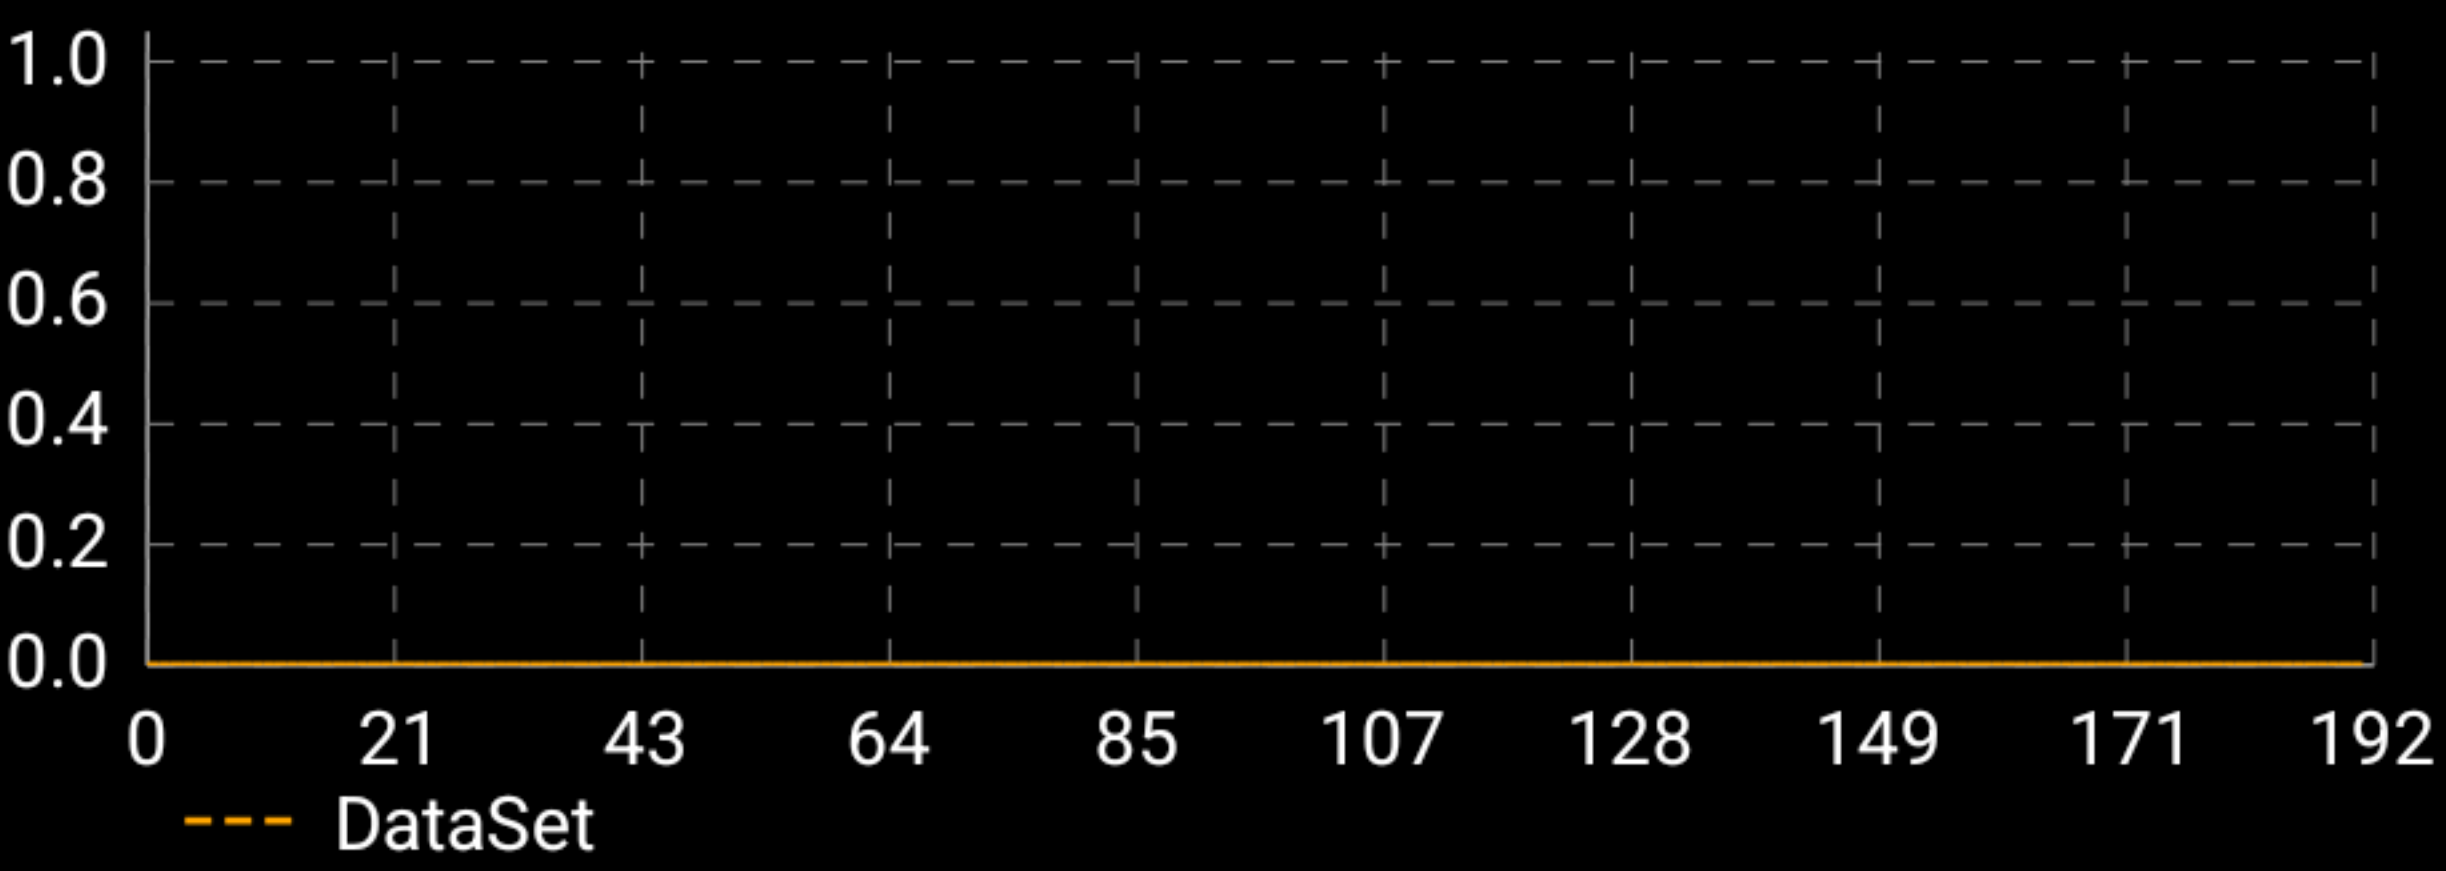

Freq. chart

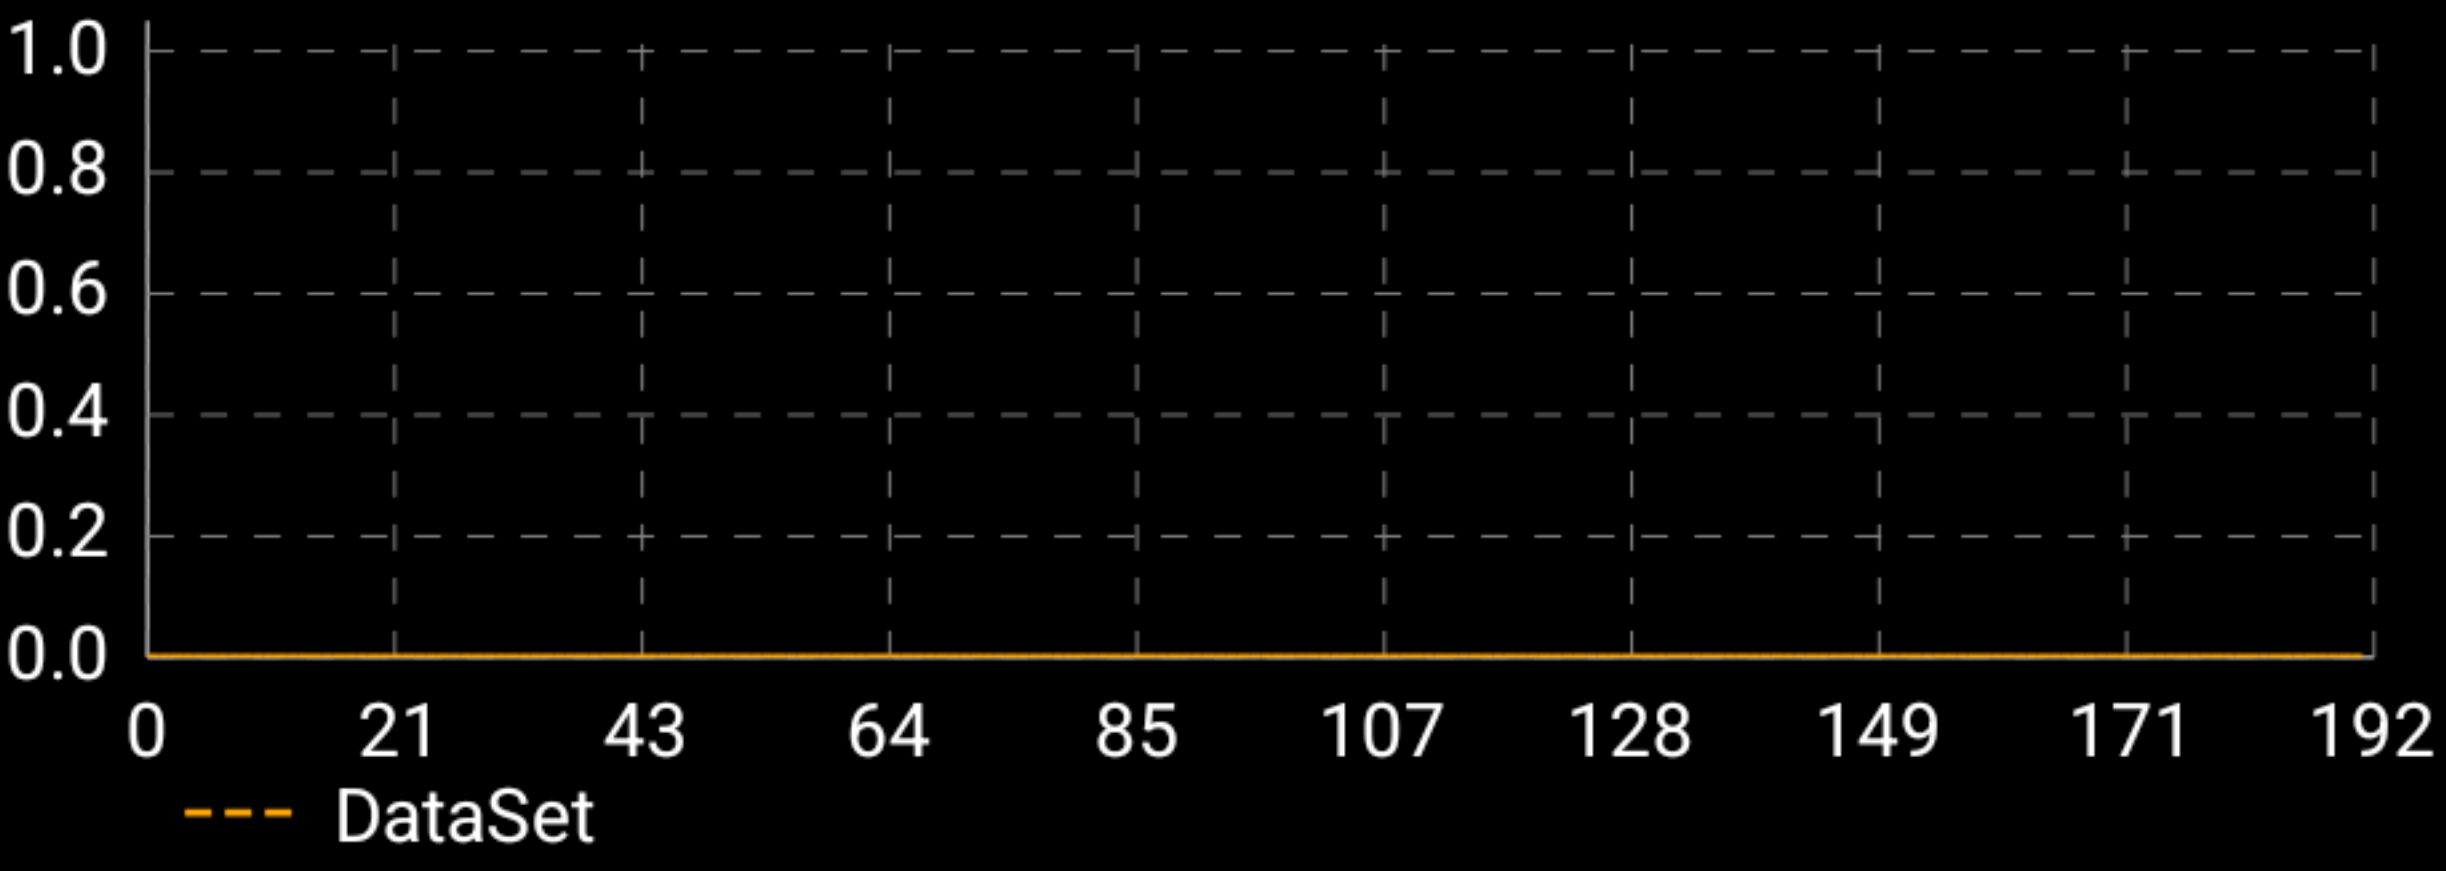

SVM	0.0
Percent flicker	0.0
Flicker index	0.0
Frequency	0.0