

In.Licht Ultra

FLEXION 65 PINSPOT 4000K TM 30 REPORT


Lighting Facts

Color Quality:


CCT	3908.3
Ra	93.8
Rf	89.5
Rg	100.0
Duv	2.0E-4
SDCM	3.14

HCL index:


Illuminance	96.1
EML	68.17
M-EDI	61.81
S/P ratio	1.74
CAF	0.58
RG Risk	RG1
CS	0.12
SVM	0.0
Percent Flicker	0.0
Flicker Index	0.0
Frequency	0.0

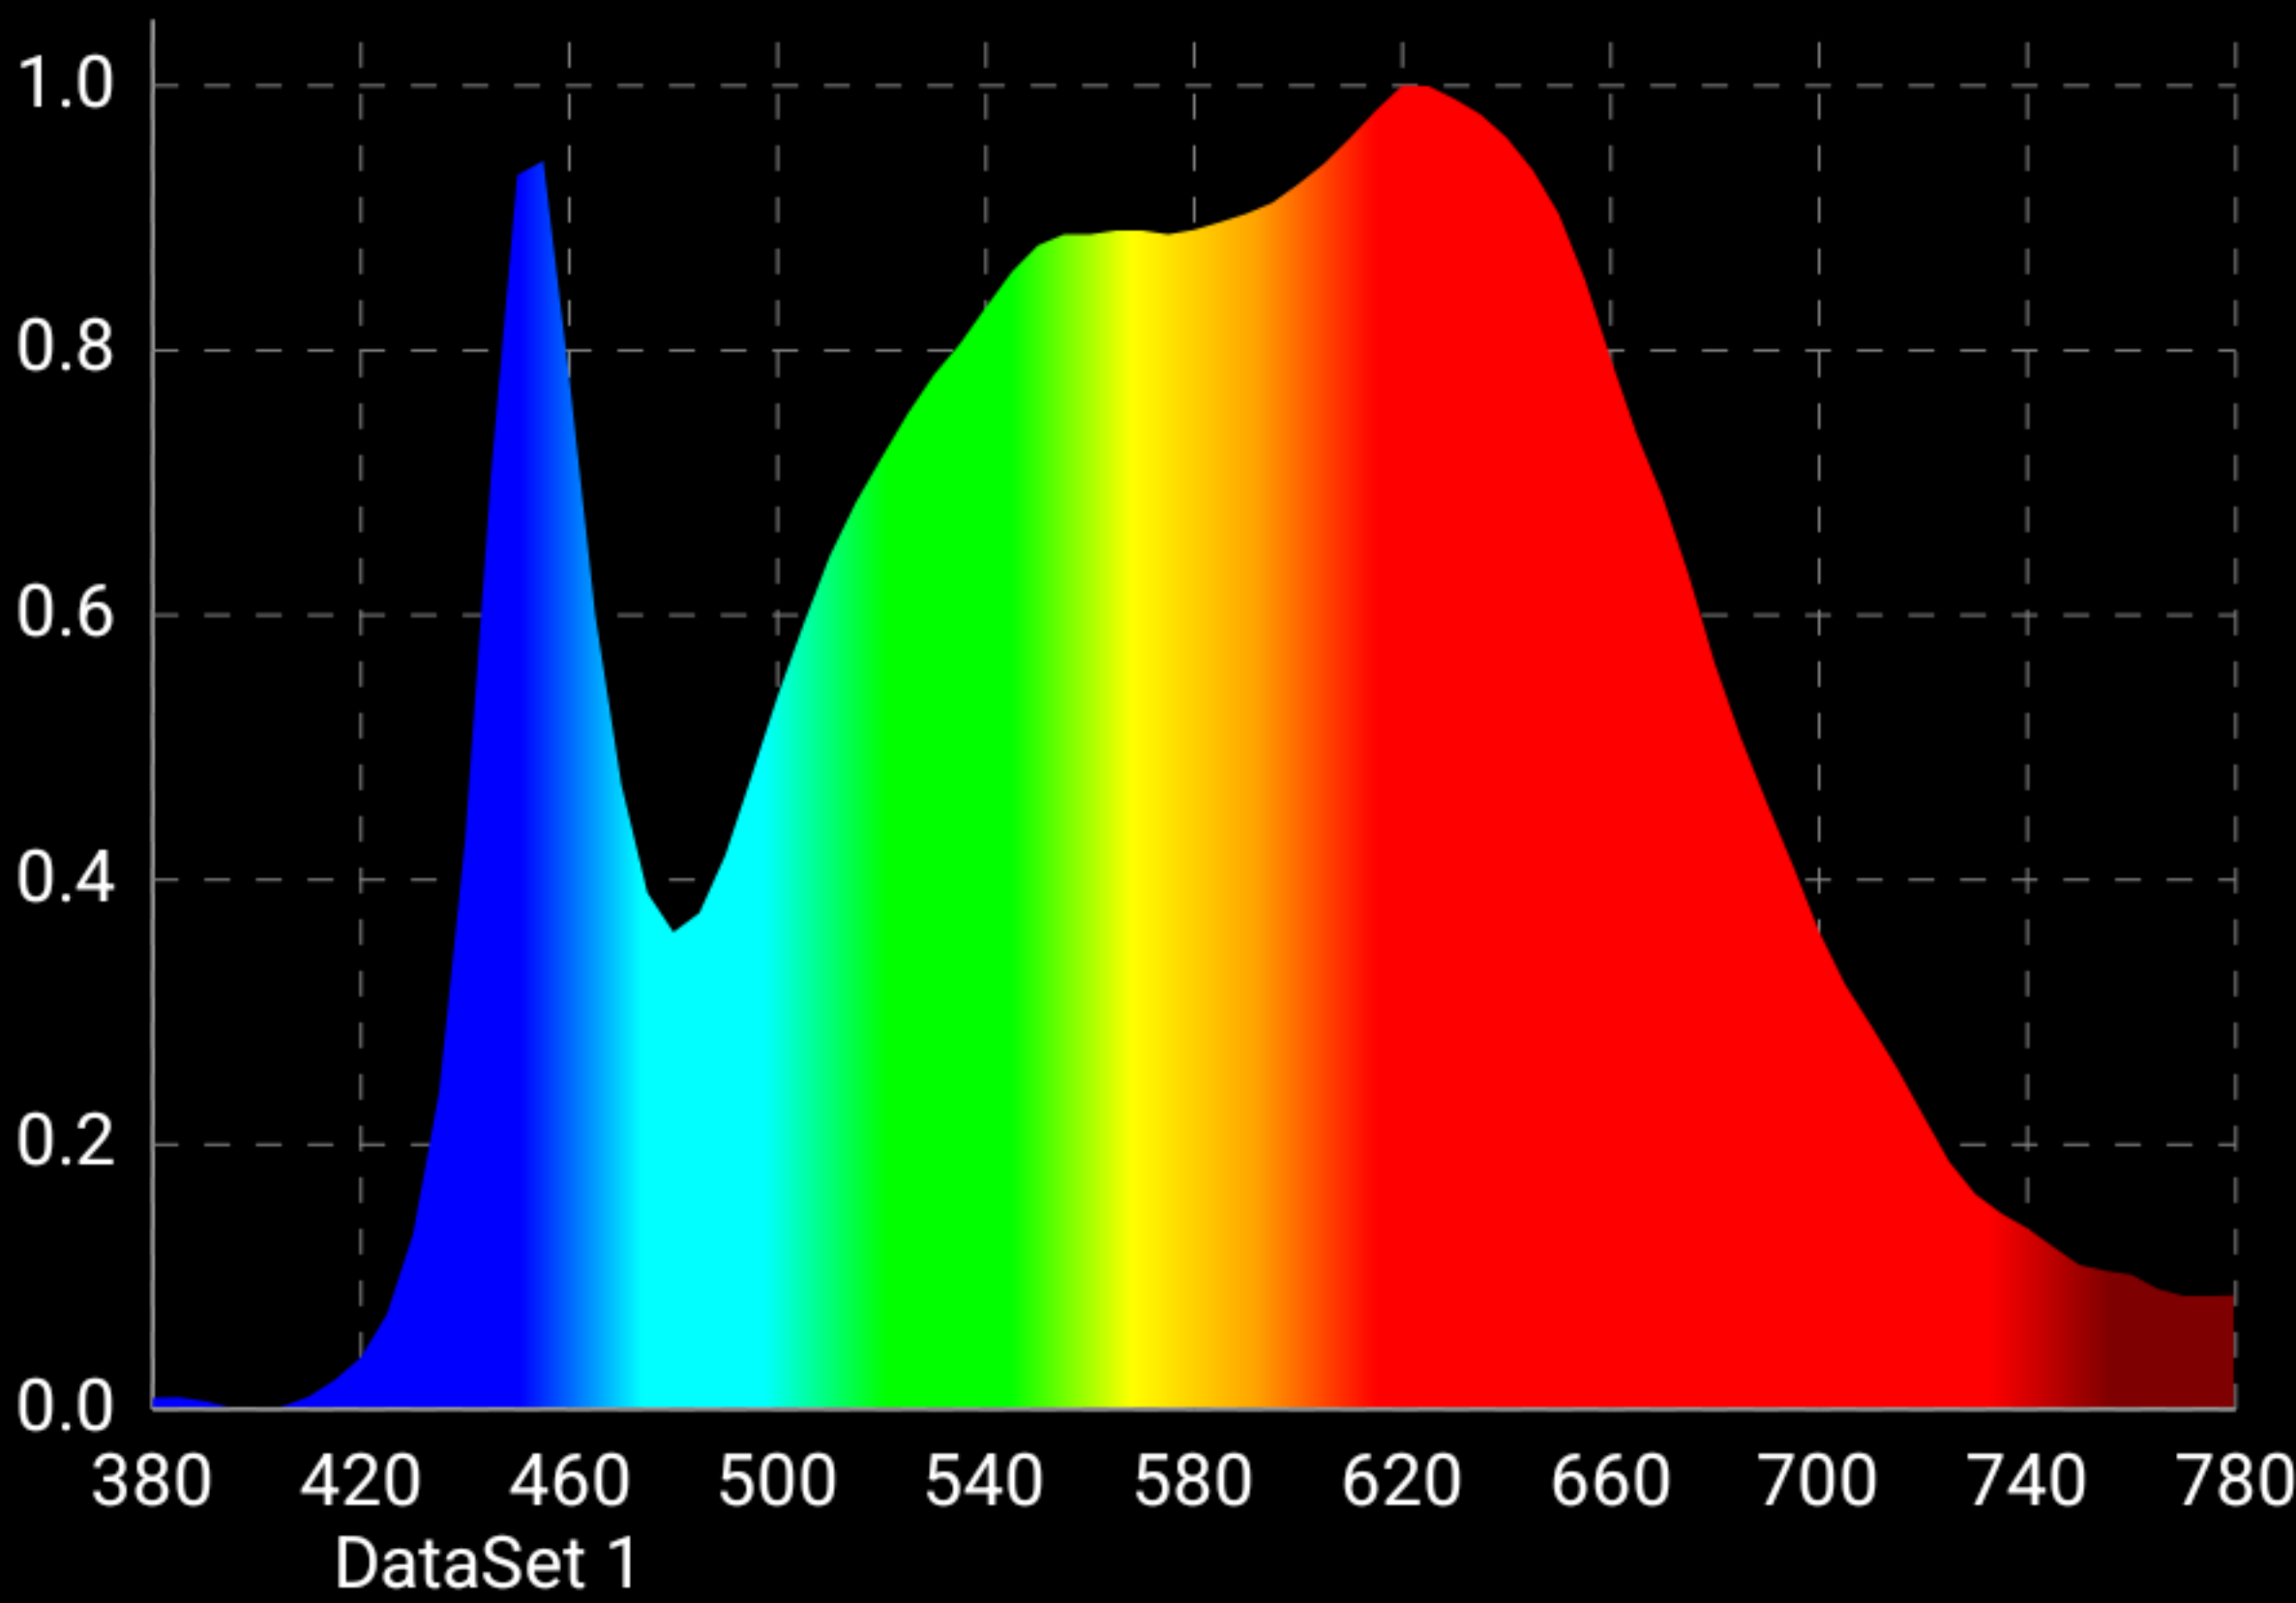

λ_d	582
λ_p	620
λ_{pV}	1.58

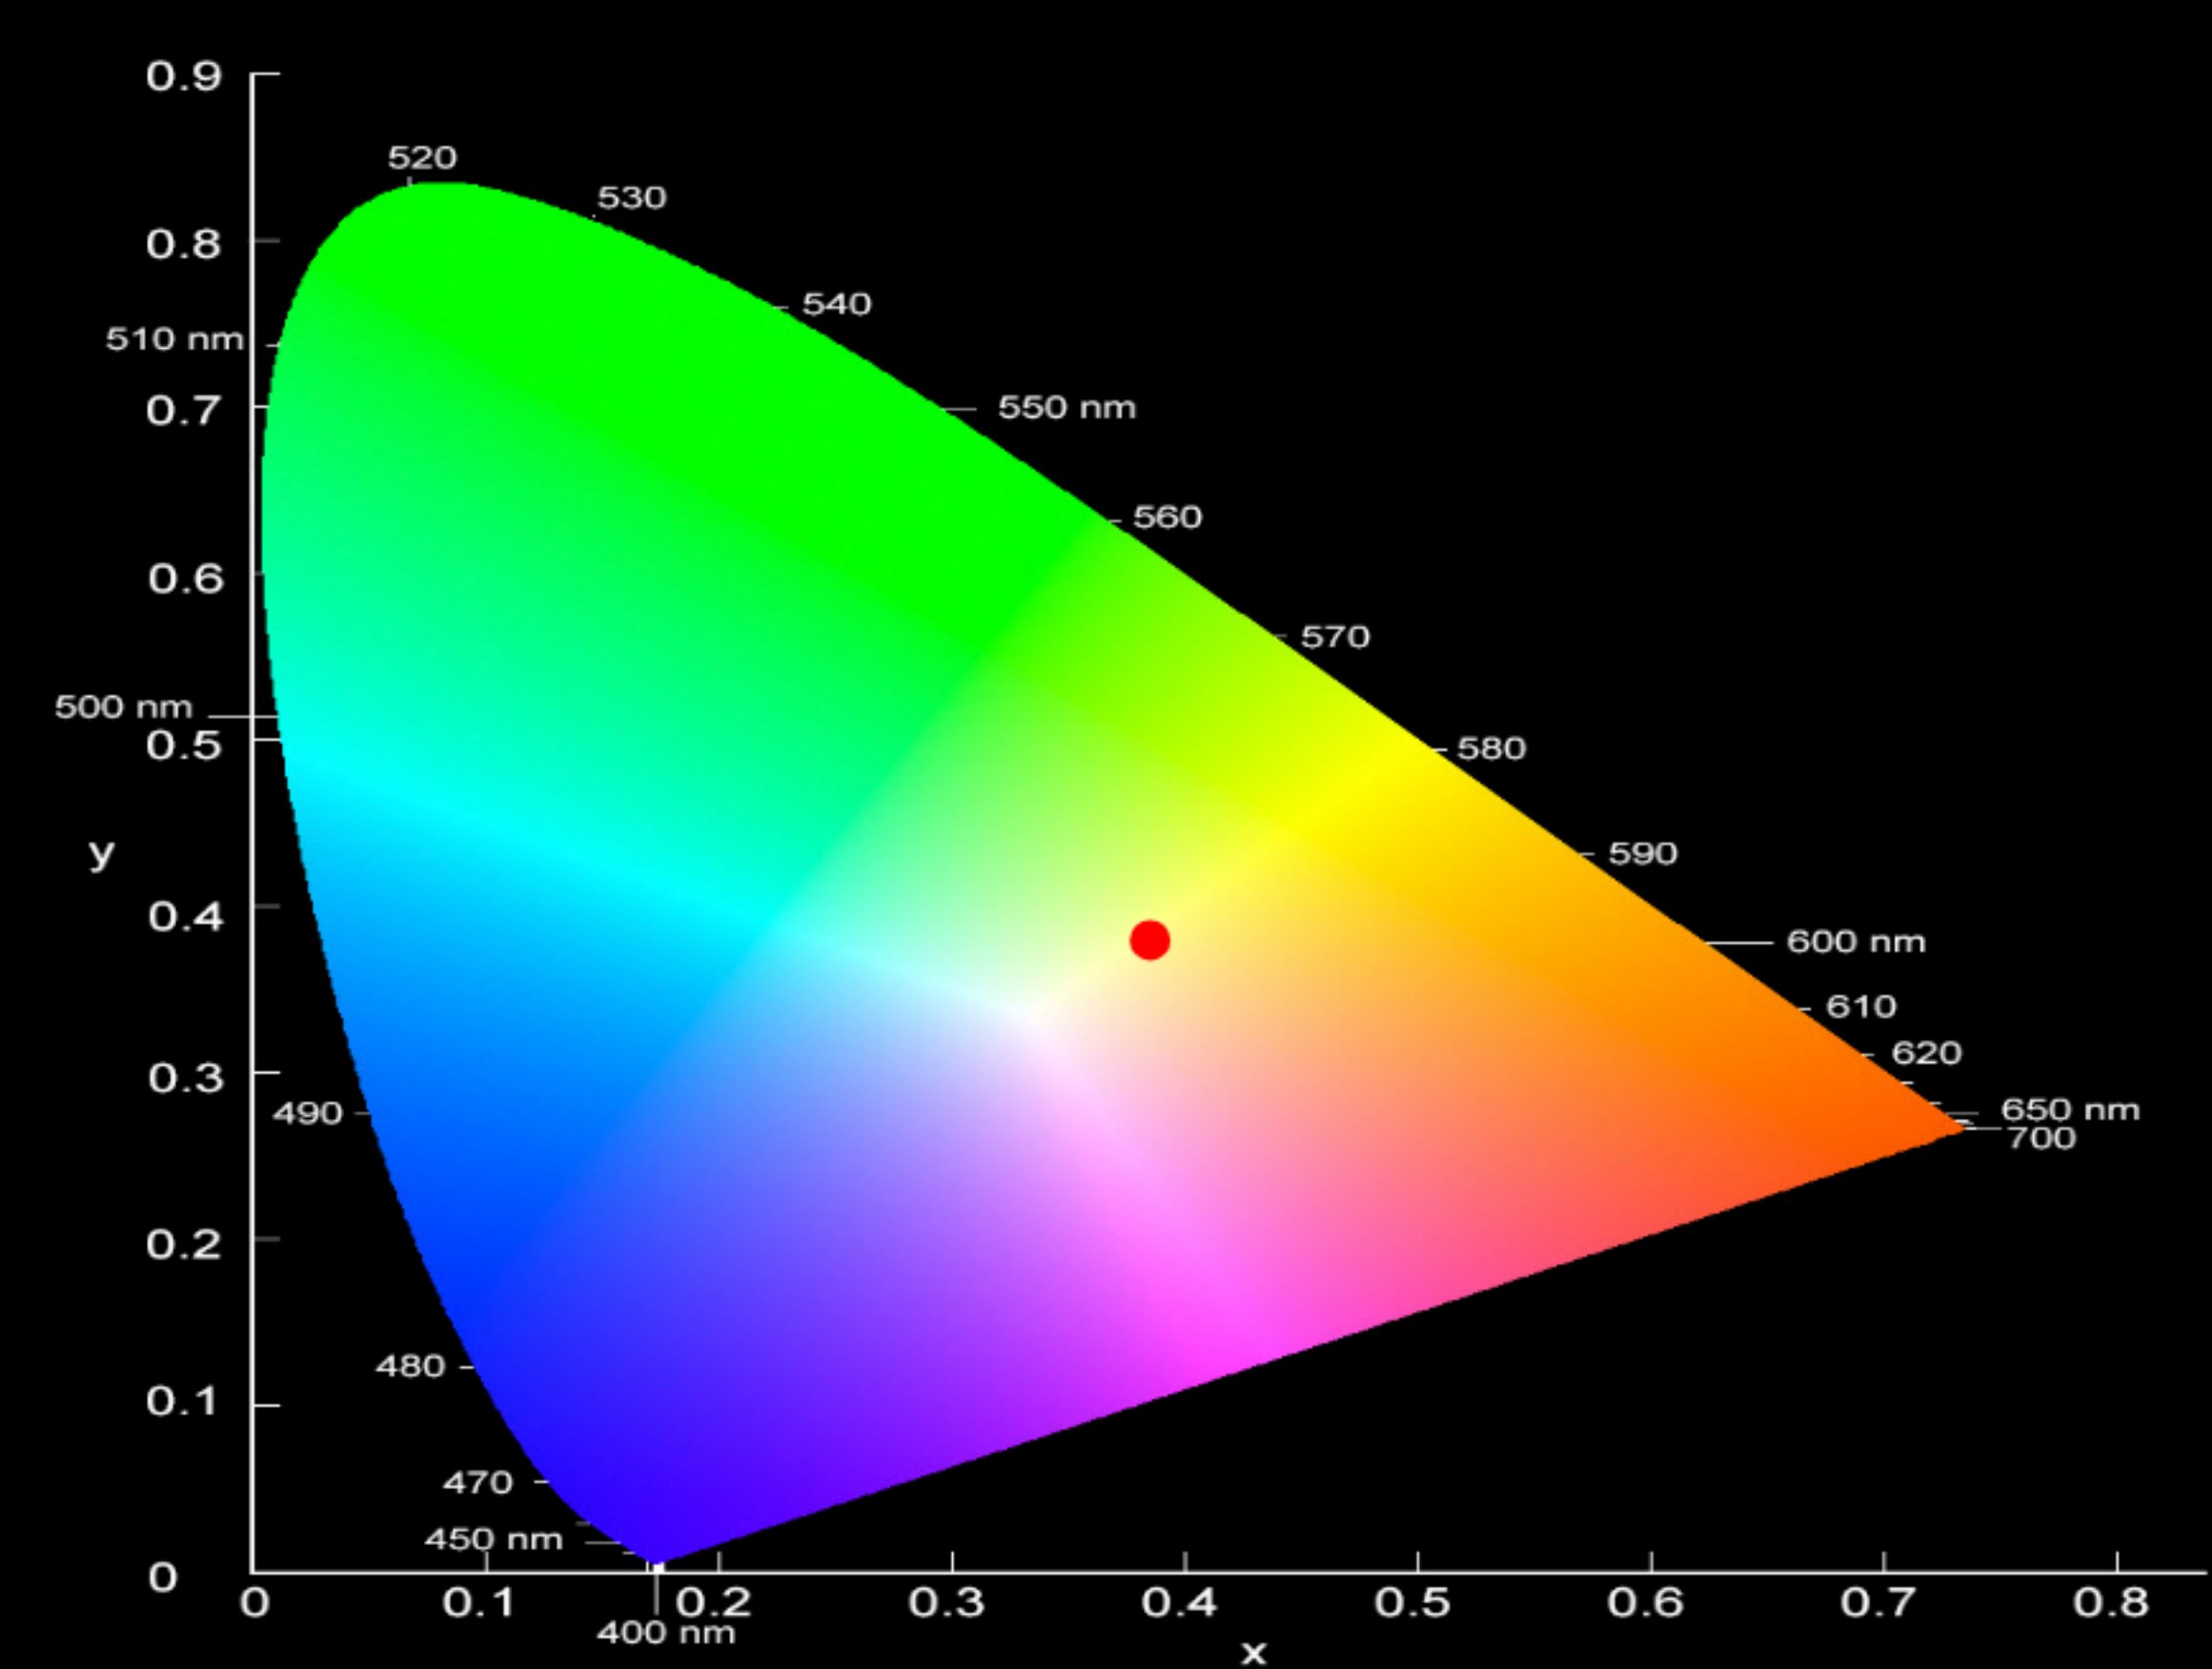


(x,y)	(0.385,0.38)
CCT	3908.3
Duv	2.0E-4

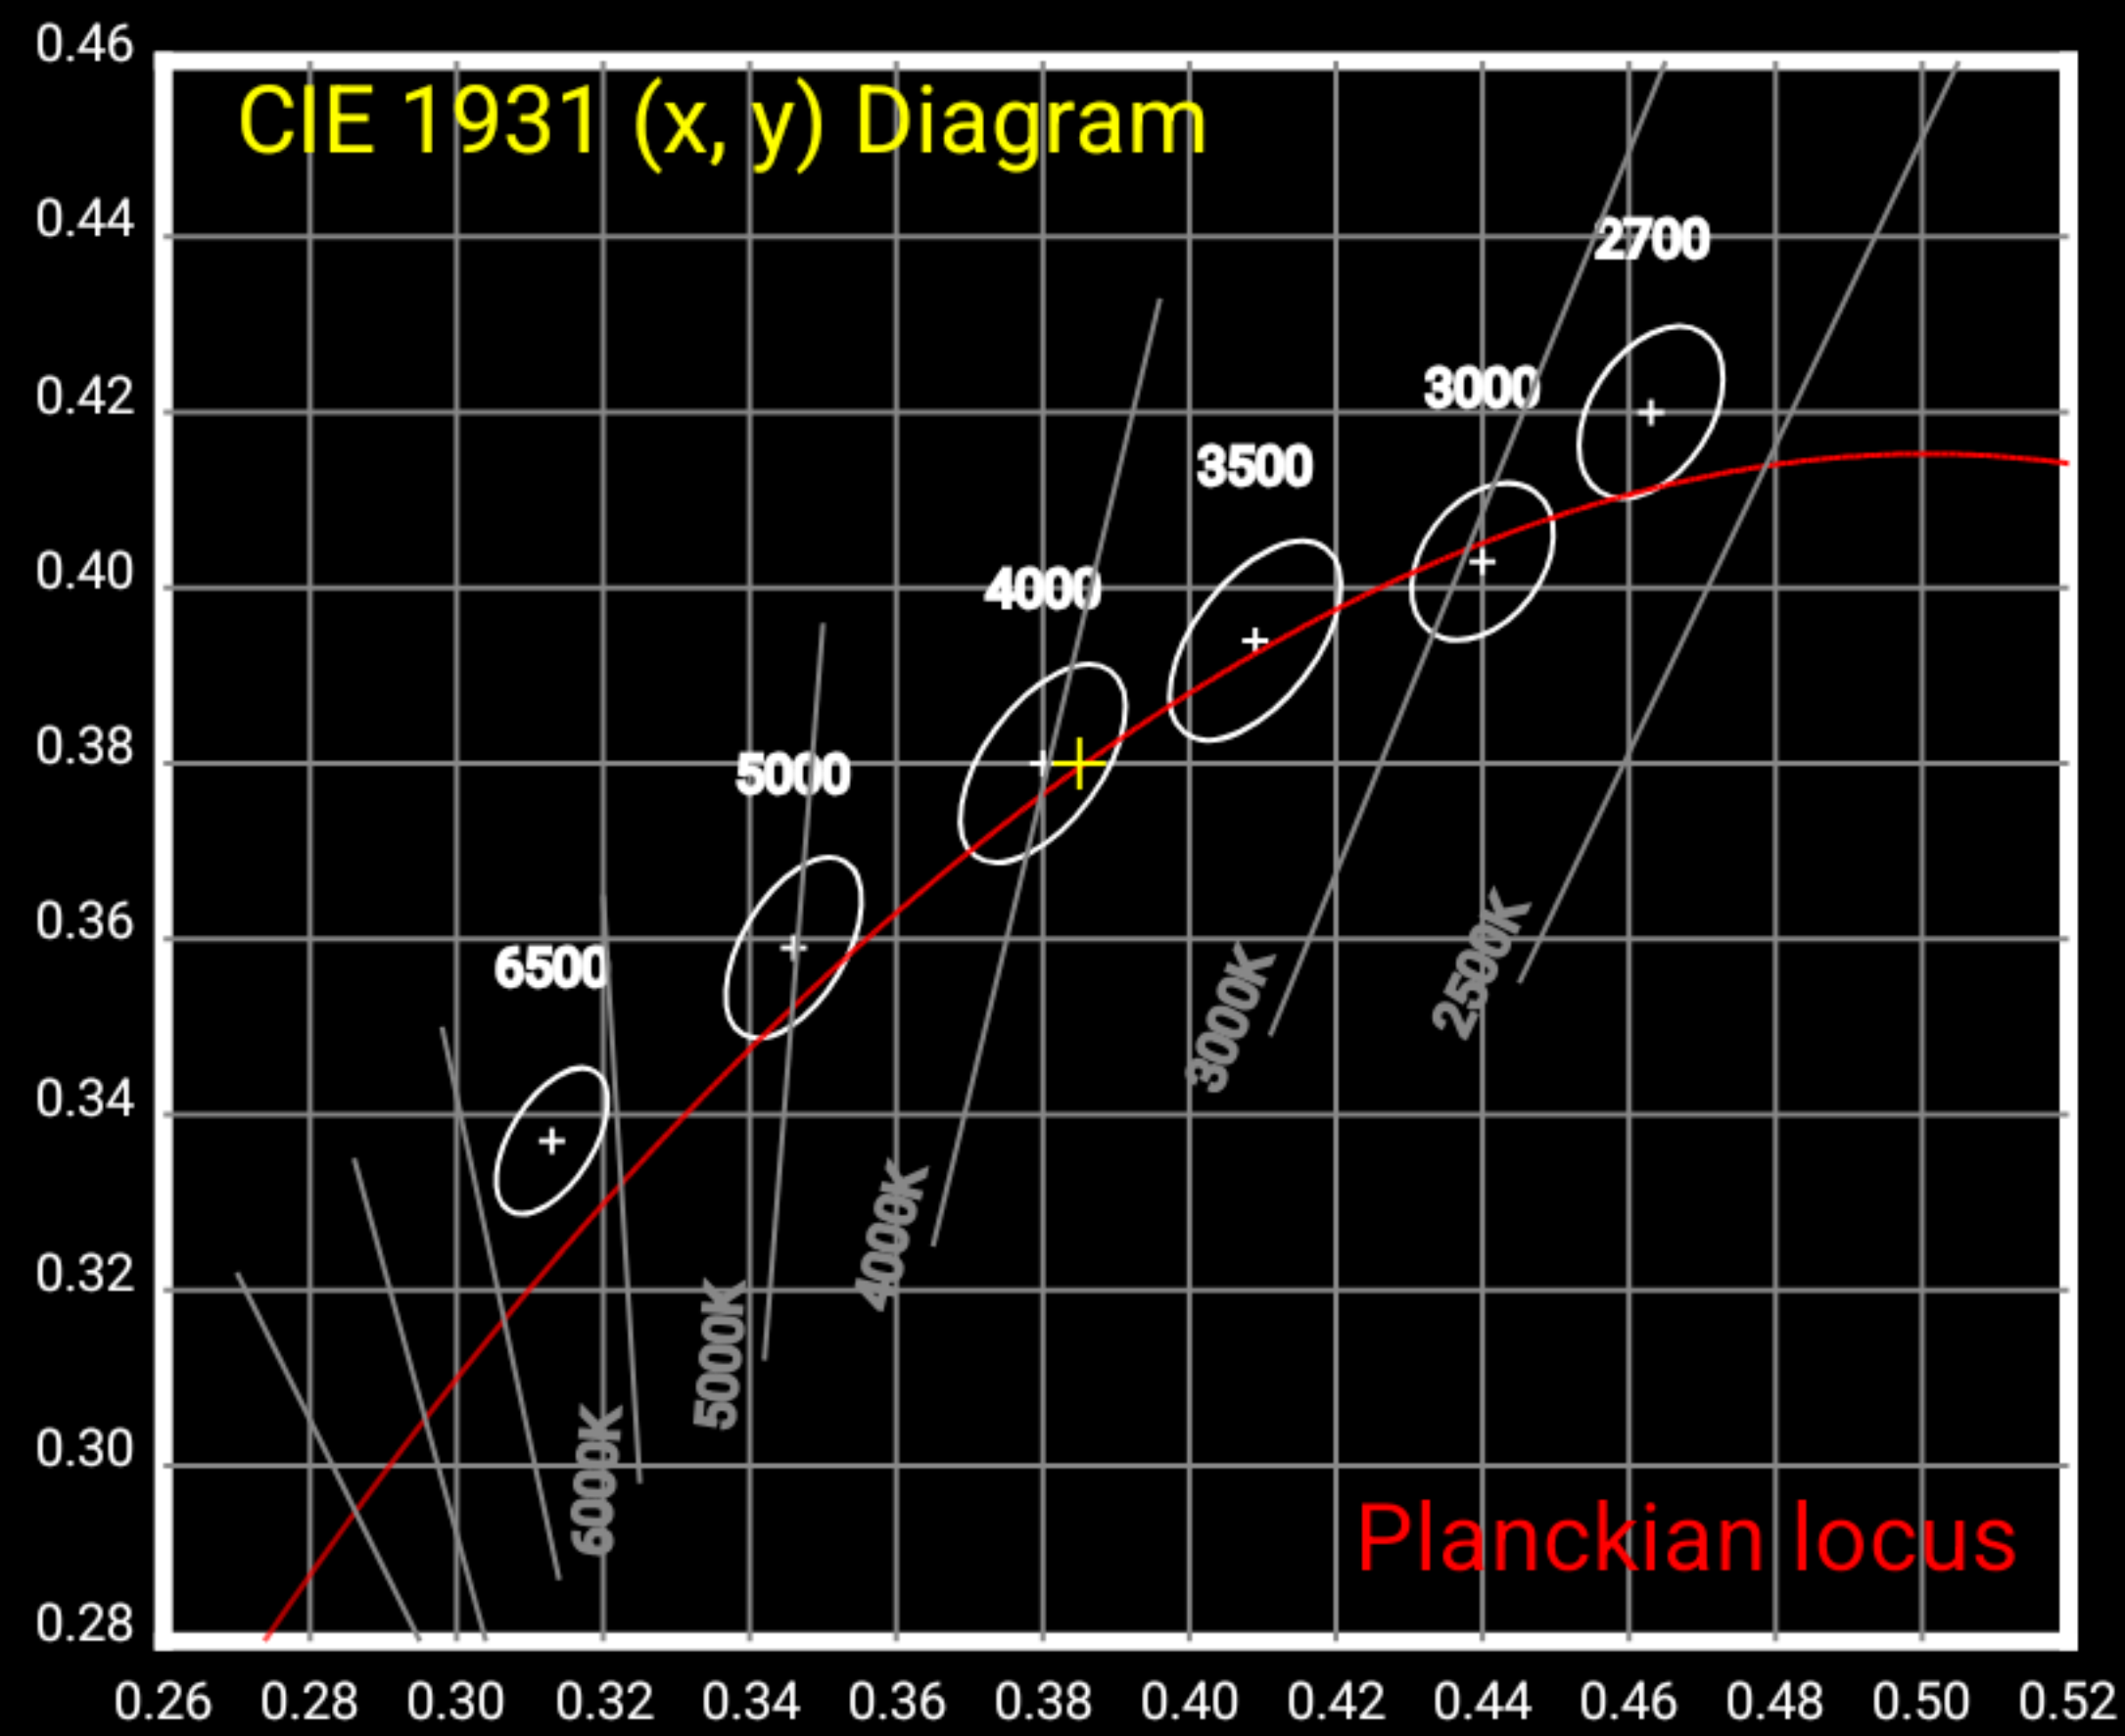


3.14
SDCM

x 0.385
y 0.38

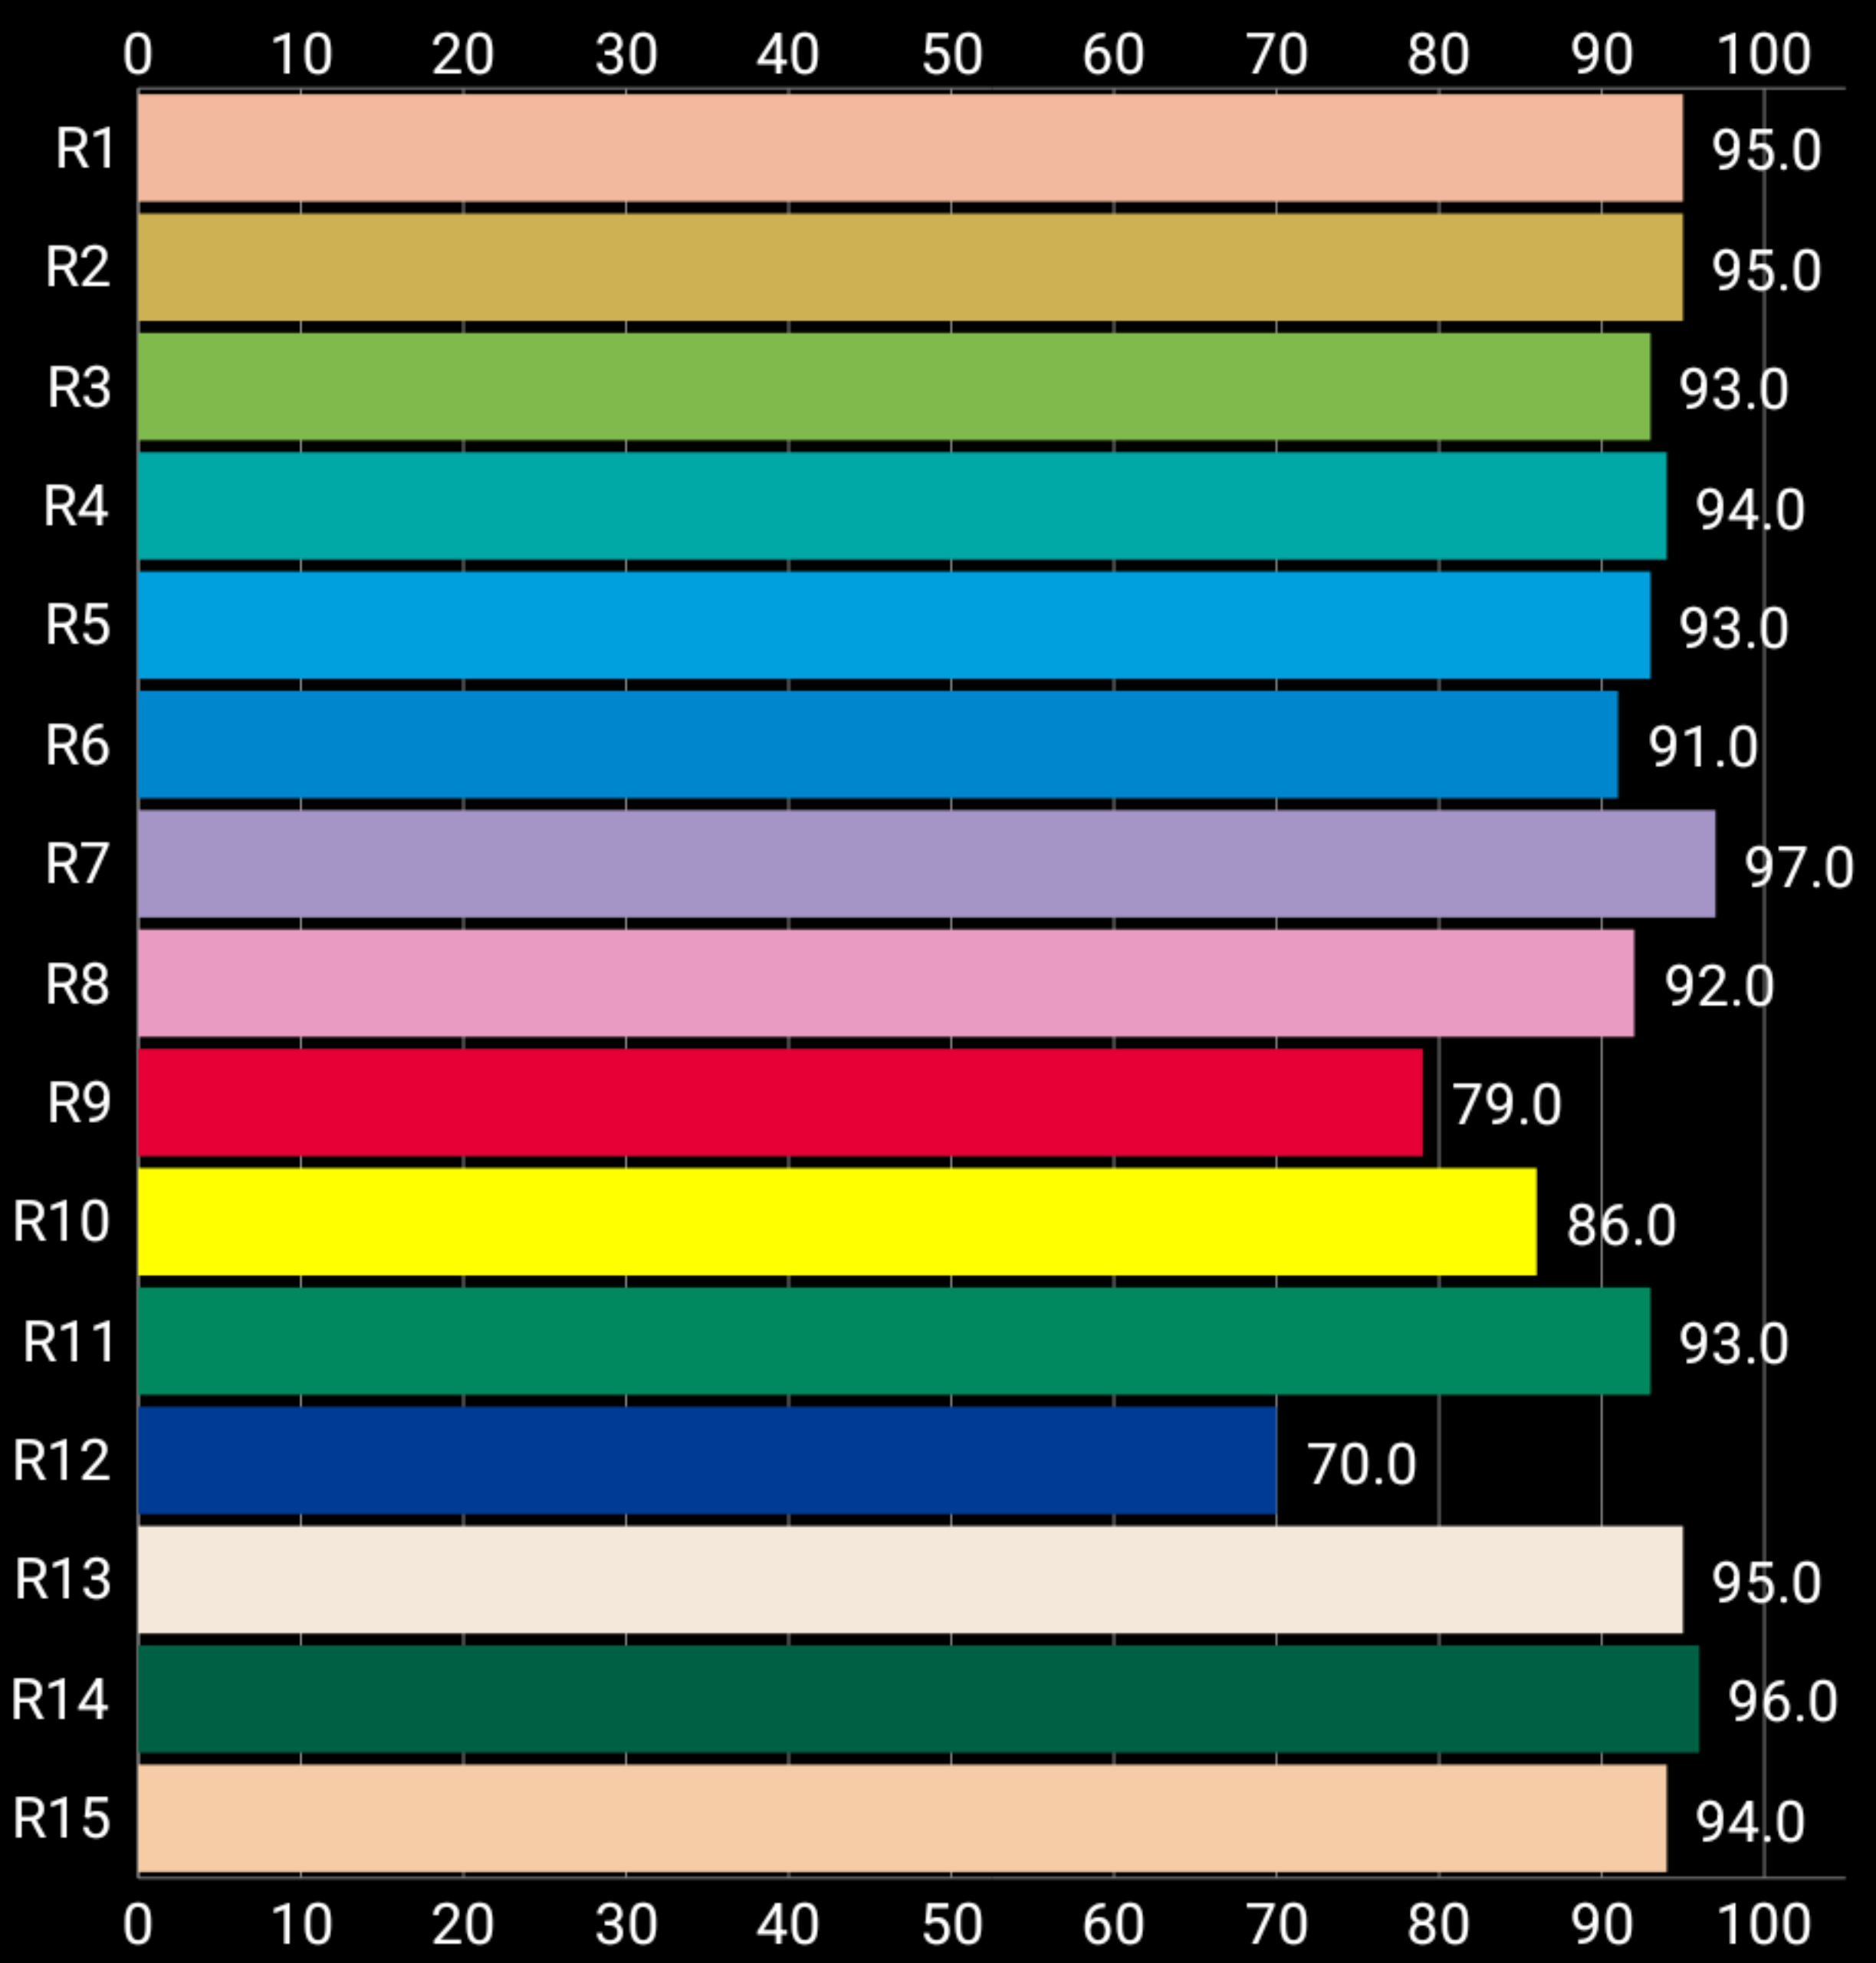


93.8
Ra

90.9
Re

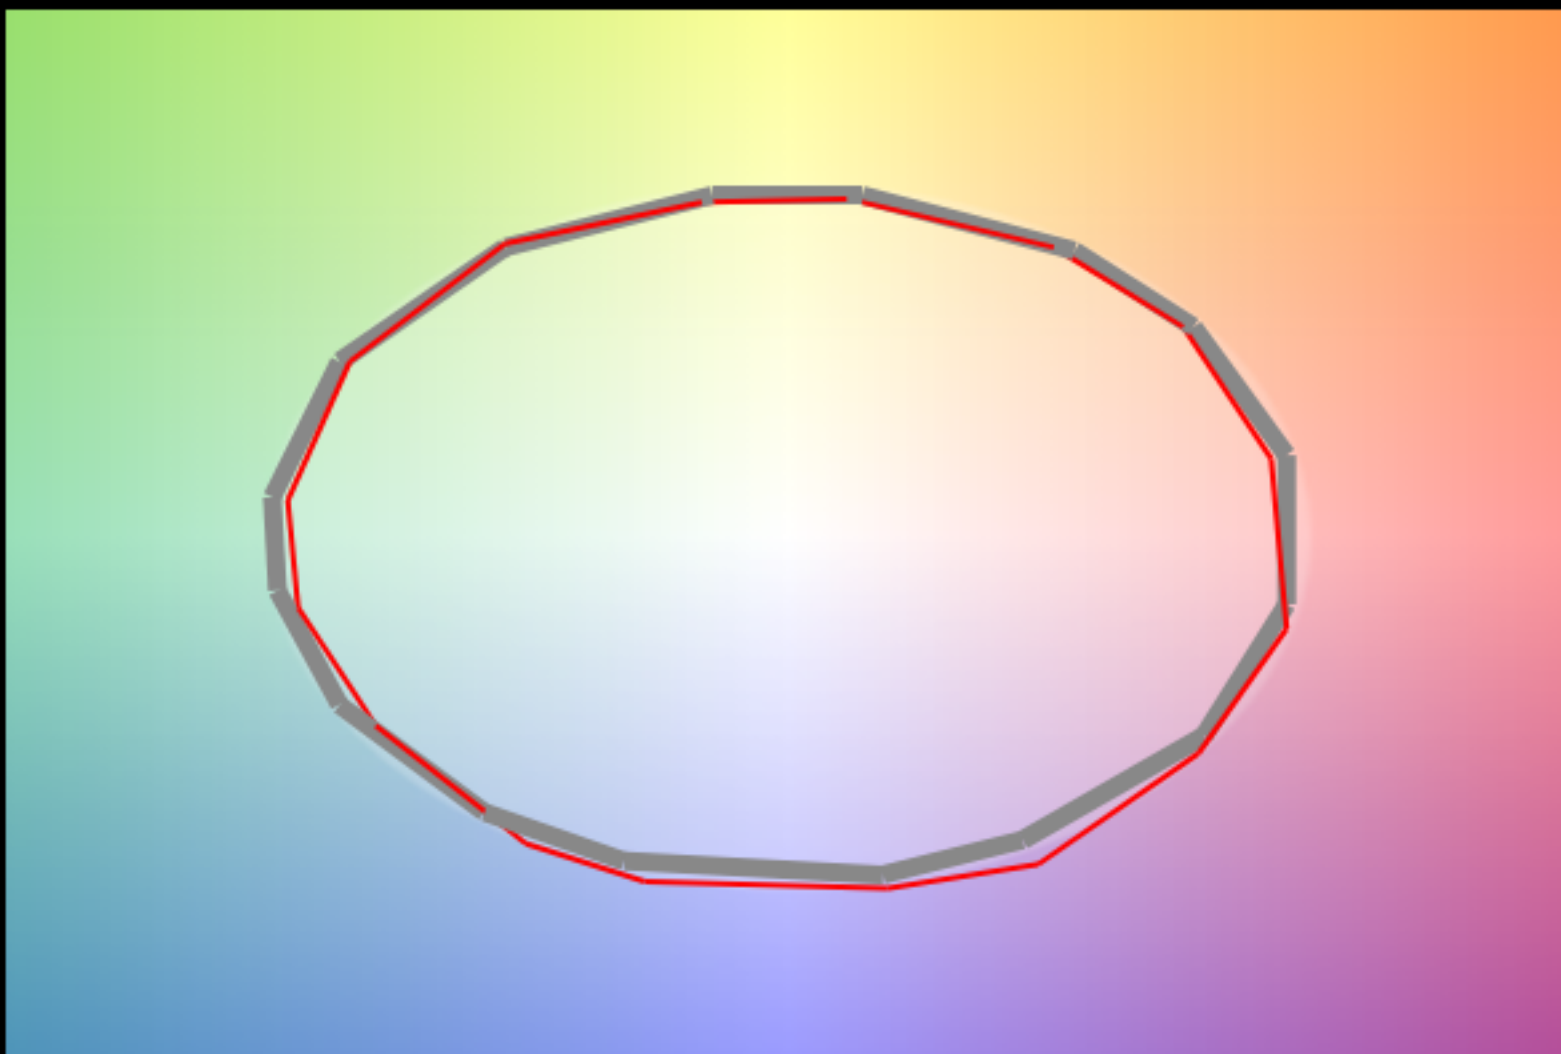


89.5
Rf

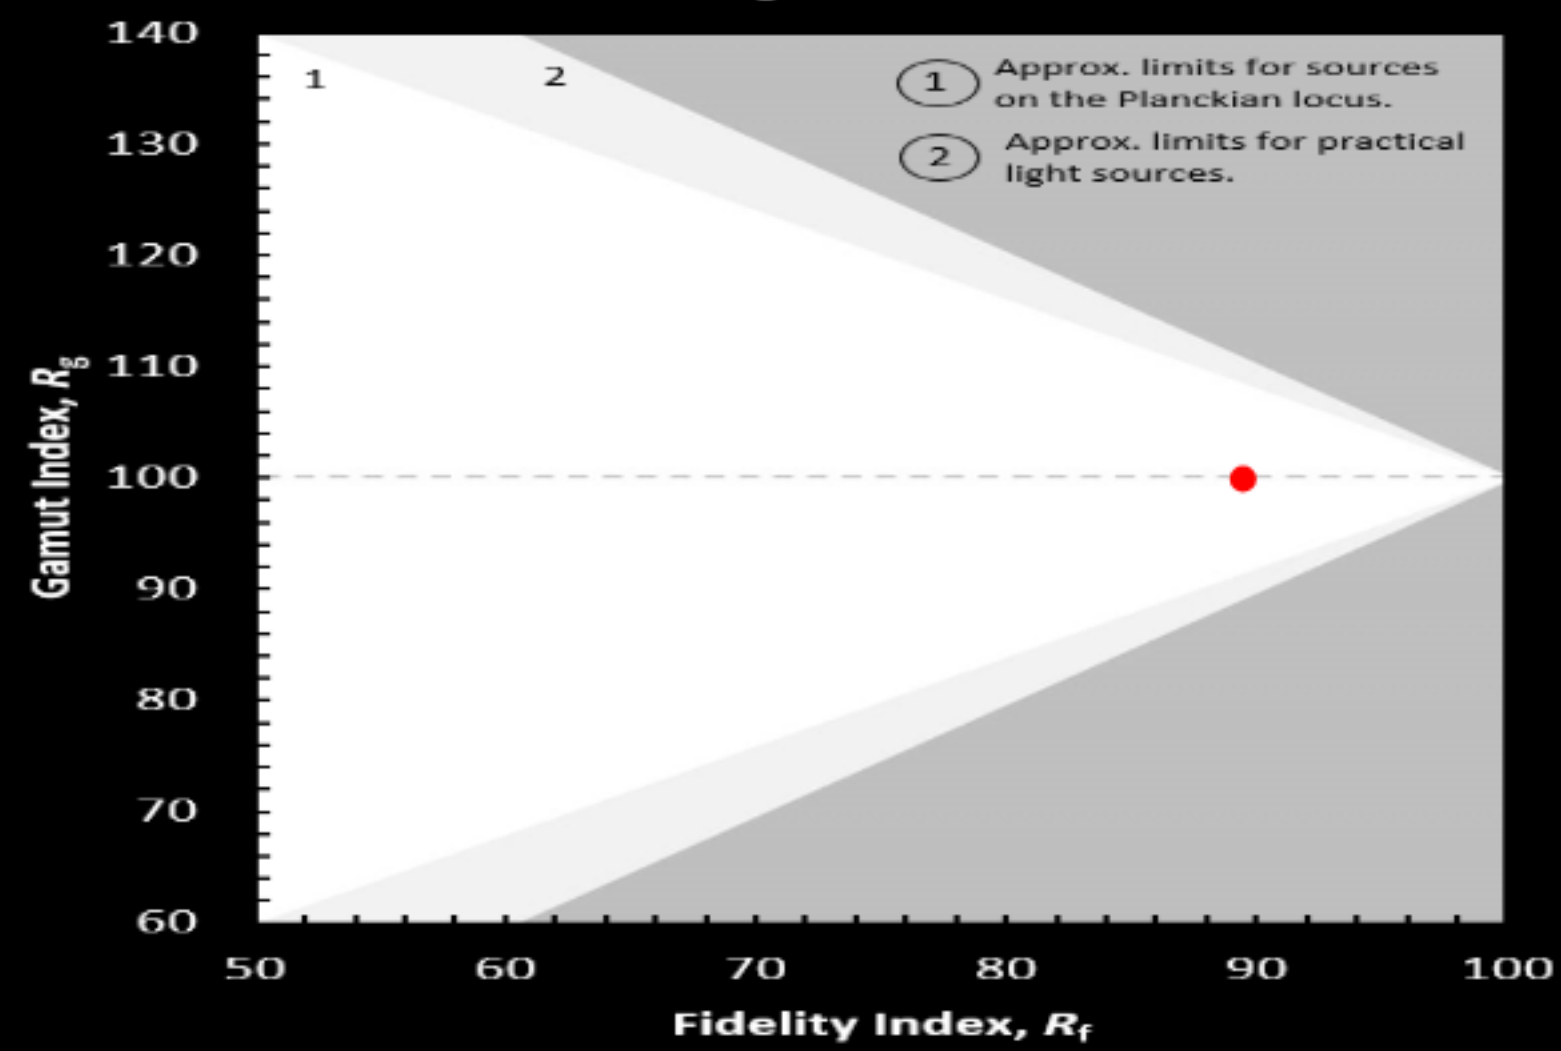


100.0
Rg

Time chart

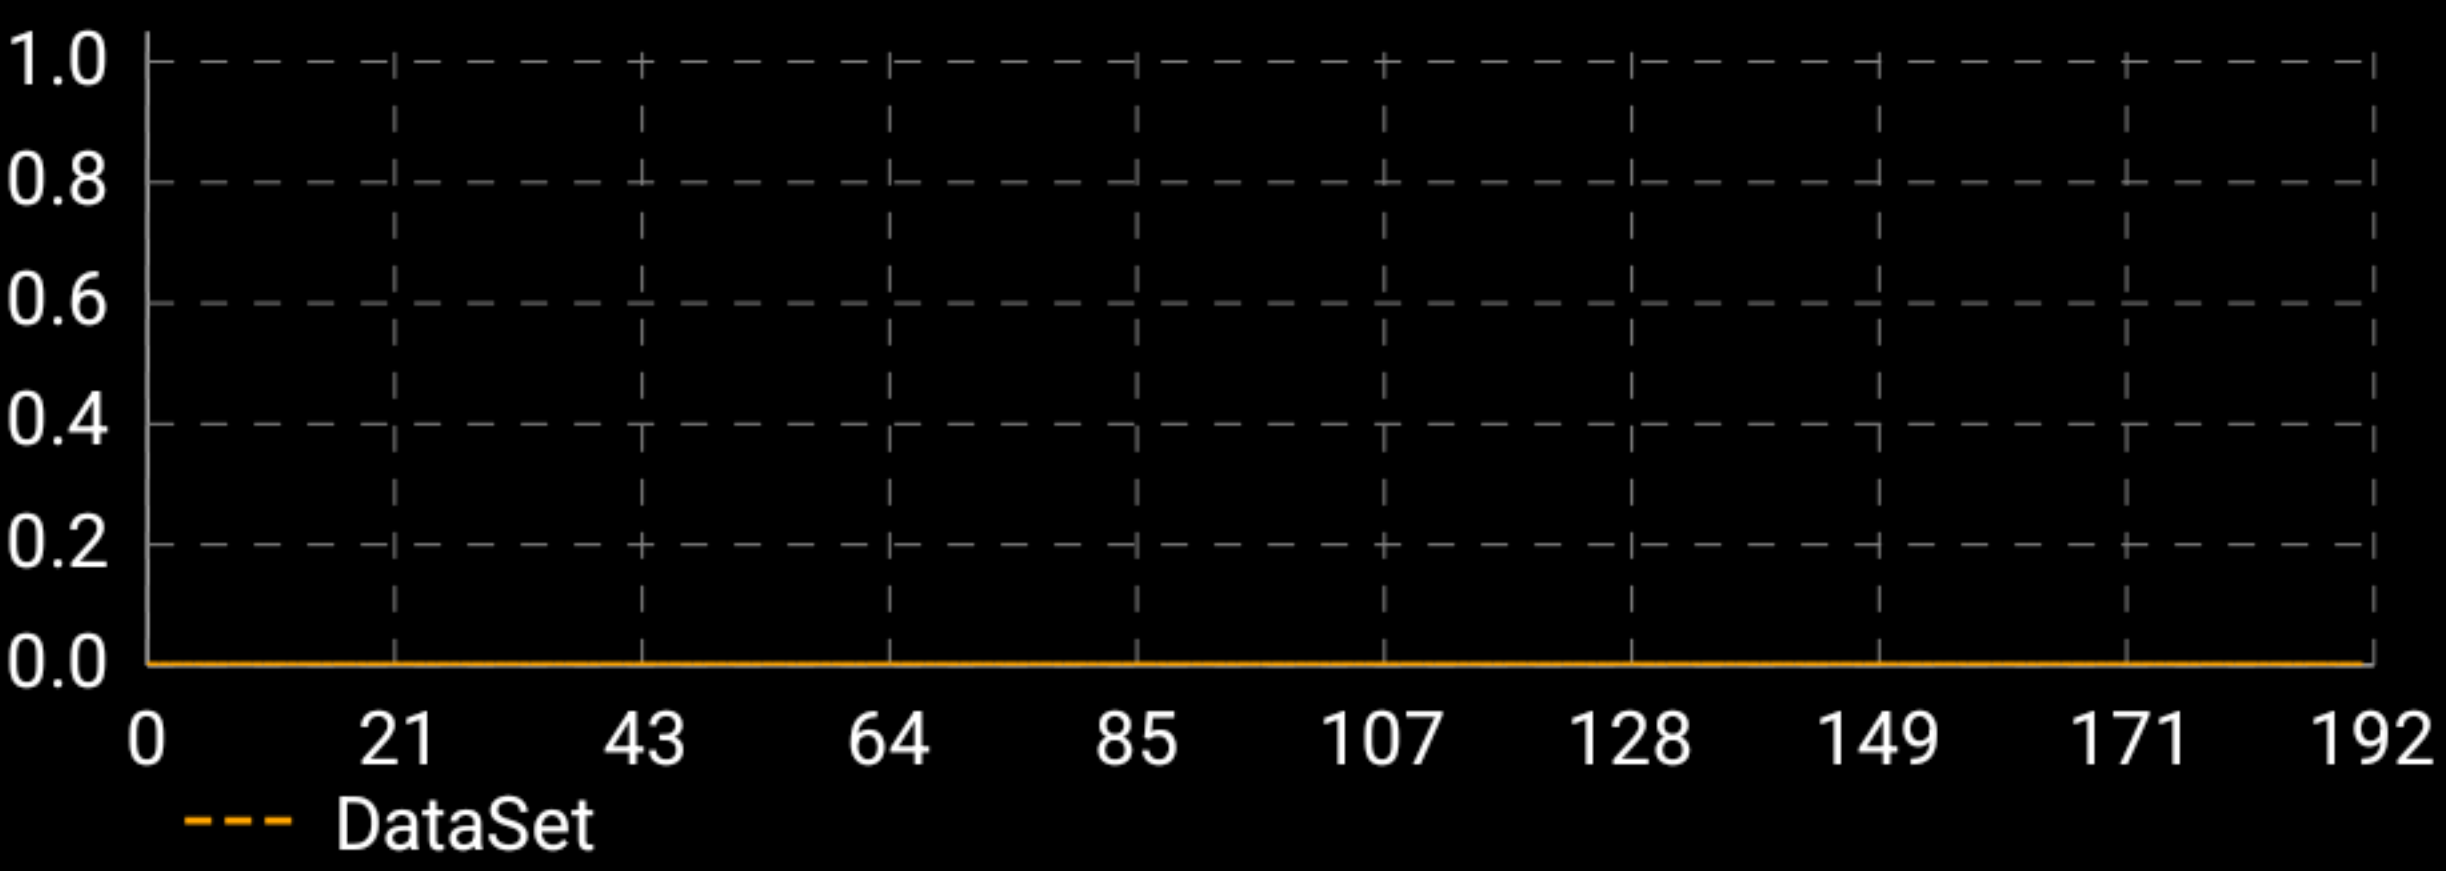

Freq. chart

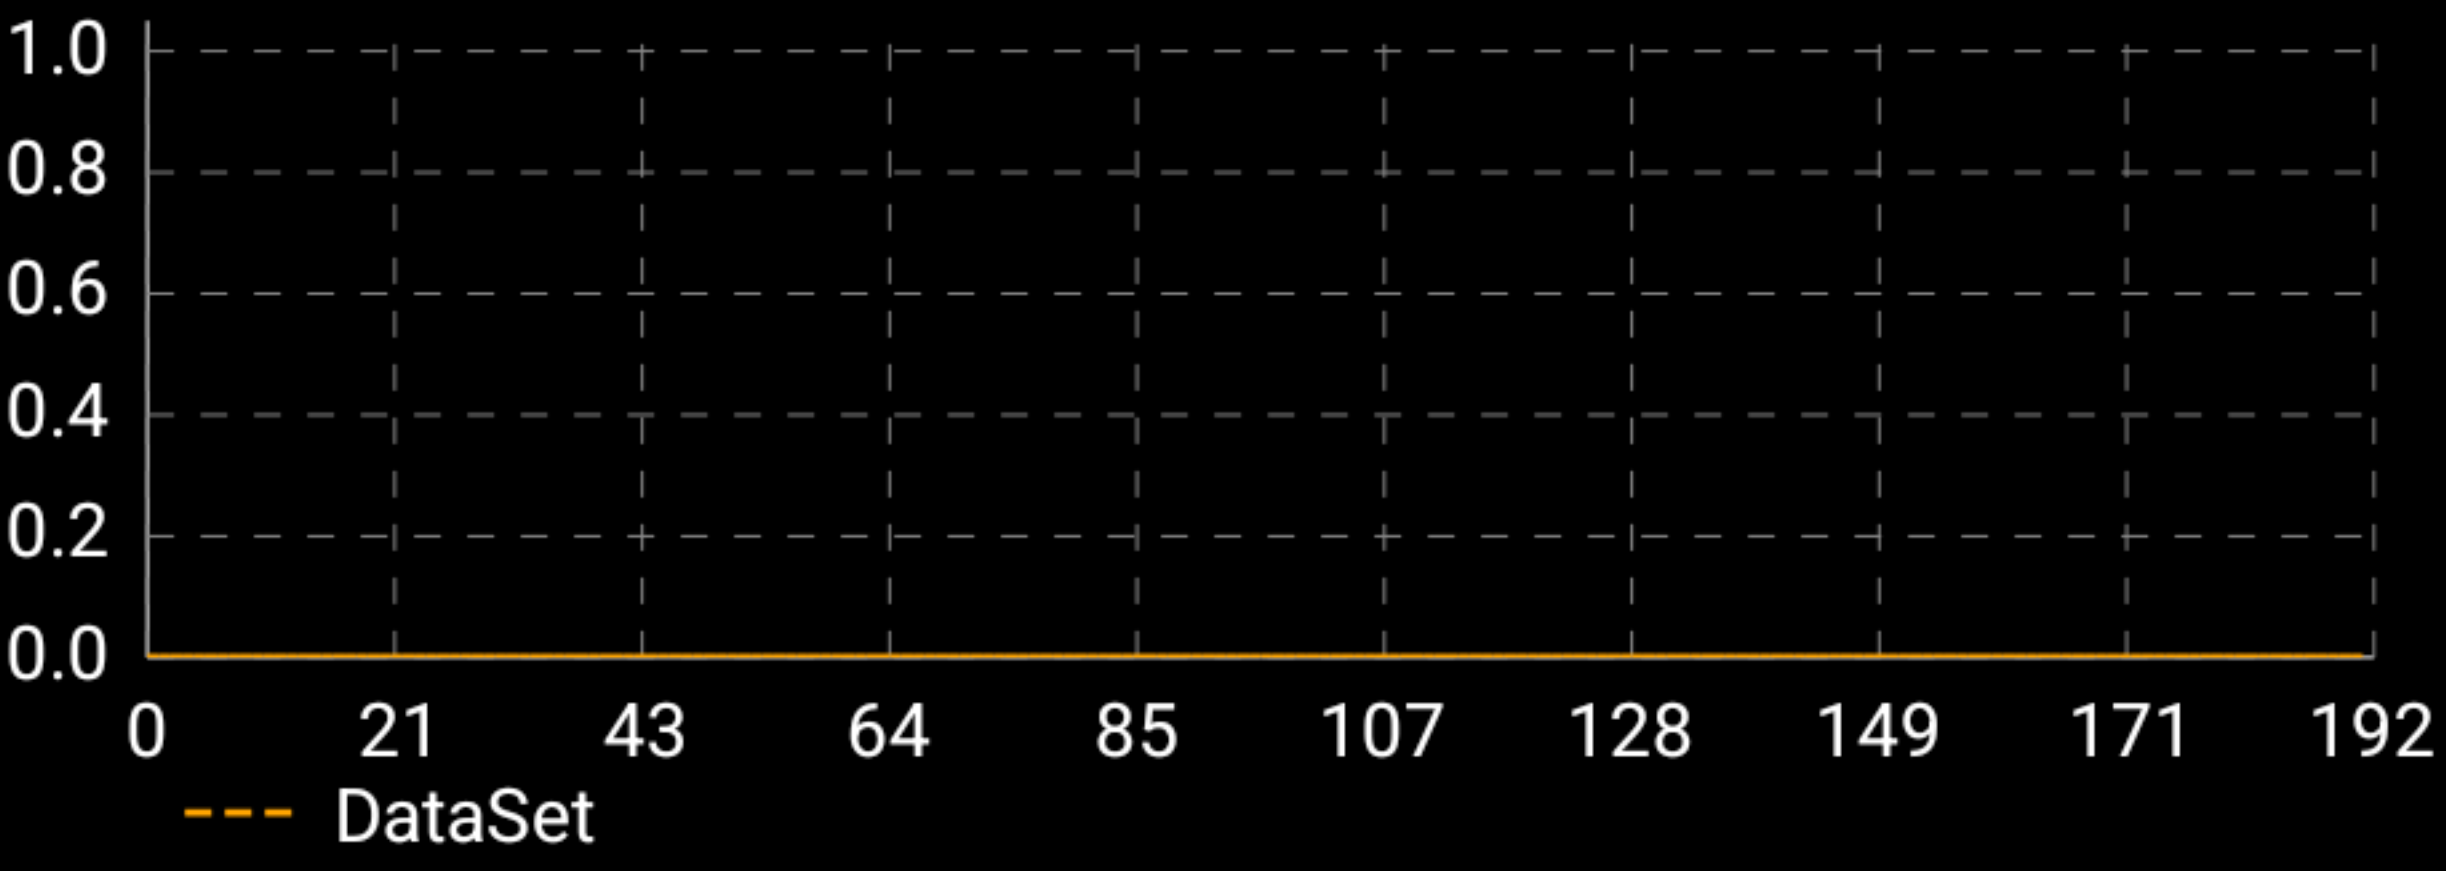

SVM	0.0
Percent flicker	0.0
Flicker index	0.0
Frequency	0.0