

In.Licht Ultra

FLEXION 75 4000K TM 30 REPORT


Lighting Facts

Color Quality:


CCT	4055.8
Ra	91.5
Rf	88.5
Rg	97.5
Duv	7.0E-4
SDCM	1.16

HCL index:


Illuminance	91.7
EML	68.21
M-EDI	61.84
S/P ratio	1.8
CAF	0.61
RG Risk	RG1
CS	0.12
SVM	0.0
Percent Flicker	0.0
Flicker Index	0.0
Frequency	0.0

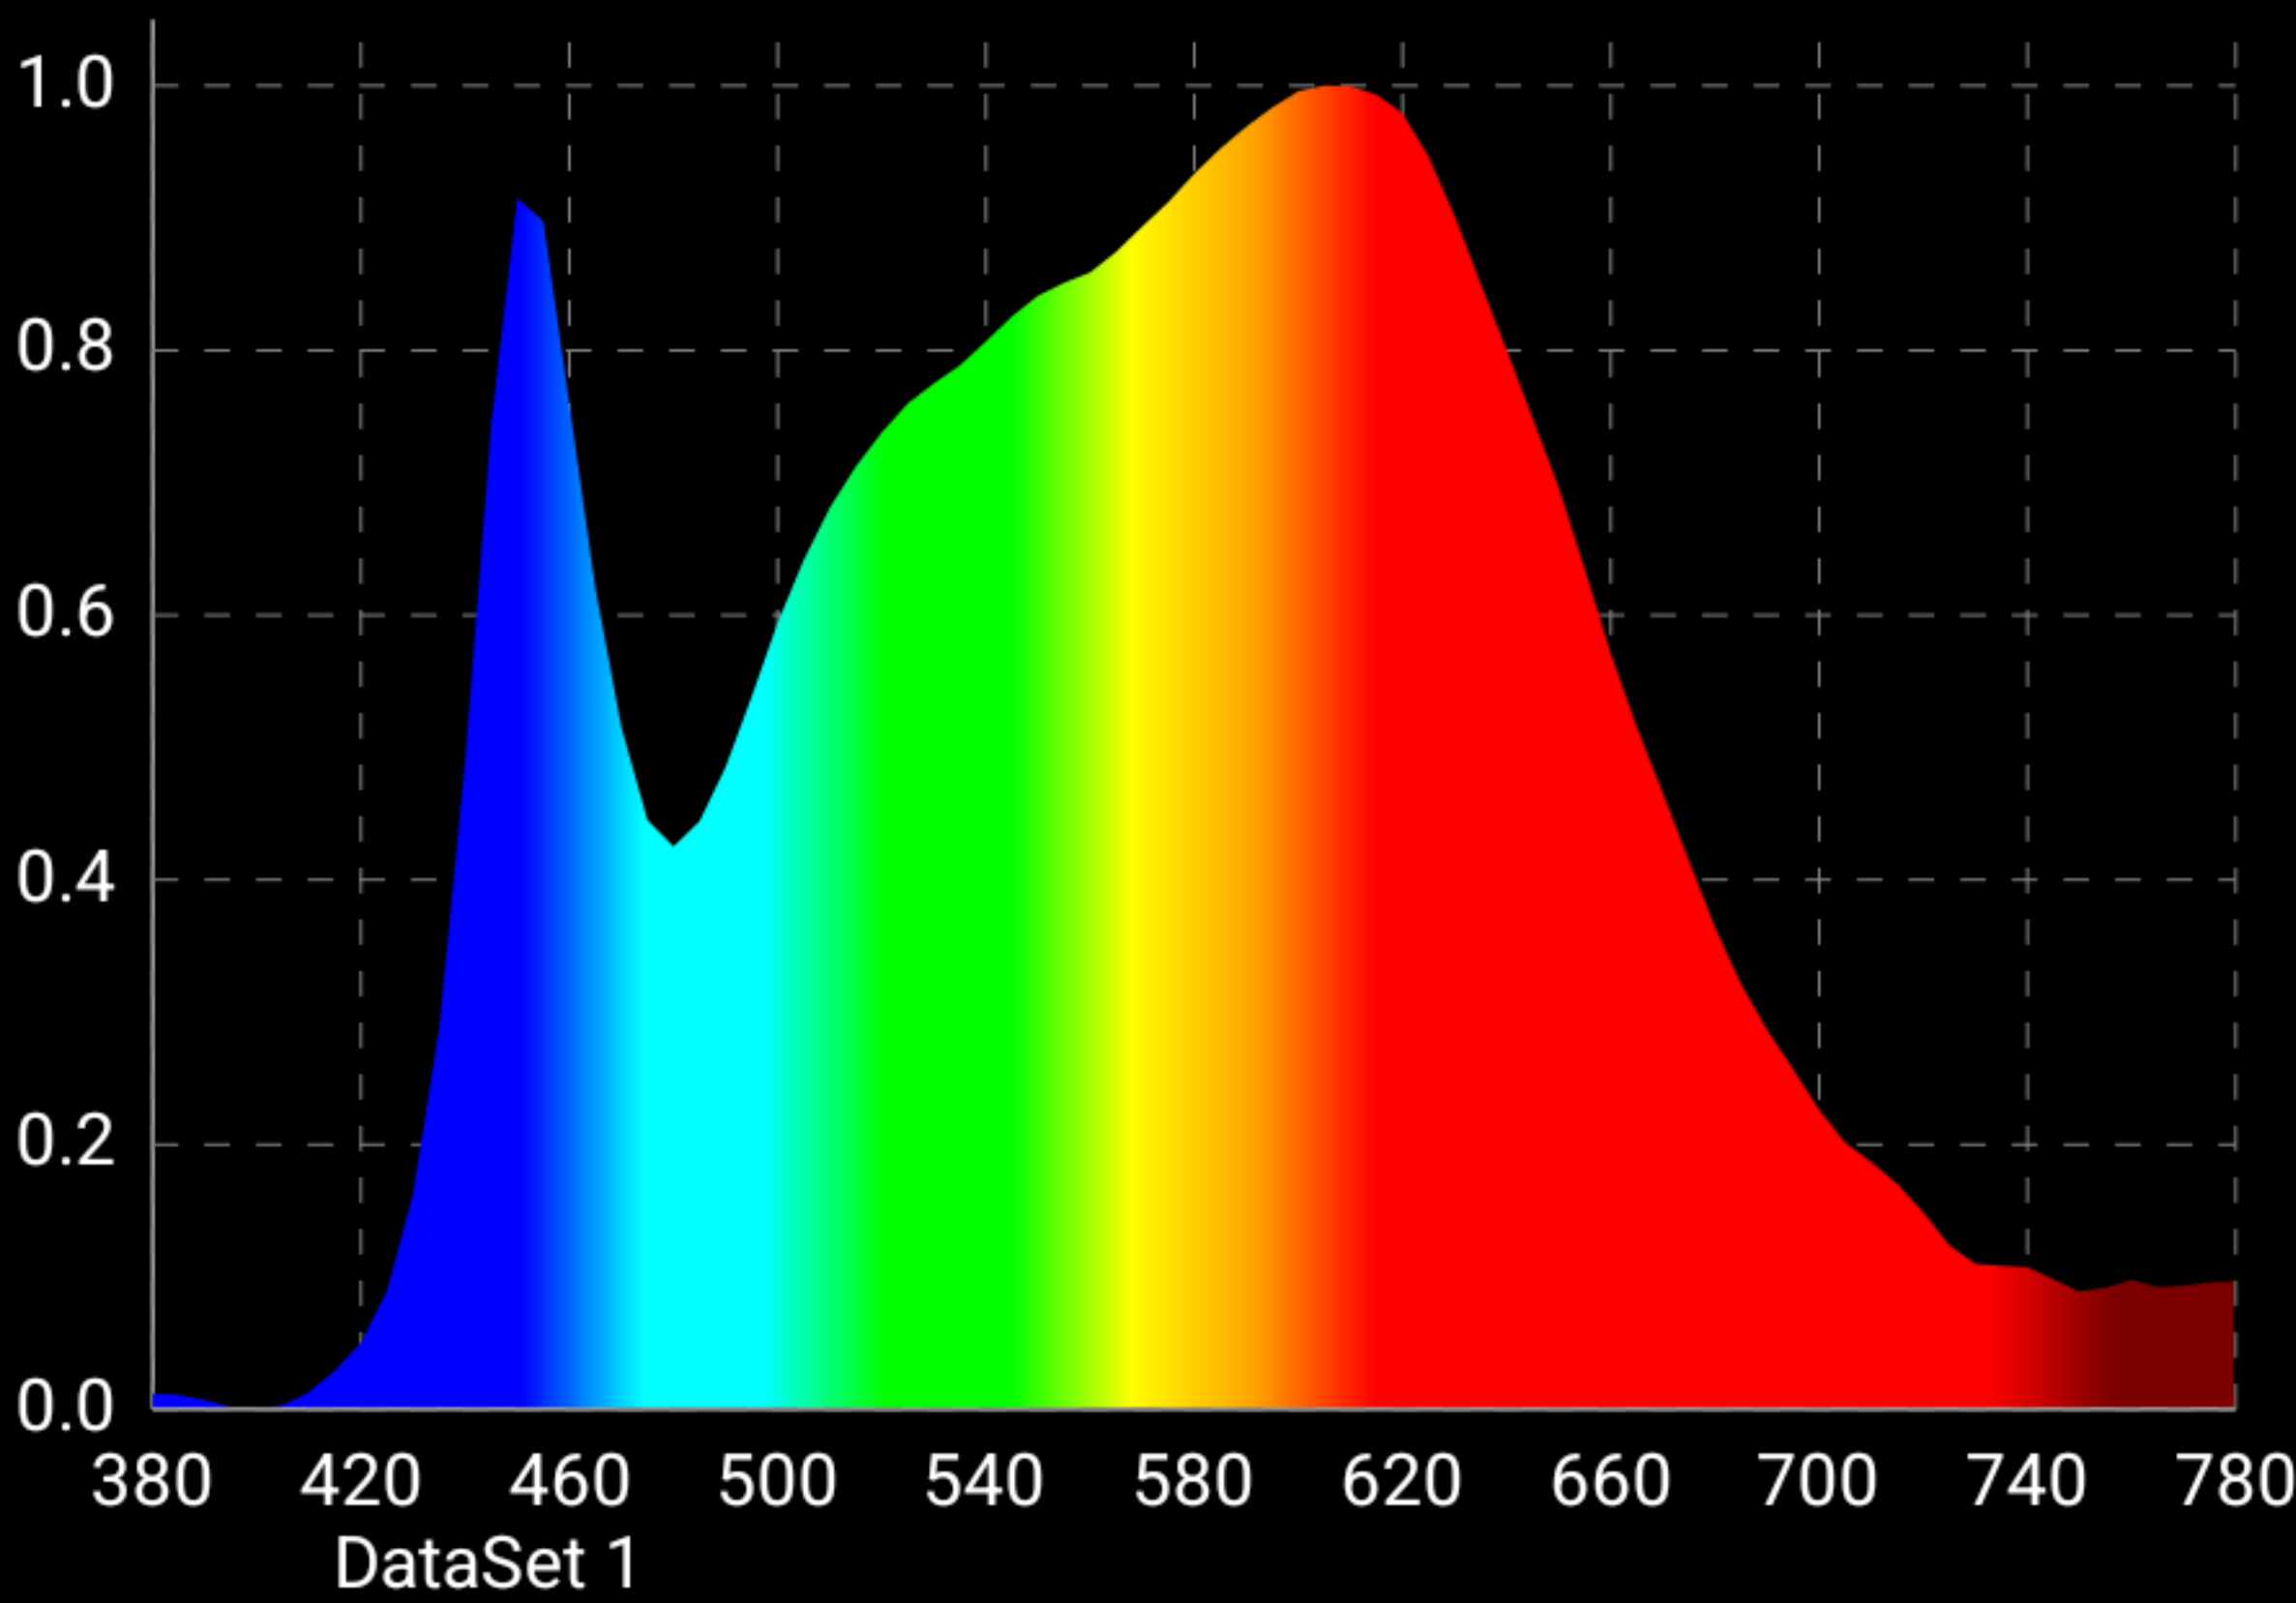

λ_d	572
λ_p	605
λ_{pV}	1.50

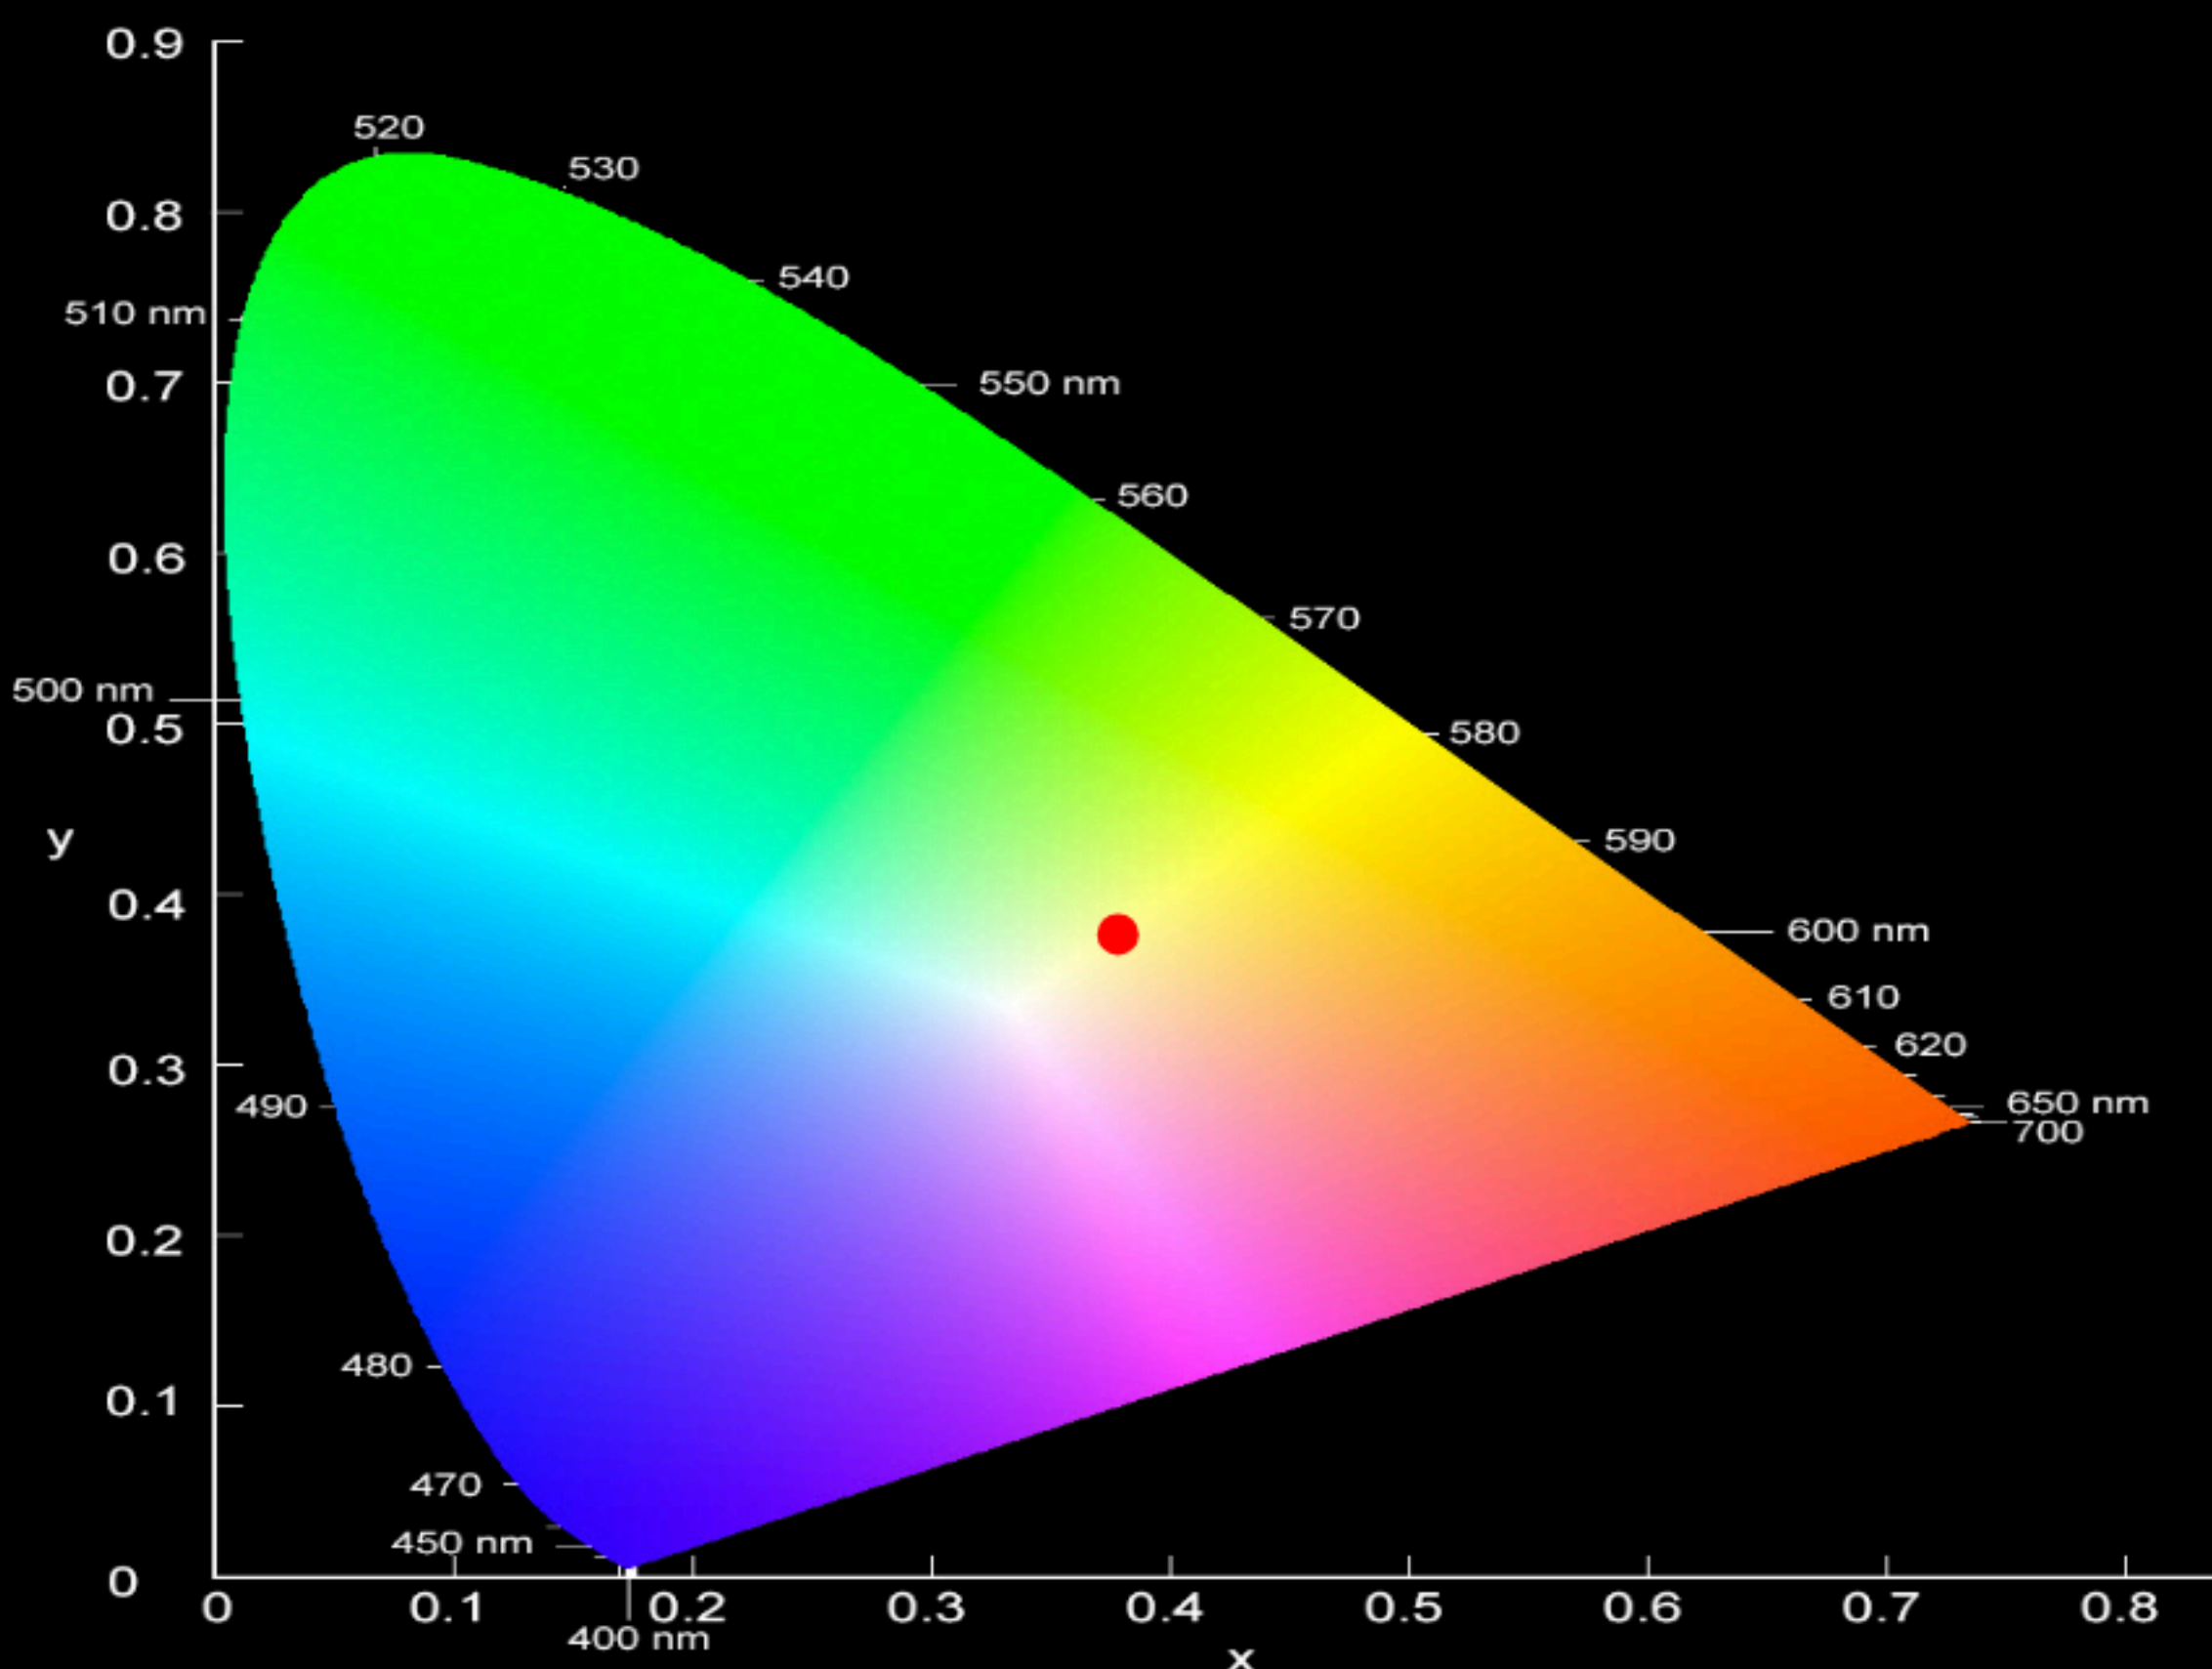


(x,y)	(0.378,0.377)
CCT	4055.8
Duv	7.0E-4

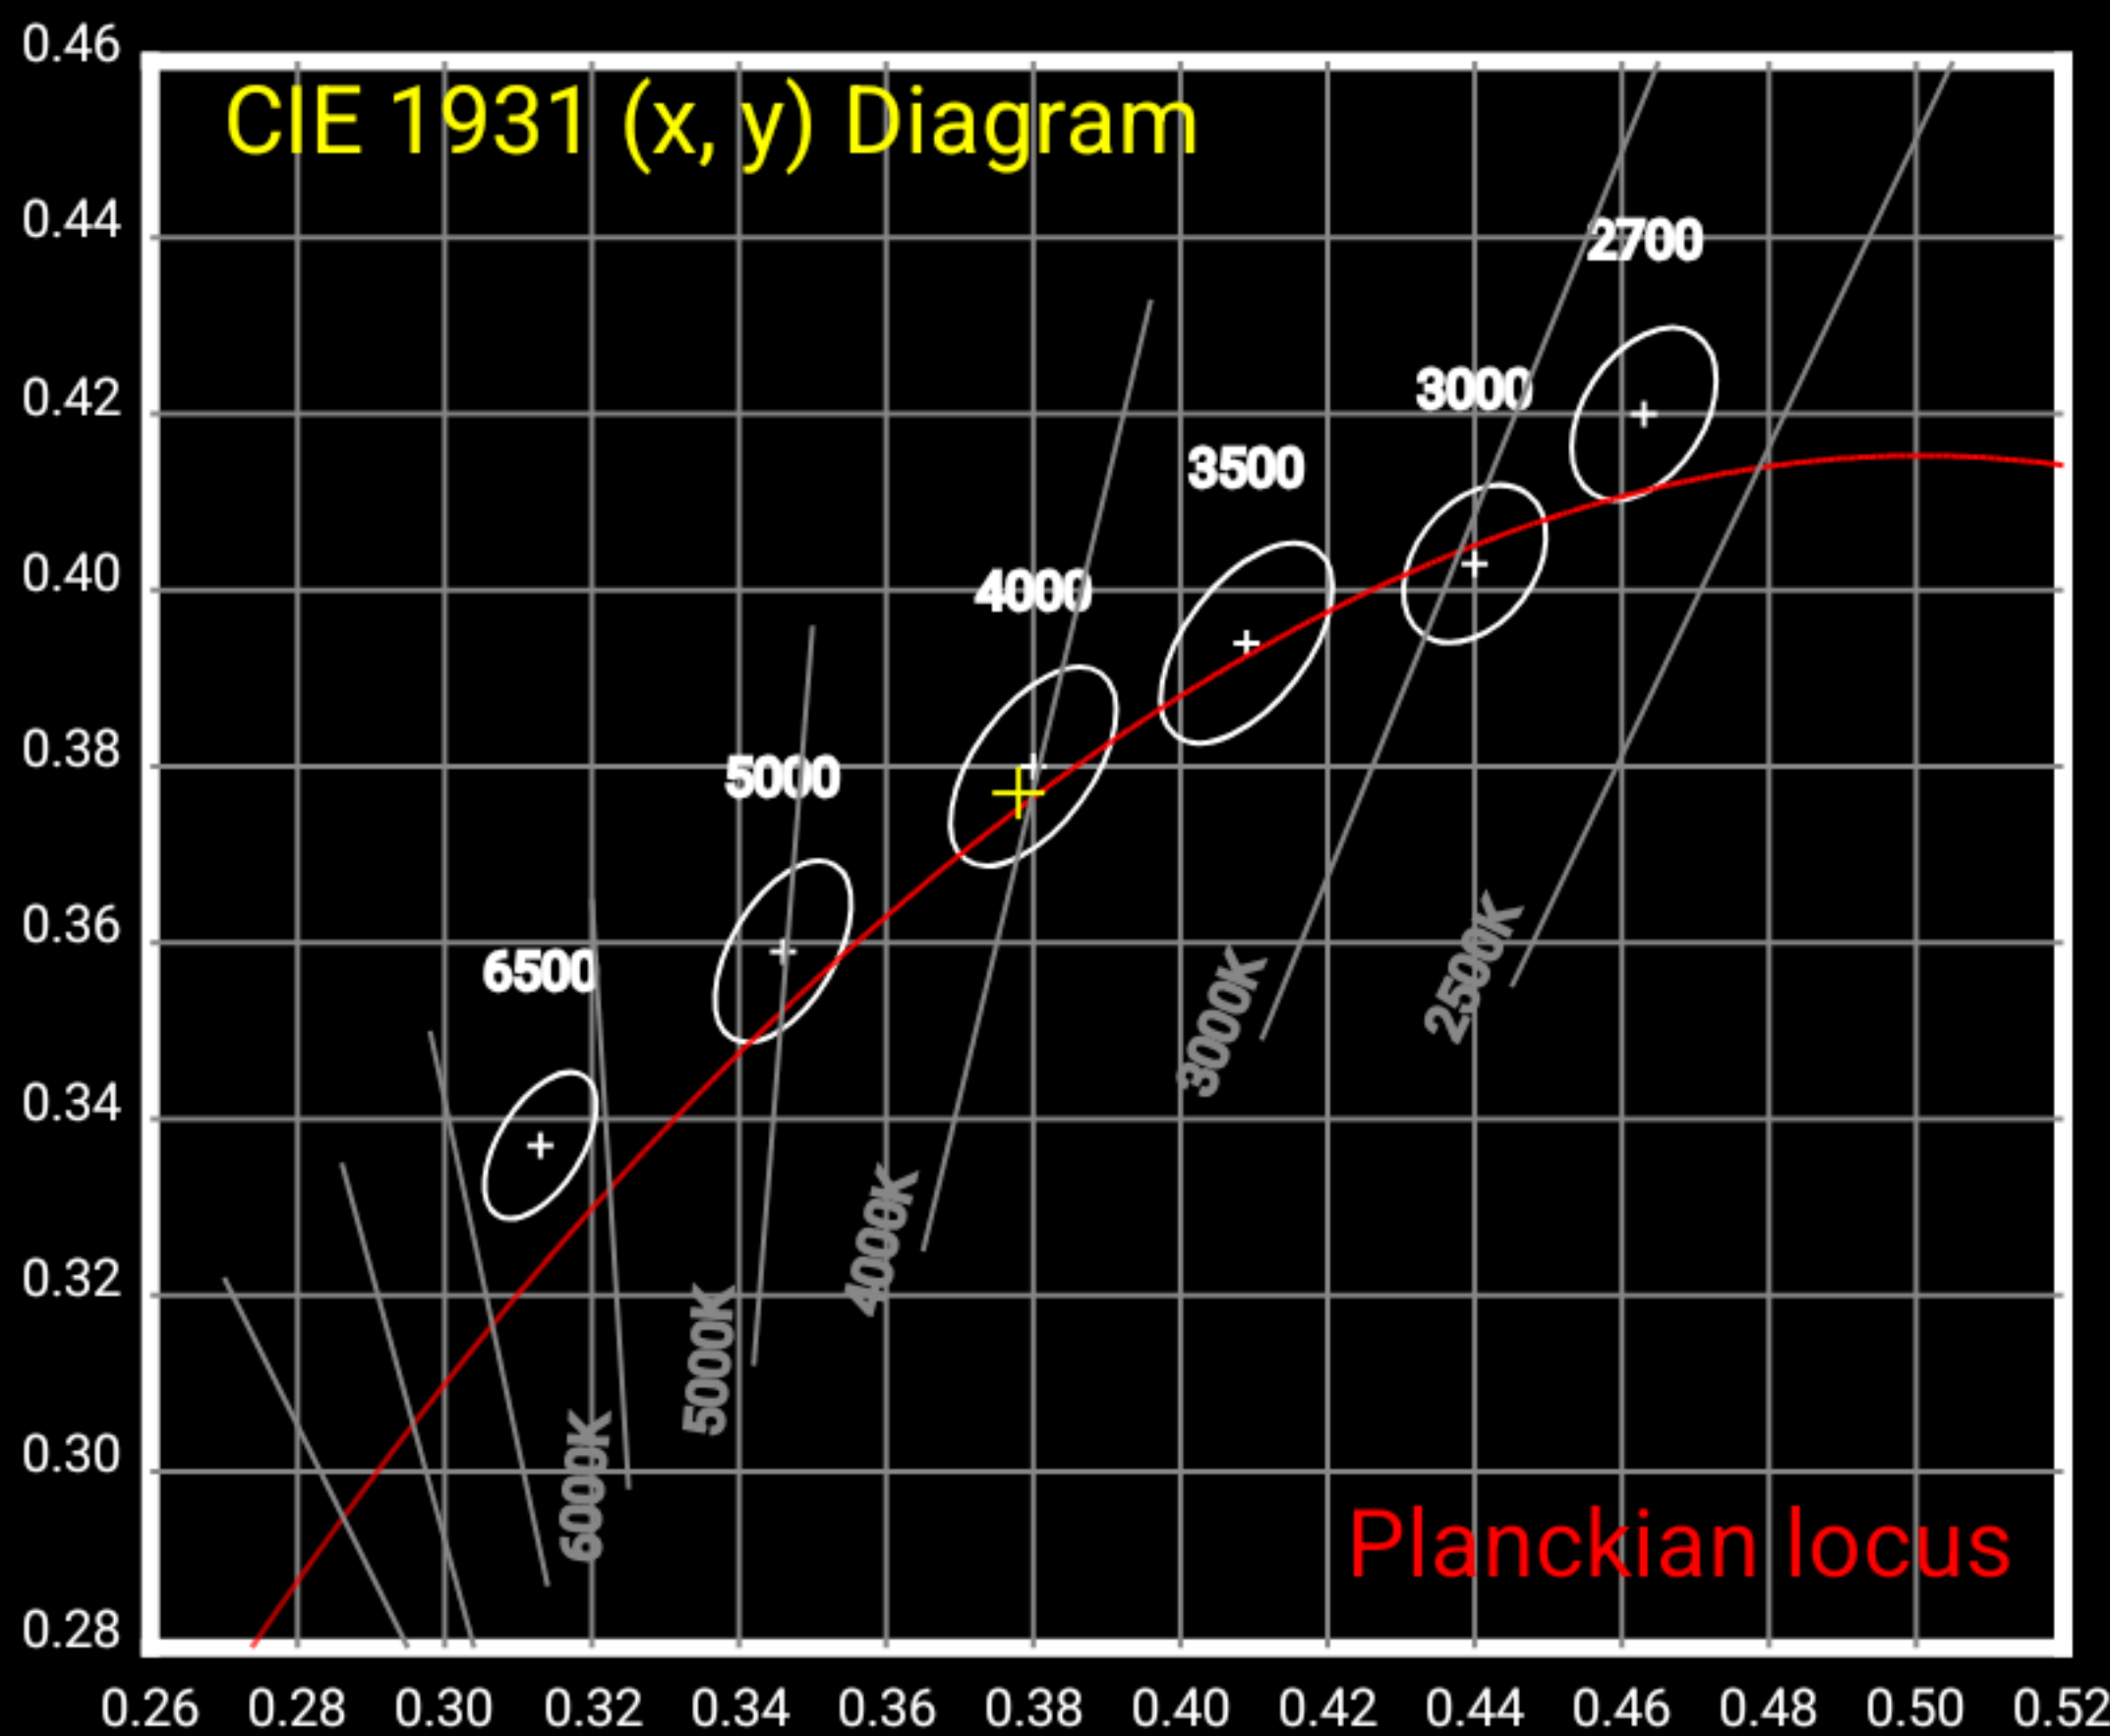


1.16
SDCM

x 0.378
y 0.377

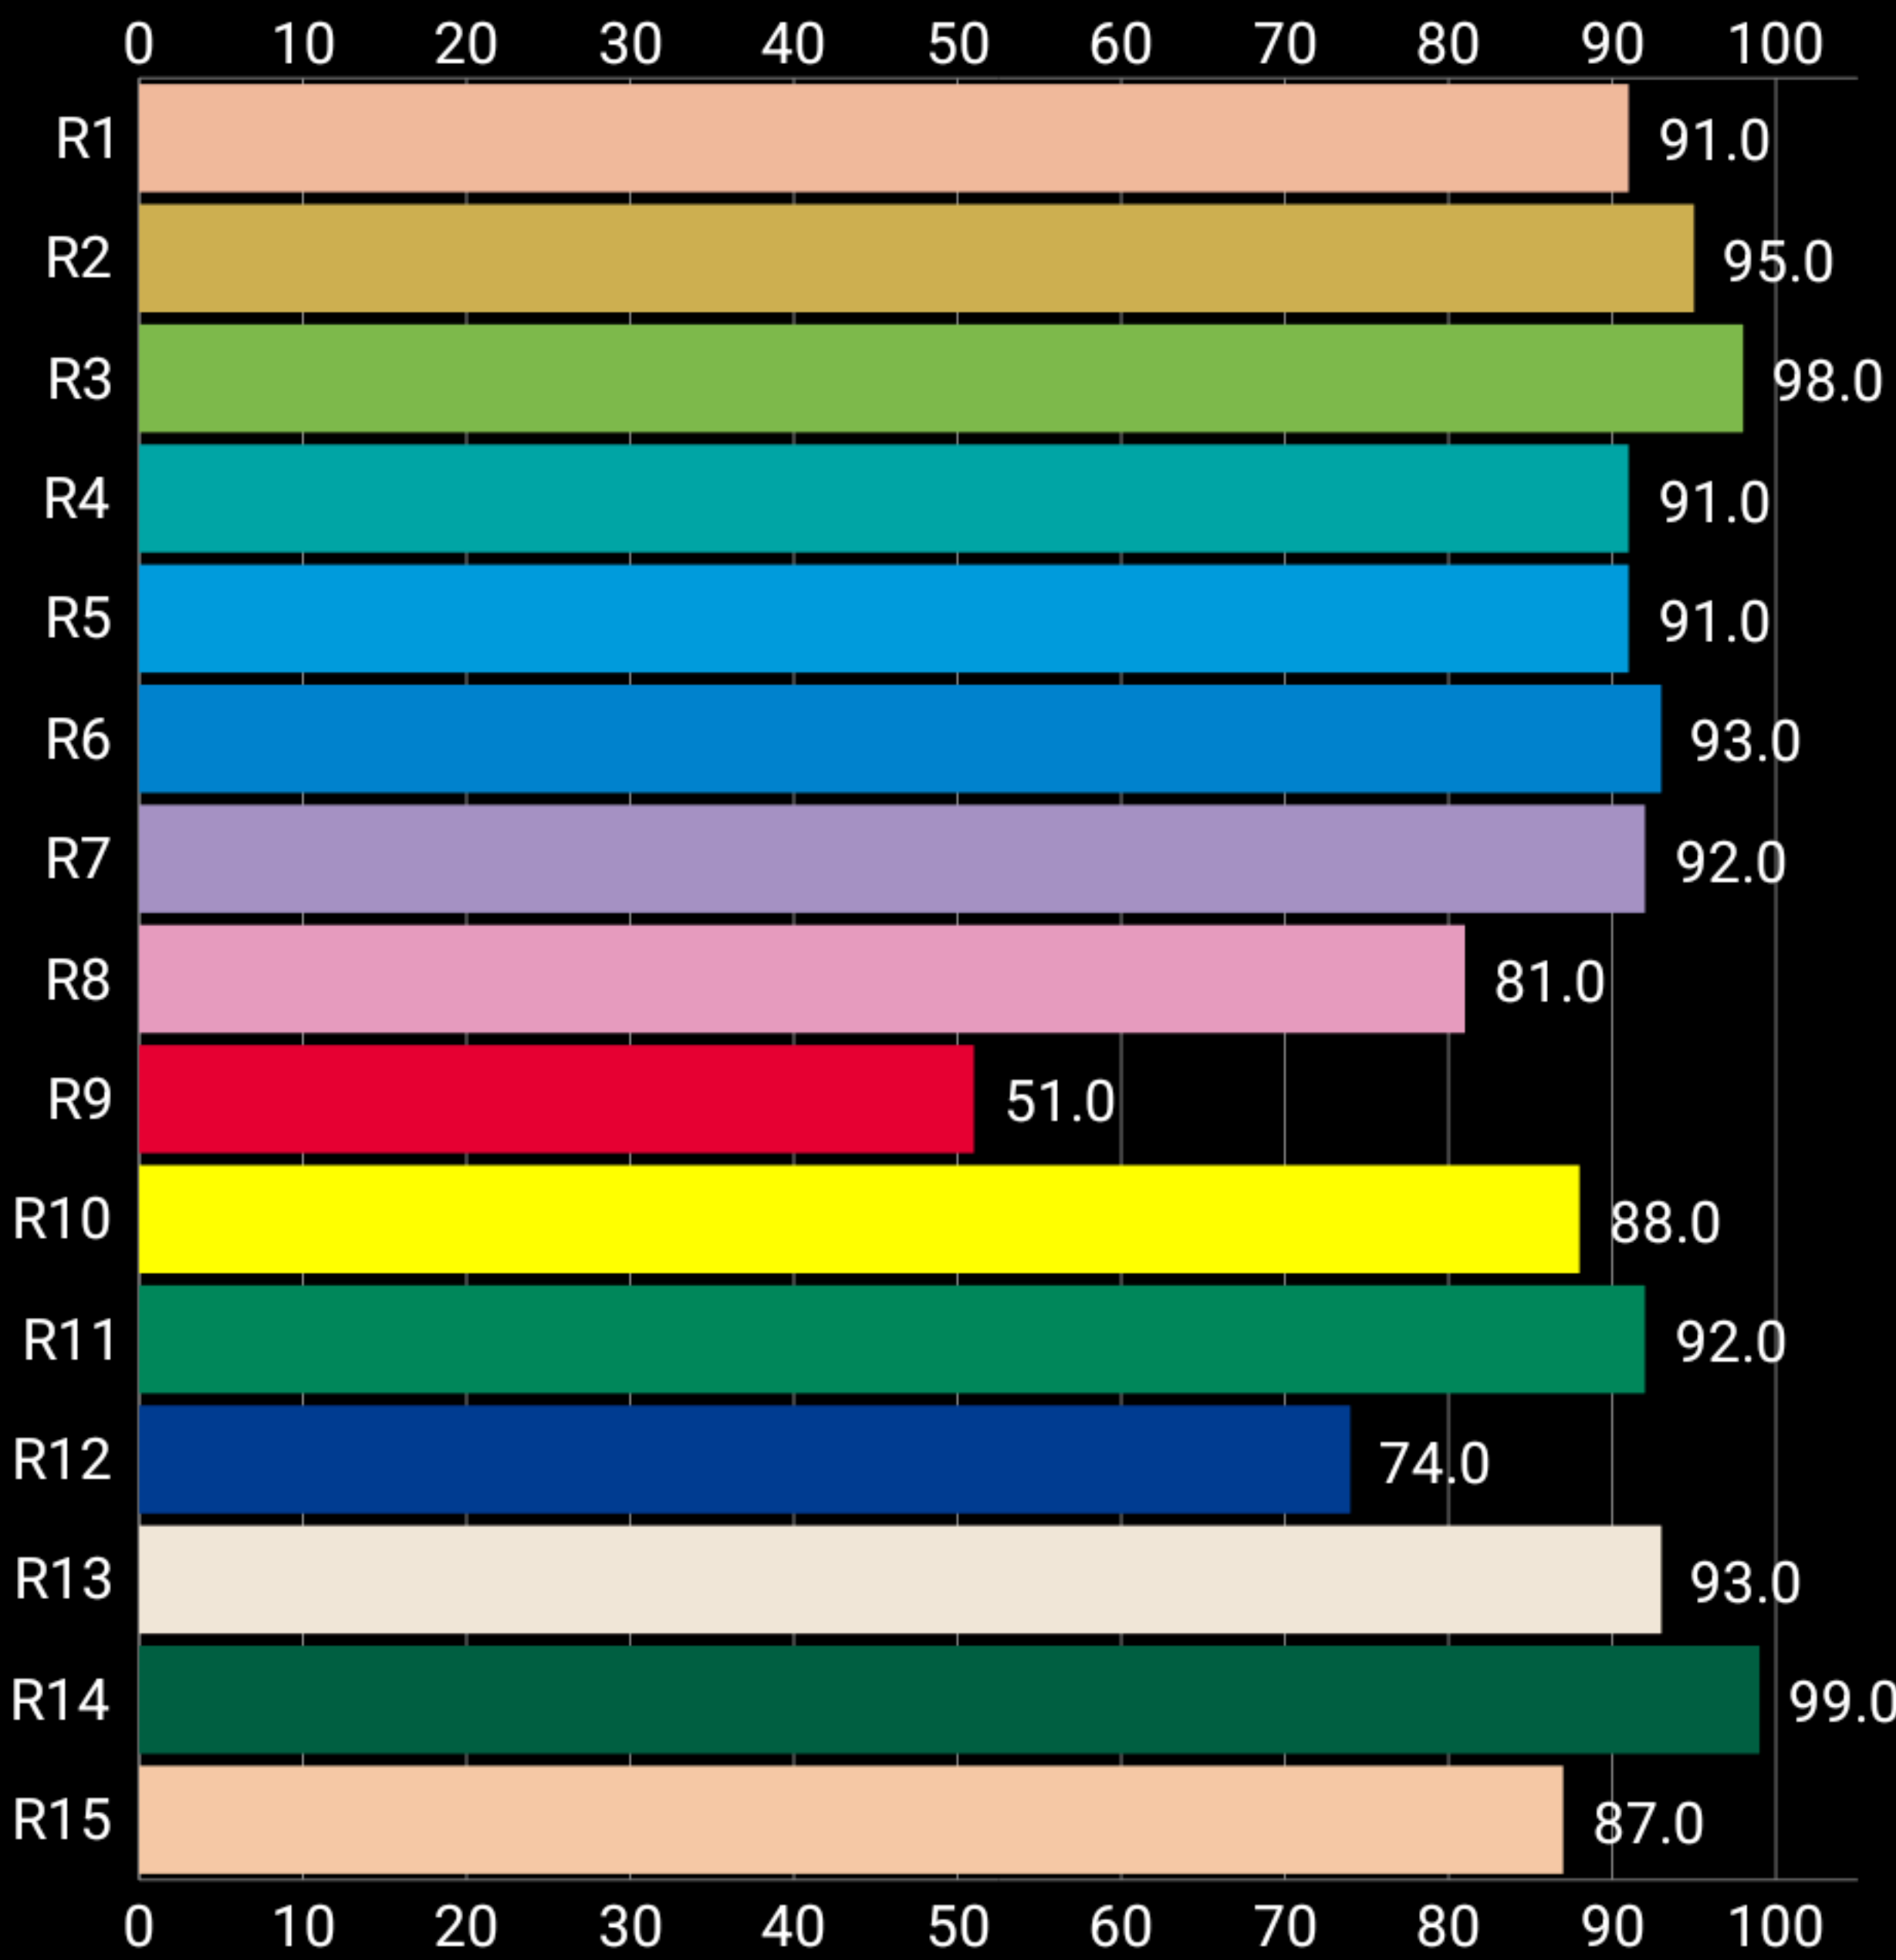


91.5
Ra

87.7
Re

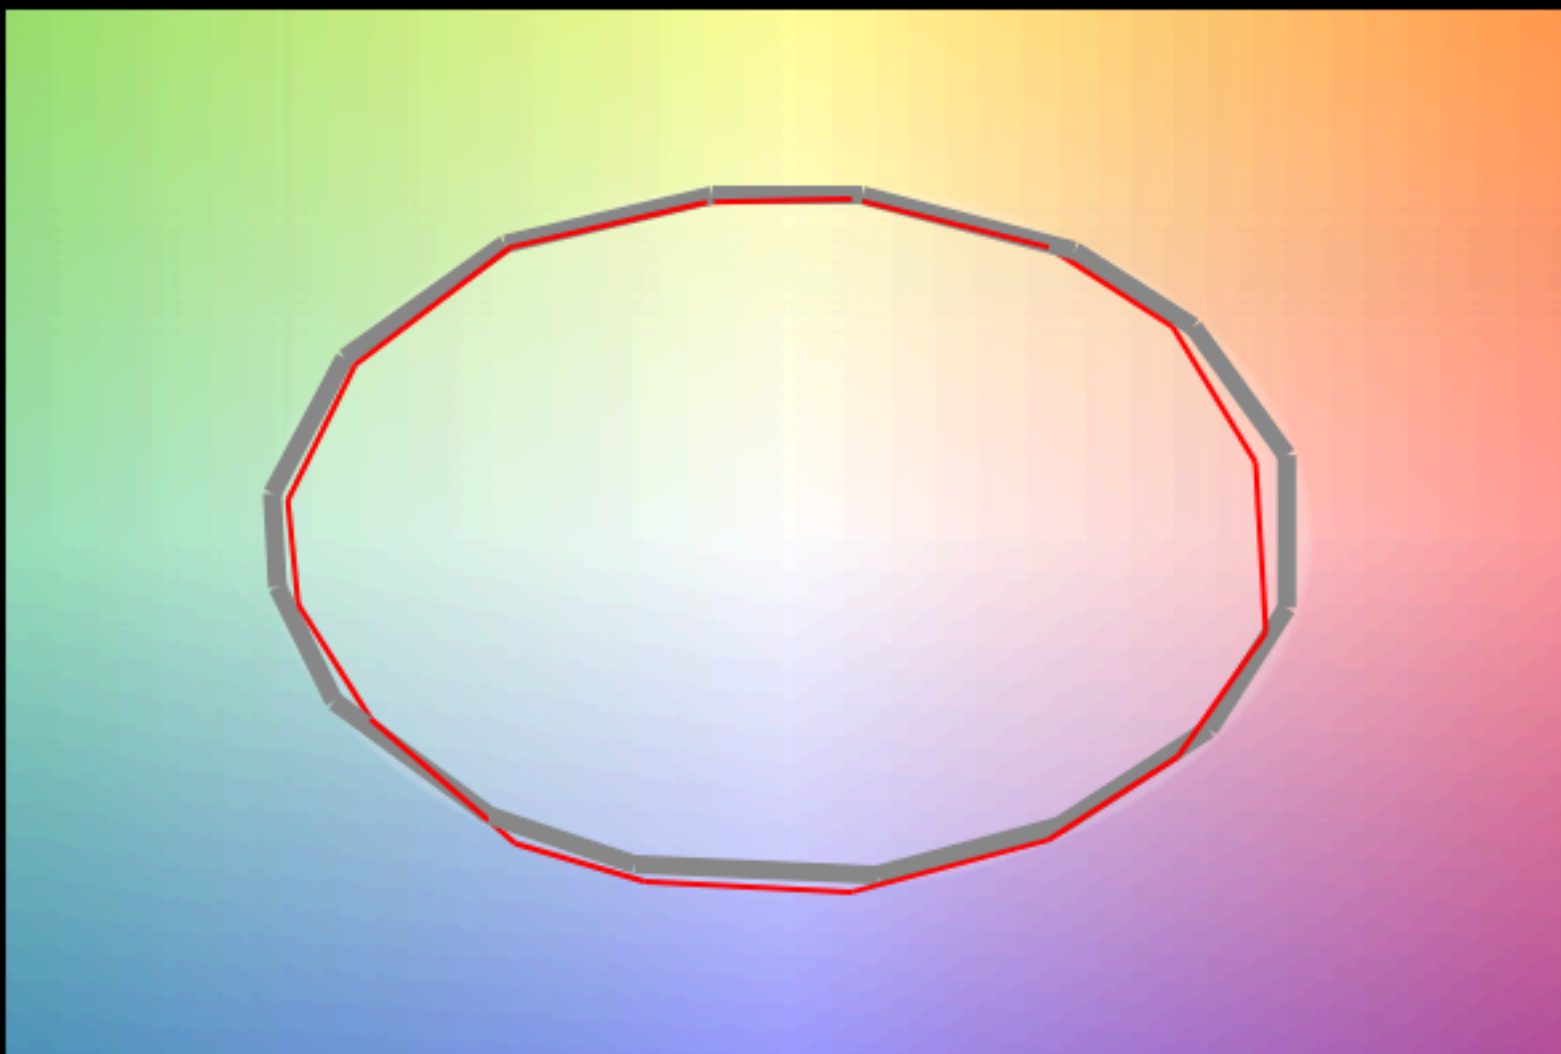


88.5
Rf

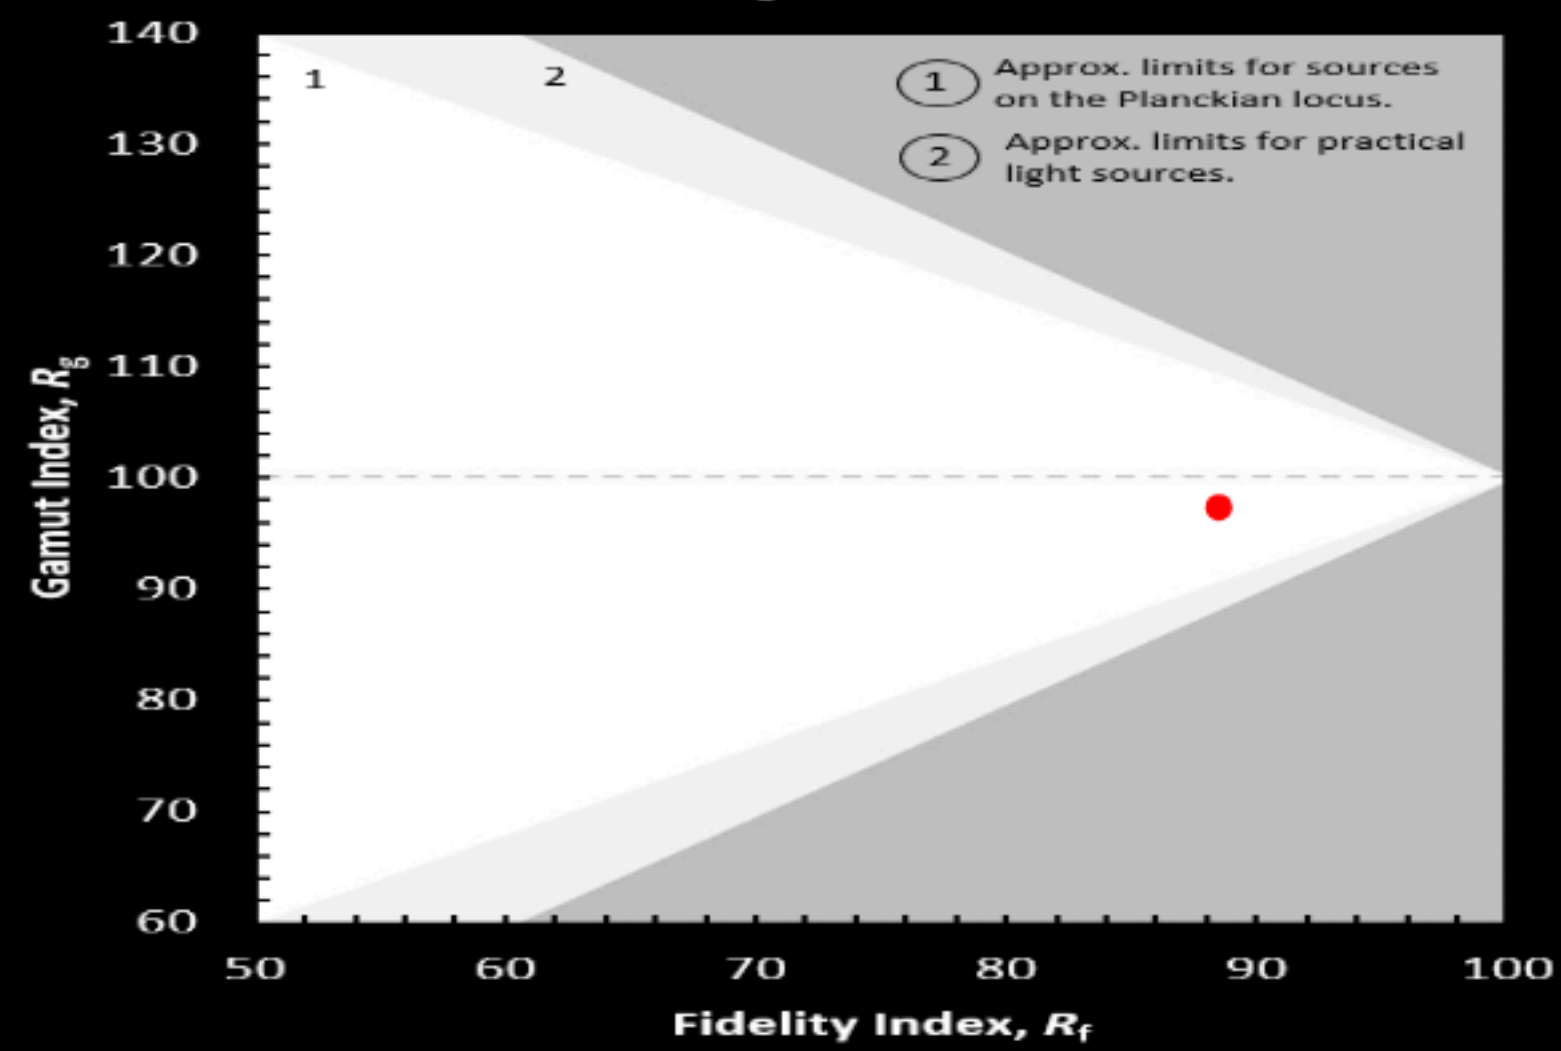


97.5
Rg

Time chart

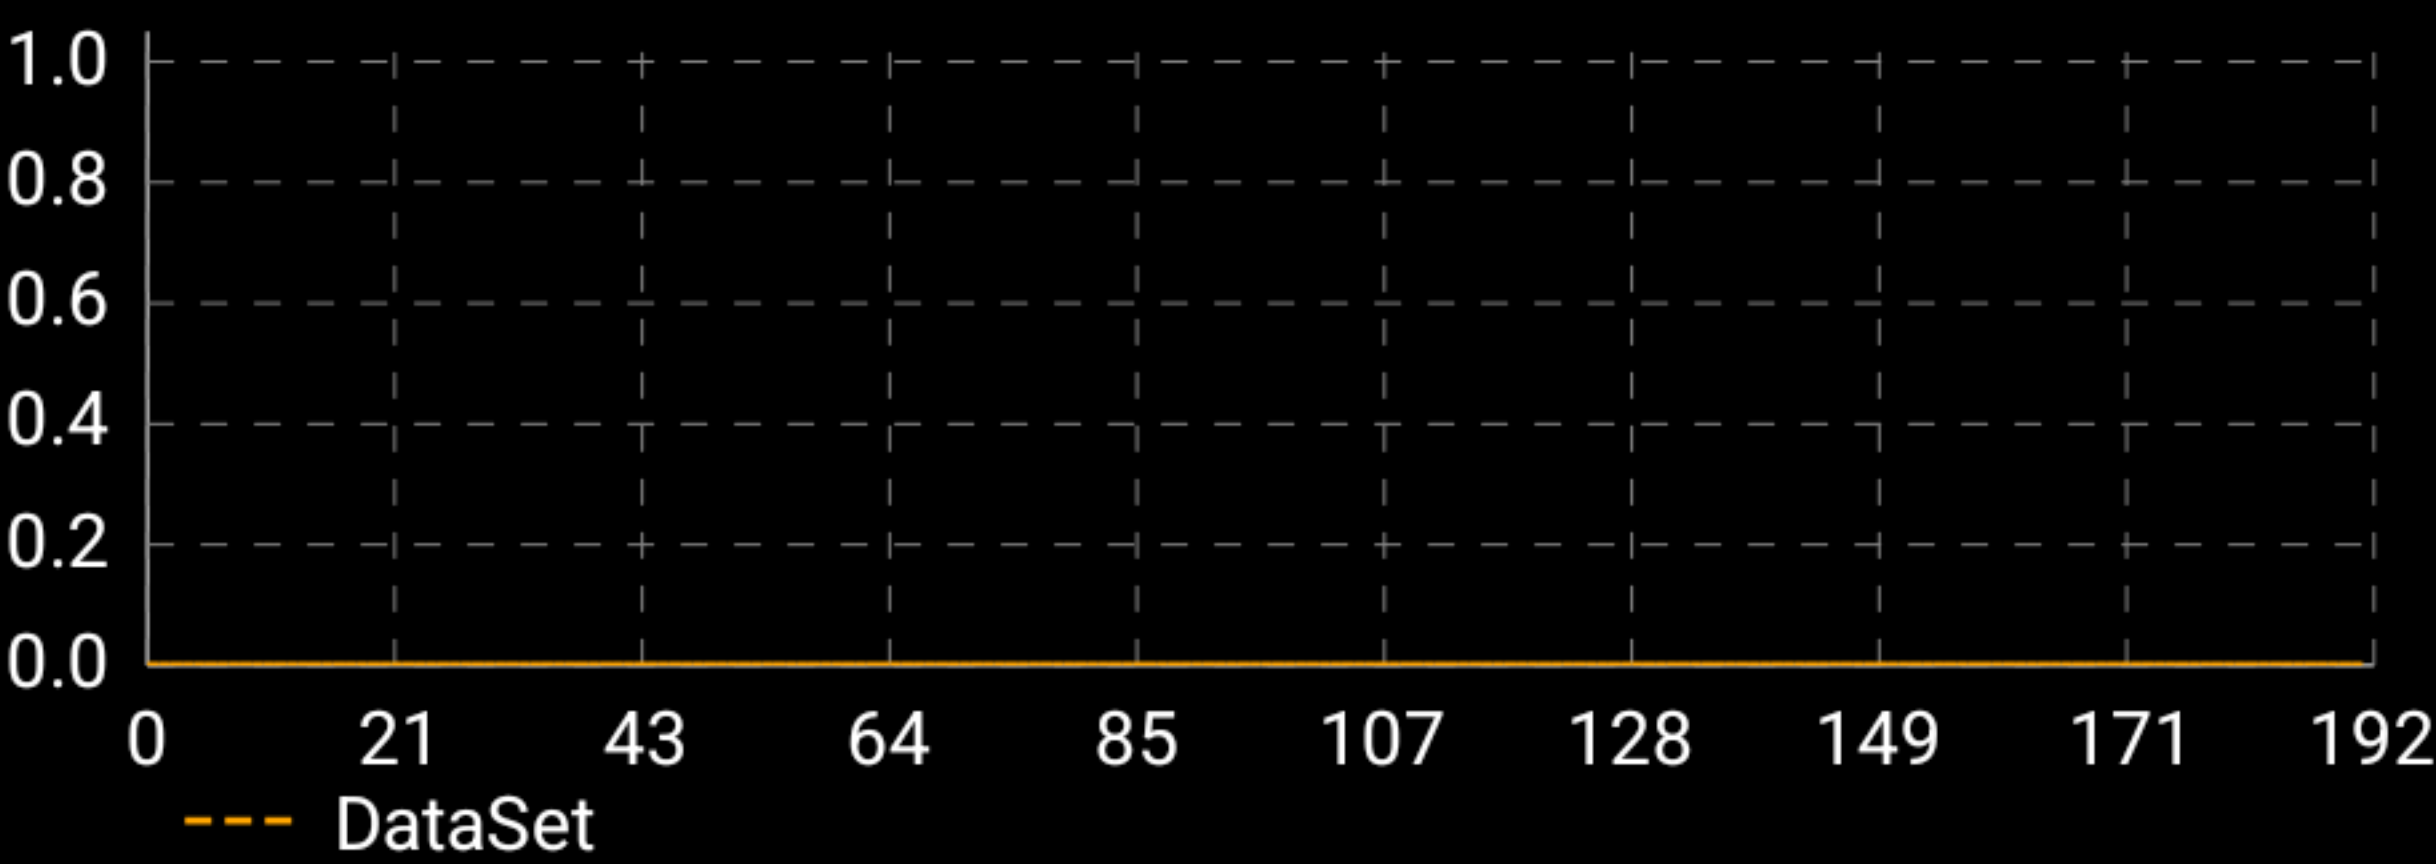

Freq. chart

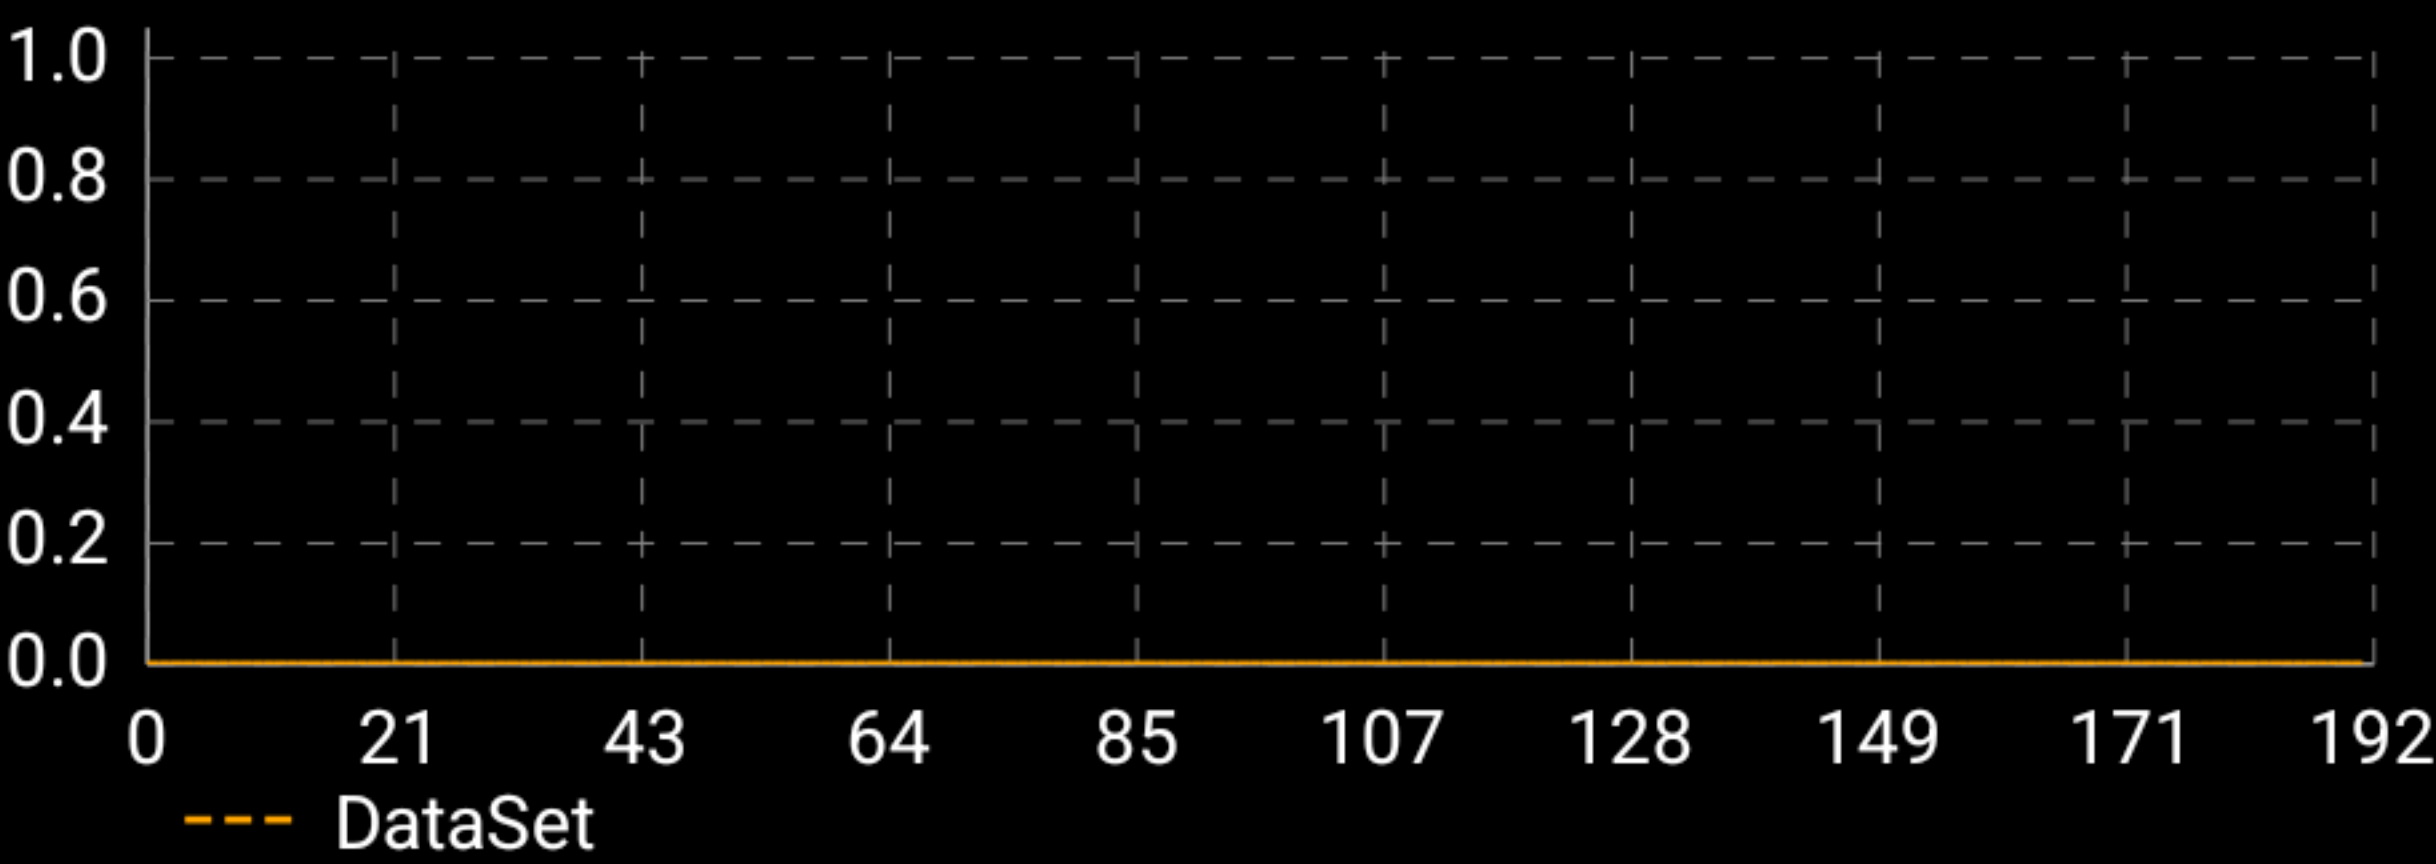

SVM	0.0
Percent flicker	0.0
Flicker index	0.0
Frequency	0.0