
FLIP IN
WALL LIGHT

Direct | Wall-Surface

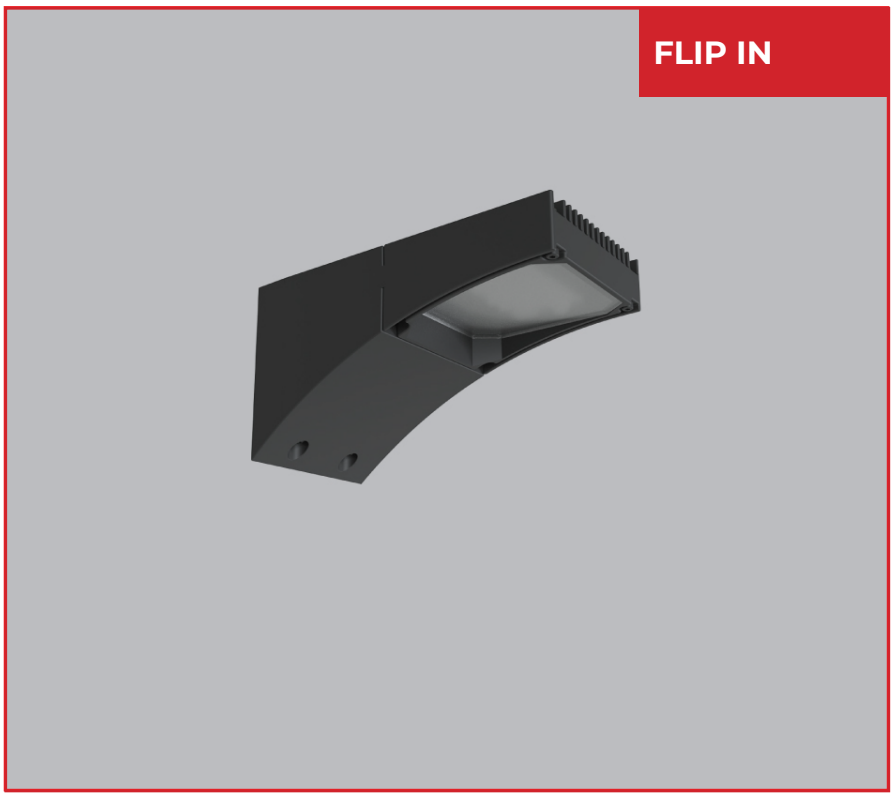

FLIP IN

INPUT 220-240 VAC | IP 65 | CRI >80

Quick Info

Mounting Type
Surface

Material Colour
Customize RAL avilable

Protection mode
IP65

Driver Details
Non-Dimmable/ Dali-Dimmable
Power Factor (PF) -0.95
THD- <10%
UGR - <19

LED
CCT- 3000K, 3500K, 4000K
CRI- ≥ 80
Life Span - L70@50000h
MacAdam - ≤3 SDCM

Beam Angle
Forword Throw

Optics
Lens
Glass

Efficacy
80lm/W


Electrical
Wattage - 20W
Input Voltage- 220-240 VAC

Physical
Length- 115mm
Width- 225mm
Front Height- 35mm, Back Height-120mm

FLIP IN FLIP IN is a surface-mounted wall light designed with a refined form and durable construction, featuring a premium finish with custom RAL colour options and IP65 protection for reliable performance. Powered by high-quality LEDs with CCT options of 3000K, 3500K and 4000K, it delivers CRI ≥ 80, L70 ≥ 50,000 hours and MacAdam ≤ 3 SDCM for consistent, high-quality illumination. With forward-throw optics, lens and glass construction, UGR < 19, power factor > 0.95 and THD < 10%, FLIP OUT provides efficient and comfortable lighting. It operates at 10W with an input voltage of 220–240V AC and supports Non-Dimmable/ Dali-Dimmable control options.

FLIP IN measures 115mm in length and 225mm in width, with a front height of 35mm and back height of 120mm. Its forward-throw distribution makes it suitable for residential, hospitality, commercial and professional spaces where focused and visually comfortable wall illumination is required. Divinity Lights offers customized lighting solutions according to specific project requirements, with flexible colour and control options for versatile installations.

Single Line Diagram
Recessed

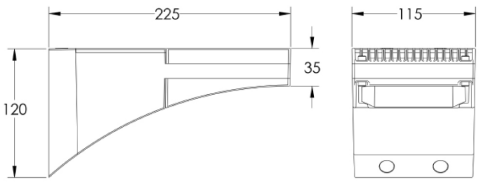

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com