
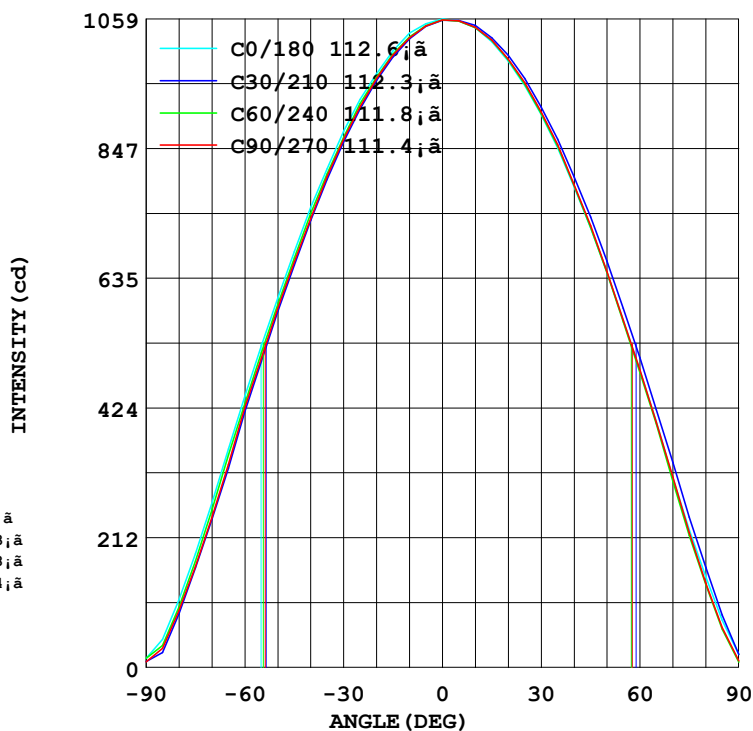


Report number:

DATA OF LAMP		I _{max} (cd)	1059	S/MH (C0/180)	1.23
MODEL	4 X 1 EDGELIT	EFFICIENCY (%)	100.0	S/MH (C90/270)	1.22
NOMINAL POWER (W)	35	TOTAL FLUX (lm)	2998.2	Voltage (V)	219.6
RATED VOLTAGE (V)	220	EFFICIENCY (lm/W)	85.9	Current (A)	0.165
NOMINAL FLUX (lm)	2998.3	η up (%)	0.0	Power (W)	34.90
LAMPS QUANTITY	1	η down (%)	100.0	Power Factor (PF)	0.990
TEST VOLTAGE (V)	219.7	Effective Flux (lm)	2944.4	EI	0.161

LUMINOUS INTENSITY DISTRIBUTION

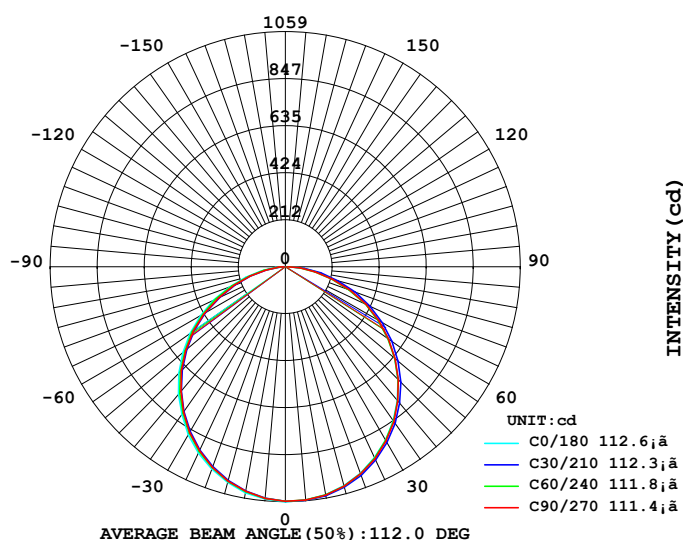

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

Color Temperature Data List

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:

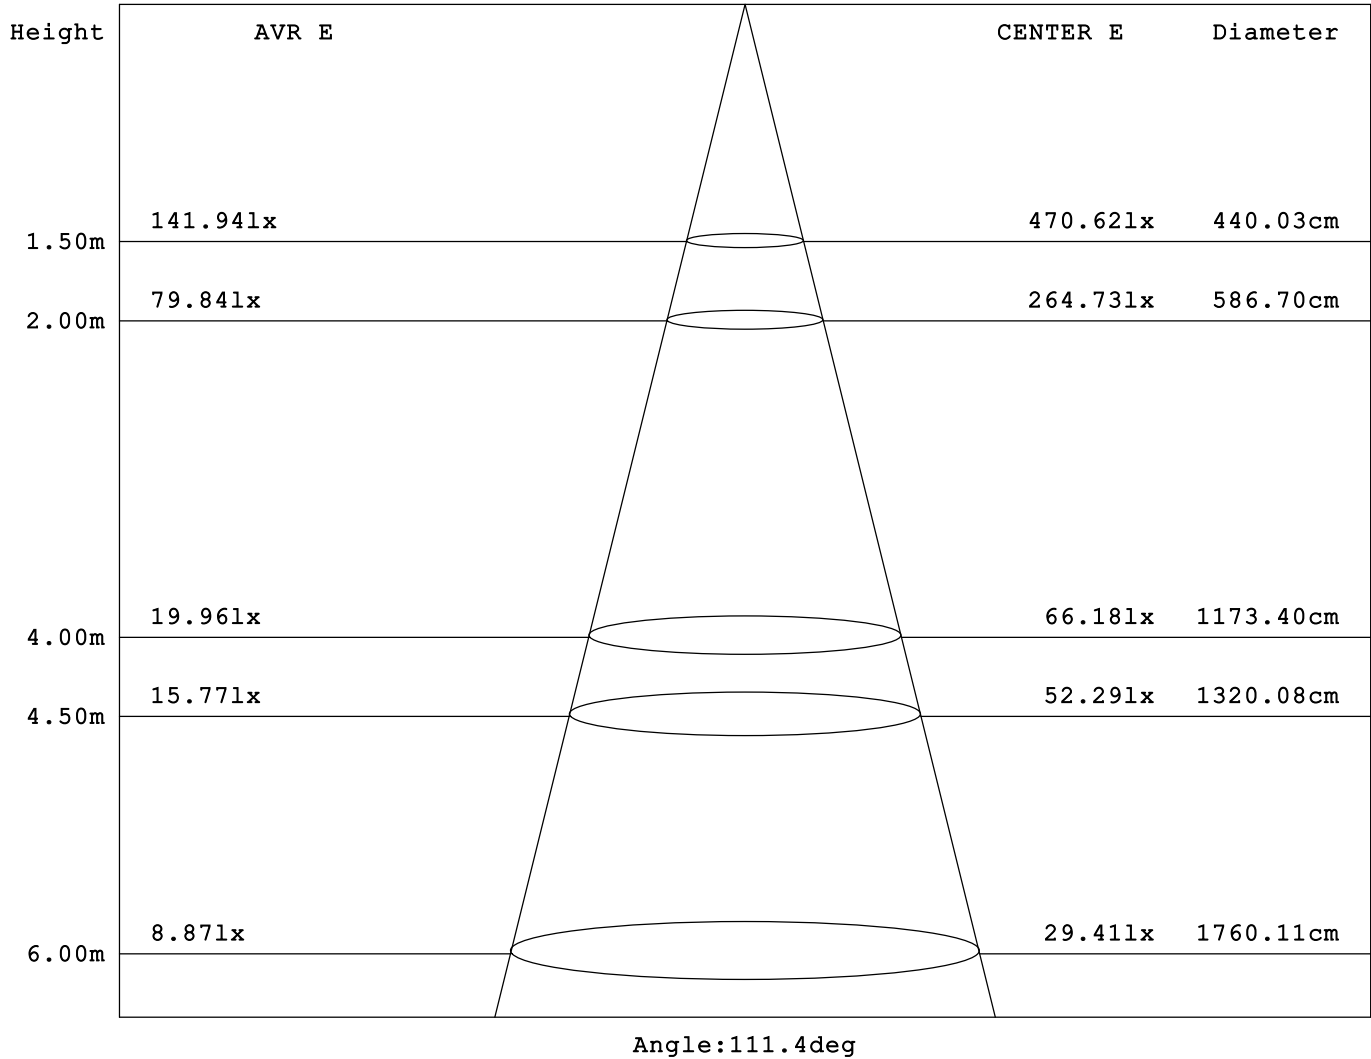

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, 301019

NAME: GENSIO 4 X 1 EDGELIT

TYPE: 3000K CRI-90

WEIGHT:

SPECIFICATION:

DIMENSION: 1200*295*15 MM

SERIAL No.:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Zone	total
10.0	1035	1028	1028	1036	1044	1046	1045	1038	0- 10	99.95	99.95
20.0	969.3	960.8	961.7	976.7	990.2	996.0	993.2	981.3	10- 20	285.7	385.6
30.0	875.0	861.5	862.2	883.5	902.9	909.8	907.2	888.9	20- 30	431.5	817.1
40.0	750.6	735.3	732.7	761.2	784.9	794.1	788.1	766.8	30- 40	518.3	1336
50.0	602.7	586.4	585.6	617.2	644.7	653.7	645.9	621.9	40- 50	535.8	1871
60.0	442.0	423.8	424.1	457.7	484.3	493.4	485.8	458.1	50- 60	483.2	2355
70.0	267.5	248.9	244.3	281.0	308.8	319.2	310.7	277.4	60- 70	367.9	2723
80.0	110.0	92.46	92.05	122.6	147.6	149.3	137.3	115.5	70- 80	211.1	2934
90.0	14.98	12.18	9.295	12.13	21.20	14.98	10.83	6.994	80- 90	64.62	2998
100.0									90-100		
110.0									100-110		
120.0									110-120		
130.0									120-130		
140.0									130-140		
150.0									140-150		
160.0									150-160		
170.0									160-170		
180.0									170-180		
DEG	LUMINOUS INTENSITY:cd									UNIT:lm	

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:9.500 m
 Remarks: 3000K


LUMINANCE LIMITATION CURVES

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

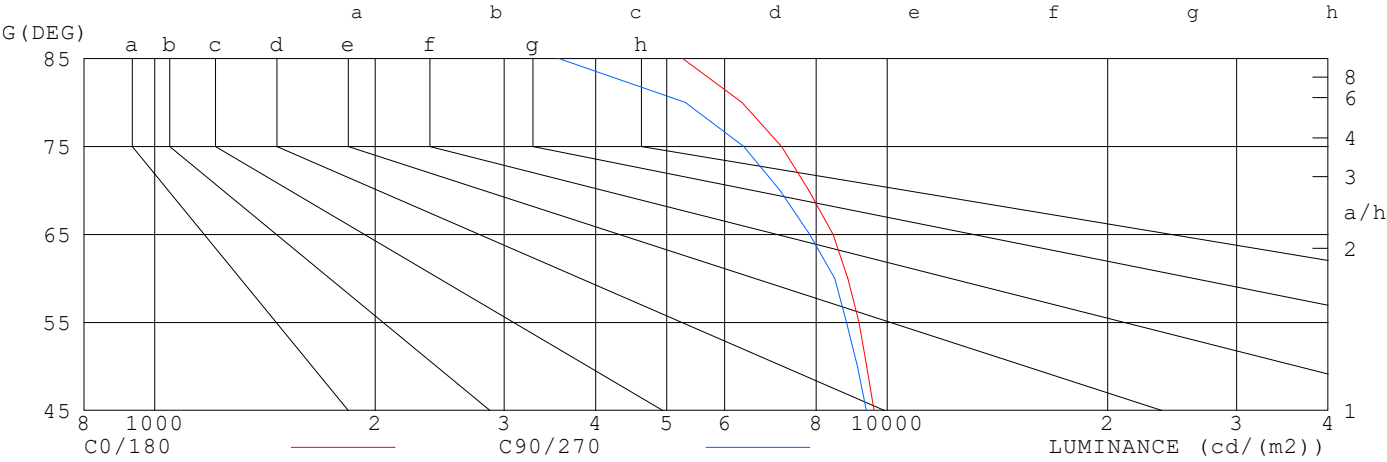

LUMINANCE cd/m2

G (DEG)	C0/180	C90/270
85	5260	3562
80	6335	5301
75	7176	6374
70	7821	7143
65	8437	7842
60	8841	8483
55	9159	8800
50	9378	9111
45	9603	9367


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:

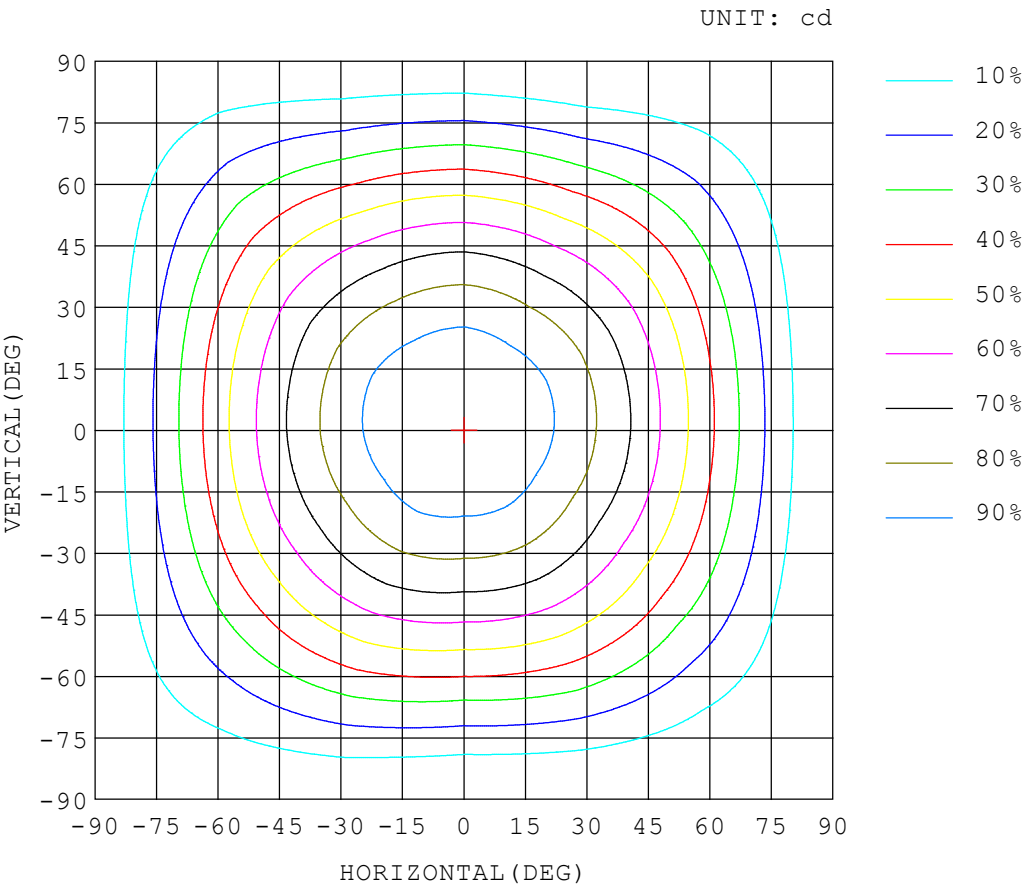


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

ISOLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:

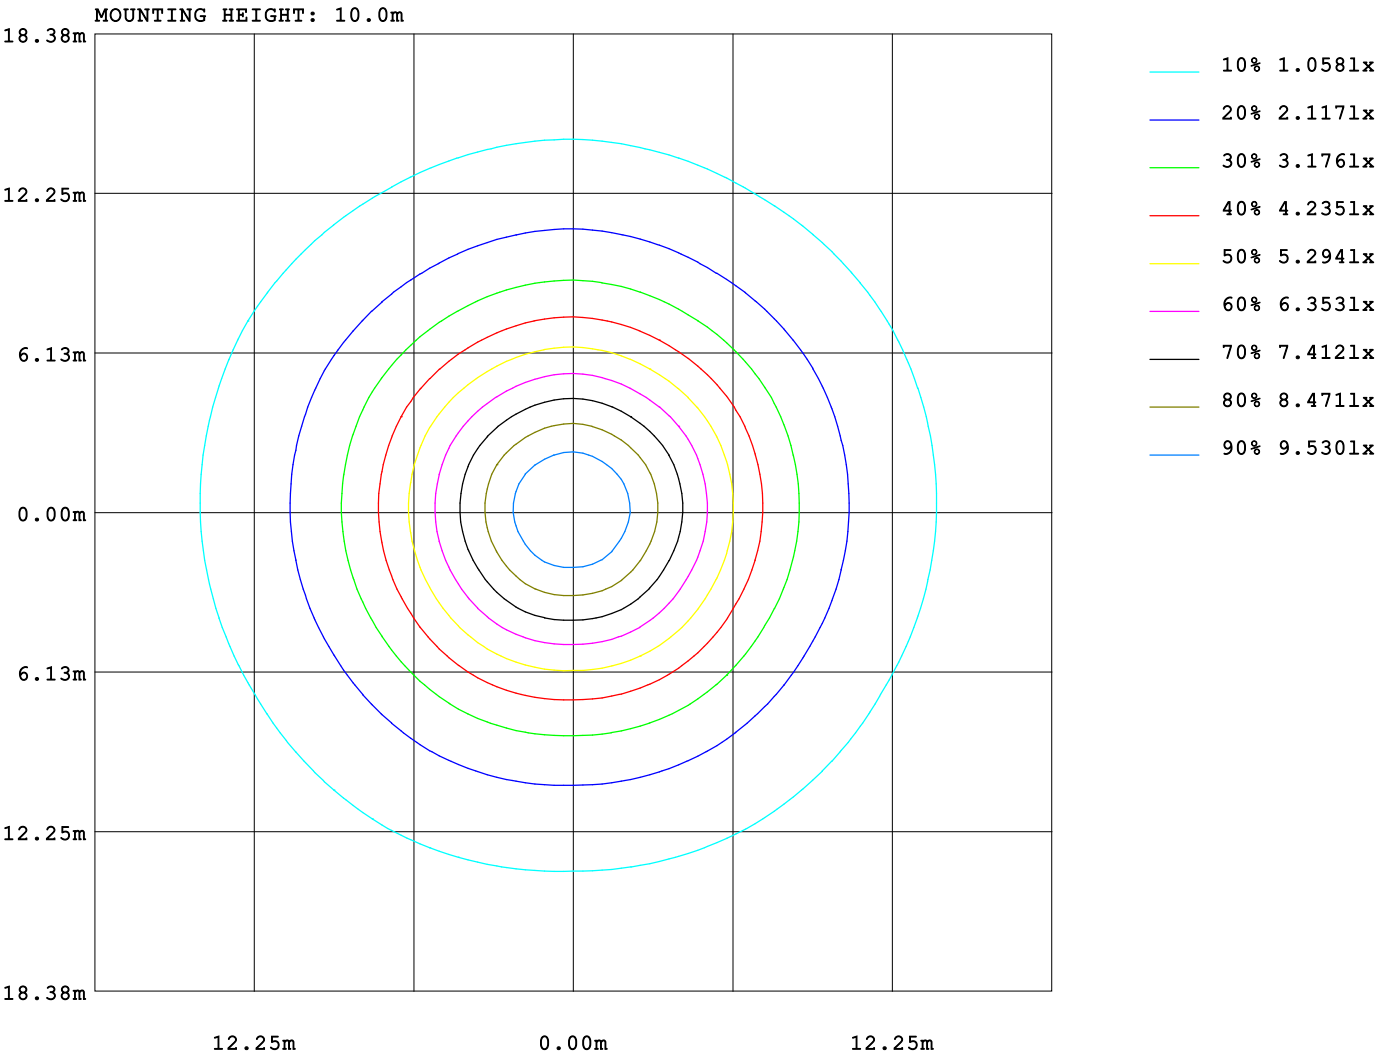

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

AREA LUMINOUS FLUX

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:

VERTICAL (DEG)	AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
	0.07	0.29	0.62	0.96	1.24	1.45	1.68	1.94	2.08	1.99	1.67	1.28	0.98	0.77	0.55	0.34	0.17	0.05	18.1	2.97		
90	0.11	0.55	1.34	2.39	3.43	4.41	5.34	6.18	6.66	6.52	5.77	4.71	3.68	2.70	1.72	0.87	0.32	0.07	56.8	52.1		
80	0.14	0.81	2.14	3.97	5.93	7.89	9.69	11.1	12.0	11.8	10.7	8.98	7.04	5.07	3.24	1.61	0.54	0.09	103	102		
70	0.17	1.08	2.91	5.57	8.48	11.3	13.8	15.9	17.0	16.8	15.4	13.1	10.5	7.59	4.70	2.36	0.78	0.10	148	147		
60	0.20	1.32	3.63	6.99	10.7	14.4	17.7	20.2	21.6	21.4	19.7	17.0	13.6	9.90	6.17	3.04	1.01	0.13	189	189		
50	0.23	1.53	4.25	8.16	12.6	17.1	21.0	23.9	25.6	25.4	23.4	20.3	16.3	11.8	7.40	3.65	1.22	0.15	224	224		
40	0.25	1.69	4.73	9.05	14.1	19.2	23.6	26.8	28.6	28.5	26.4	22.9	18.3	13.2	8.31	4.15	1.37	0.17	252	251		
30	0.26	1.80	5.04	9.64	15.0	20.5	25.4	28.9	30.7	30.6	28.4	24.7	19.7	14.1	8.91	4.48	1.48	0.18	270	270		
	0.27	1.84	5.19	9.90	15.4	21.0	26.1	29.9	31.8	31.6	29.4	25.4	20.2	14.6	9.18	4.63	1.53	0.18	279	278		
	0.27	1.83	5.14	9.81	15.2	20.8	25.8	29.6	31.5	31.4	29.1	25.1	20.0	14.4	9.09	4.58	1.52	0.18	276	276		
	0.26	1.75	4.90	9.37	14.5	19.8	24.6	28.3	30.2	30.0	27.8	23.9	19.0	13.7	8.65	4.34	1.44	0.17	263	263		
-30	0.24	1.62	4.50	8.61	13.3	18.2	22.7	26.1	27.7	27.5	25.6	22.0	17.4	12.5	7.88	3.93	1.31	0.16	242	242		
-40	0.22	1.43	3.93	7.58	11.7	16.1	20.1	23.0	24.2	24.1	22.5	19.4	15.3	10.9	6.80	3.38	1.13	0.14	212	212		
-50	0.19	1.21	3.26	6.27	9.86	13.5	16.8	19.1	20.1	19.9	18.6	16.1	12.7	9.00	5.46	2.73	0.92	0.12	176	176		
-60	0.16	0.96	2.53	4.77	7.61	10.5	13.1	14.7	15.3	15.2	14.3	12.4	9.74	6.76	4.04	2.02	0.67	0.09	135	134		
-70	0.13	0.69	1.75	3.29	5.16	7.14	8.86	9.88	10.2	10.0	9.49	8.27	6.43	4.43	2.62	1.27	0.43	0.08	90.2	88.1		
-80	0.10	0.44	1.00	1.82	2.85	3.90	4.73	5.13	5.18	5.05	4.78	4.17	3.24	2.19	1.23	0.59	0.24	0.06	46.7	38.9		
-90	0.07	0.22	0.40	0.63	0.94	1.25	1.44	1.44	1.33	1.25	1.22	1.11	0.89	0.59	0.35	0.23	0.14	0.04	13.5	0.00		
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90		
Φ t	3.33	21.1	57.3	109	169	229	283	323	342	340	315	272	216	155	96.3	48.2	16.2	2.16	2998			
Φ a	1.06	18.3	54.6	106	166	227	280	320	339	337	312	269	213	152	93.4	45.2	12.7	0.00		2944		

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, 301019

NAME: GENSIO 4 X 1 EDGELIT

TYPE: 3000K CRI-90


WEIGHT:

SPECIFICATION:

DIMENSION: 1200*295*15 MM

SERIAL No.:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

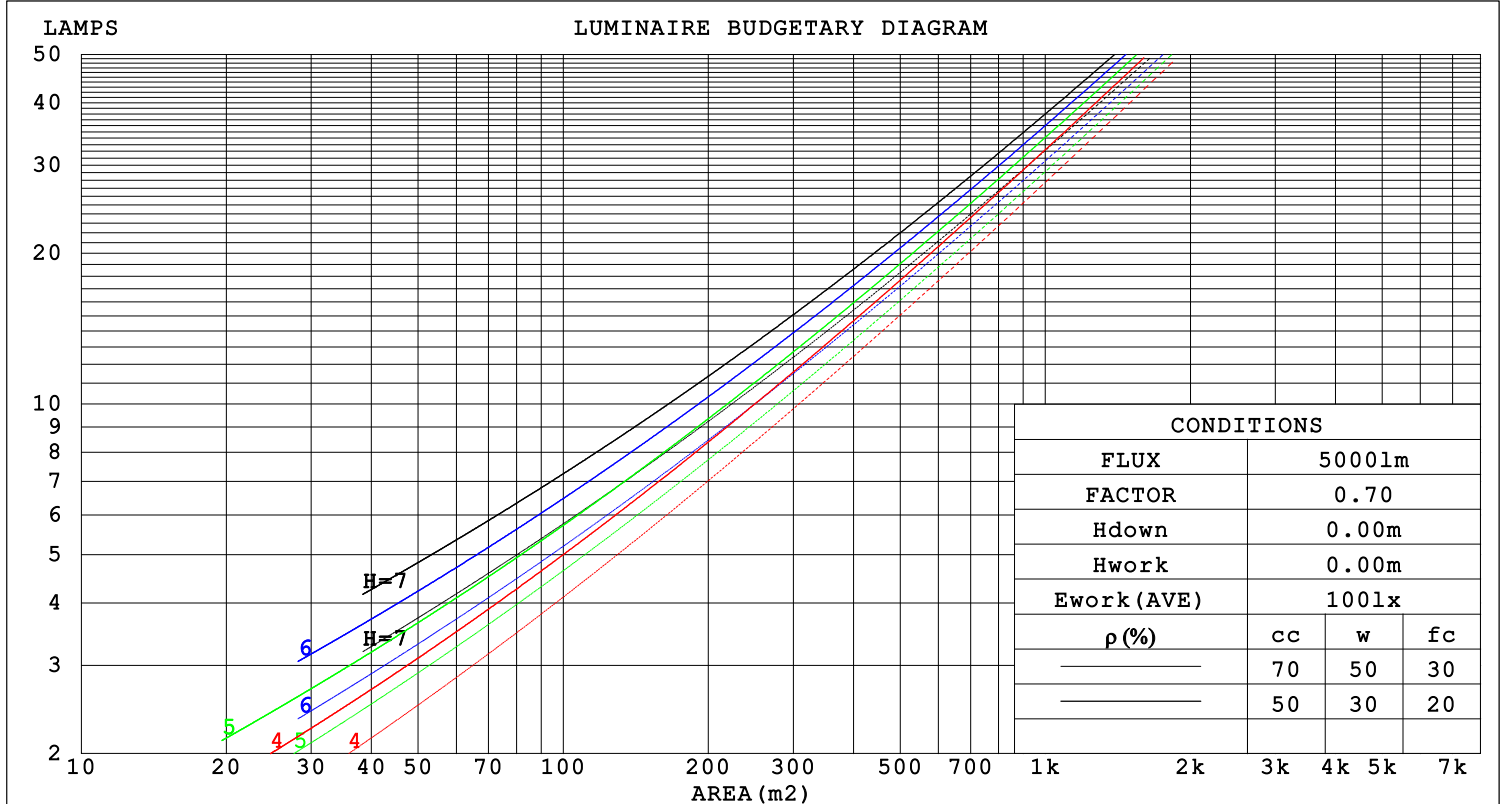

Test System: HOPOO HPG1800
 Temperature: 25.3 DEG
 Operators:
 Test Date: 06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 9.500 m
 Remarks: 3000K

WEC AND CCEC

Report number:

MANUFACTURER: DIVINITY LIGHTS														
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019														
NAME: GENSIO 4 X 1 EDGELIT								TYPE: 3000K CRI-90			WEIGHT:			
SPECIFICATION:								DIMENSION: 1200*295*15 MM			SERIAL No.:			

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.305	.174	.055	.292	.168	.054	.280	.161	.052	.269	.156	.050	
2.0	.293	.161	.049	.287	.158	.049	.275	.153	.048	.264	.148	.046	.254	.144	.045	
3.0	.271	.144	.043	.265	.142	.043	.255	.138	.042	.245	.134	.041	.236	.131	.041	
4.0	.250	.130	.038	.245	.128	.038	.236	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.231	.118	.034	.226	.116	.034	.218	.114	.033	.211	.111	.033	.204	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.199	.098	.028	.196	.097	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.172	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.171	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.078	.022	.161	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.134	.154	.134	.115	.106	.092	.080	.061	.053	.046	.019	.017	.015	
2.0	.172	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.114	.074	.141	.099	.064	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:9.500 m
 Remarks: 3000K

Uncorrected UGR Table

Report number:

MANUFACTURER: DIVINITY LIGHTS											
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019											
NAME: GENSIO 4 X 1 EDGELIT					TYPE: 3000K CRI-90			WEIGHT:			
SPECIFICATION:					DIMENSION: 1200*295*15 MM			SERIAL No.:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	20.2	21.8	20.5	22.0	22.2	20.2	21.8	20.5	22.0	22.2
	3H	21.6	23.1	21.9	23.3	23.5	21.6	23.0	21.9	23.2	23.4
	4H	22.2	23.5	22.5	23.8	24.0	22.0	23.4	22.4	23.6	23.9
	6H	22.5	23.8	22.9	24.1	24.4	22.3	23.6	22.7	23.9	24.1
	8H	22.6	23.8	22.9	24.1	24.4	22.3	23.5	22.7	23.8	24.1
	12H	22.6	23.8	23.0	24.1	24.4	22.3	23.5	22.7	23.8	24.1
4H	2H	20.8	22.1	21.1	22.4	22.6	20.8	22.1	21.1	22.4	22.6
	3H	22.3	23.5	22.7	23.8	24.1	22.3	23.5	22.7	23.8	24.1
	4H	23.0	24.1	23.4	24.4	24.7	22.9	24.0	23.3	24.3	24.6
	6H	23.4	24.4	23.8	24.7	25.1	23.3	24.2	23.7	24.6	25.0
	8H	23.5	24.4	23.9	24.7	25.1	23.3	24.2	23.7	24.6	25.0
	12H	23.5	24.4	24.0	24.7	25.2	23.3	24.2	23.8	24.5	24.9
8H	4H	23.2	24.1	23.6	24.4	24.8	23.1	24.0	23.5	24.4	24.7
	6H	23.7	24.4	24.1	24.8	25.2	23.6	24.3	24.0	24.7	25.1
	8H	23.8	24.4	24.2	24.8	25.3	23.6	24.3	24.1	24.7	25.2
	12H	23.9	24.4	24.3	24.9	25.4	23.7	24.3	24.2	24.7	25.2
12H	4H	23.2	24.0	23.6	24.4	24.8	23.1	23.9	23.5	24.3	24.7
	6H	23.7	24.3	24.1	24.7	25.2	23.6	24.2	24.0	24.7	25.1
	8H	23.8	24.3	24.2	24.8	25.3	23.7	24.2	24.1	24.7	25.2
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.1 / - 0.3					+ 0.2 / - 0.4				
2.0H		+ 0.3 / - 0.4					+ 0.3 / - 0.5				

CIE Pub.117 Corrected 2998 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.8)

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

UTILIZATION FACTORS TABLE

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	56	45	39	32
0.80	68	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	49
1.25	83	72	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:9.500 m
 Remarks: 3000K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:

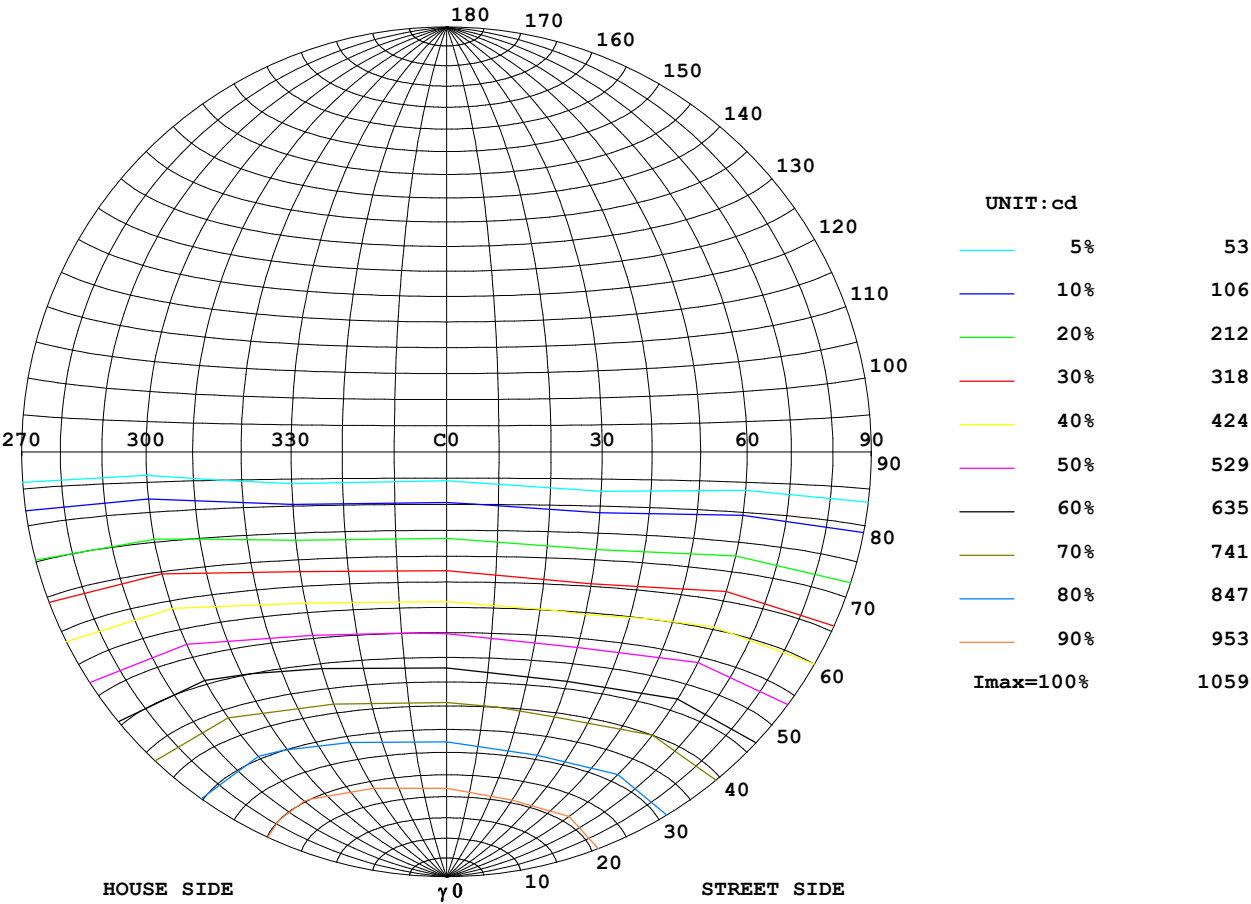

Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025



Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

ISOLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:

ILLUMINANCE AT MH=10 m,Enadir = 10.59 lx

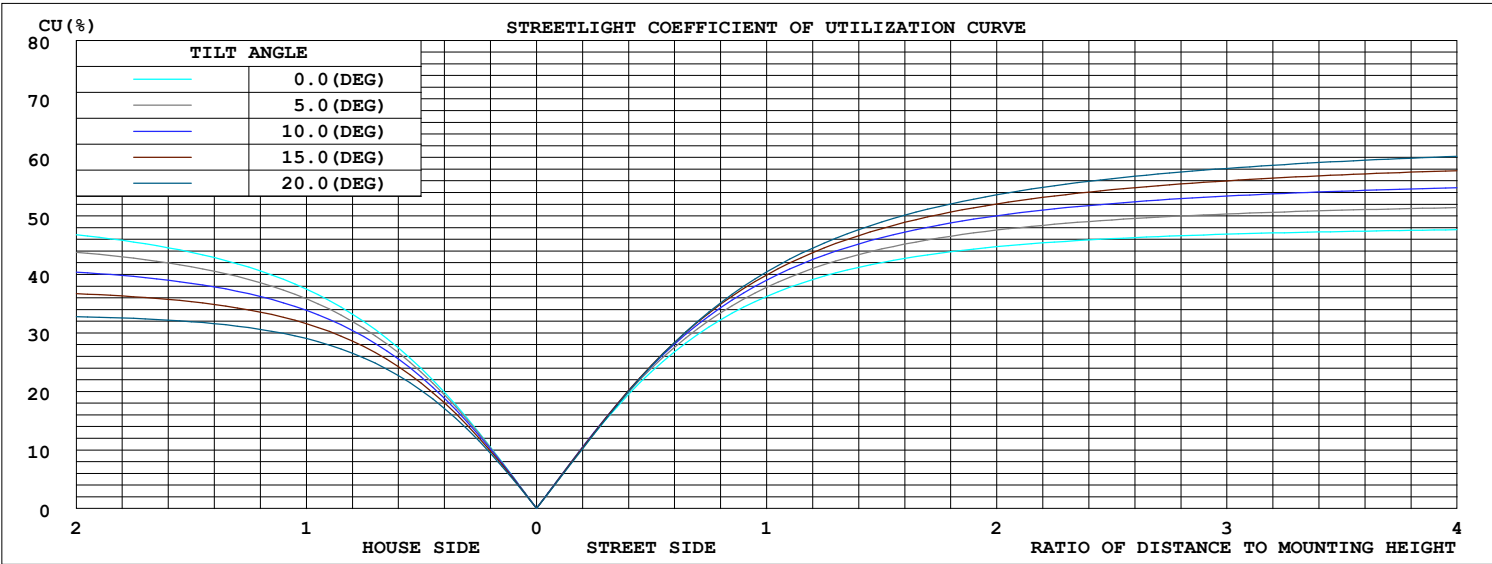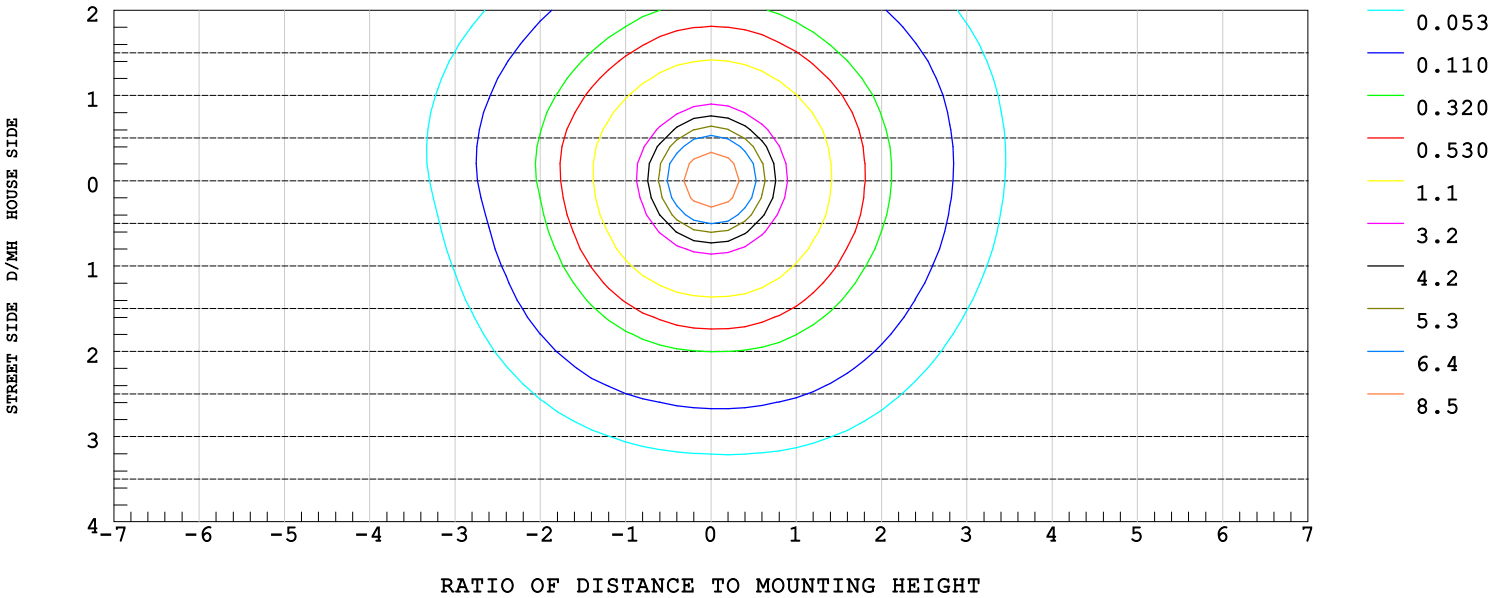


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:

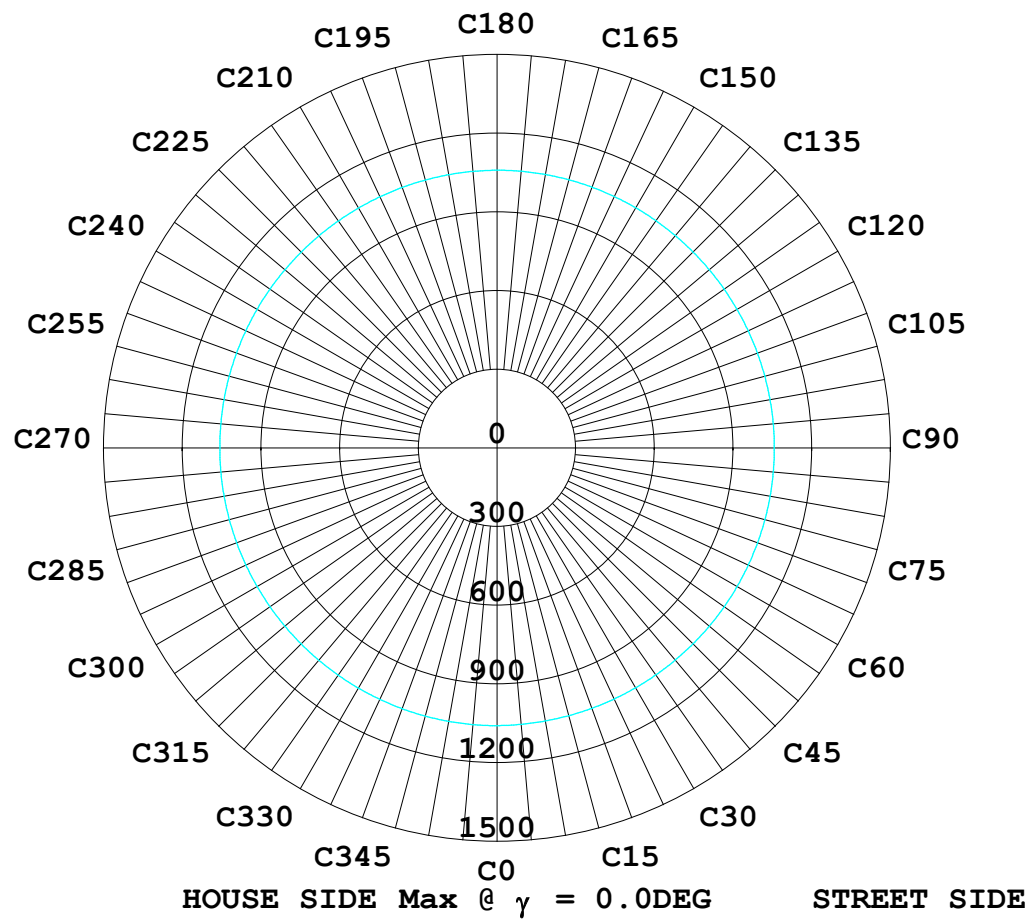

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi,301019		
NAME: GENSIO 4 X 1 EDGELIT	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION:	DIMENSION: 1200*295*15 MM	SERIAL No.:

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330
0.0	1059	1056	1057	1057	1057	1058	1059	1056	1057	1057	1057	1058
5.0	1051	1047	1048	1047	1051	1052	1056	1056	1055	1055	1052	1053
10.0	1035	1026	1029	1028	1036	1036	1044	1048	1044	1045	1039	1038
15.0	1007	996	1001	1000	1010	1012	1021	1028	1024	1024	1015	1014
20.0	969	958	963	962	976	977	990	1000	992	993	982	981
25.0	927	911	920	915	933	933	950	962	952	955	939	939
30.0	875	858	865	862	882	885	903	915	904	907	889	889
35.0	814	797	805	801	824	826	848	862	851	853	832	832
40.0	751	729	741	733	760	762	785	801	787	788	766	767
45.0	679	657	668	662	691	694	717	736	718	721	696	699
50.0	603	581	592	586	615	619	645	663	644	646	620	624
55.0	525	500	514	505	538	540	566	586	564	567	539	544
60.0	442	417	430	424	456	460	484	505	482	486	454	462
65.0	357	325	347	331	372	375	401	421	398	401	370	376
70.0	268	241	256	244	279	284	309	335	304	311	275	280
75.0	186	163	173	165	198	203	225	245	215	220	188	203
80.0	110	86.7	98.1	92.0	121	125	148	163	135	137	110	121
85.0	45.8	24.1	36.0	31.0	54.3	54.8	76.8	85.6	62.3	65.2	41.0	48.3
90.0	14.9	9.65	14.7	9.29	14.9	9.29	21.2	21.1	8.84	10.8	3.97	10.0

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:06-02-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:9.500 m
Remarks: 3000K