

GLG MACTY



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Diffuser with Dark Reflector


L70 @50,000h

Aluminium Die-cast

Type

Pendent

Single Line Diagram

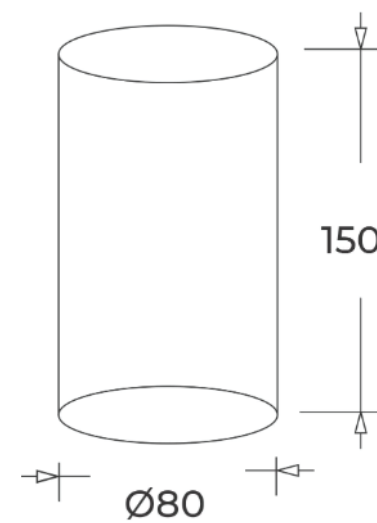

GLG MACTY


GLG Macty fixture has:

- Die cast- aluminium Luminaire housing
- Die cast heat sink
- Premium powder coated finish
- COB (Chip on Board) technology
- LED with effective colour rendering
- Lens with dark reflector optics
- Source is deep recessed into the fixture
- Efficient COB & reflector for light distribution
- Light appears to pool on a surface below without any discernible source
- Vivid & accurate lighting effect
- Suitable for retail, hospitality & residential application

Light Distribution



DIRECT



CRI ≥ 90



TUNABLE WHITE

GLG MACTY



GLG MACTY

System Power	Dimension
12W	Dia- 80mm Height- 150mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

15°

24°

35°

55°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Pendant

Material Colour

RAL As Per Request