





GLOWNEST SM





GLOWNEST SM

Glownest SM Downlight features has:

- Luminaire housing of die cast aluminium
- Surface spotlight with effortless installation
- Premium powder coated finish
- Optical PC reflector
- Technology for maximum efficiency
- Zero multiple shadows
- LED with effective colour rendering
- Overflowing colours with soft light and shadow
- Interpretation of the real environment light and colours
- High colour rendering

Quick Info

CRI \geq 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6, DALI-2 DT8, DALI+

SDCM<3

Reflector


L70 @50,000h

Types



Surface

Single Line Diagram

GLOWNEST SM 4 HEAD

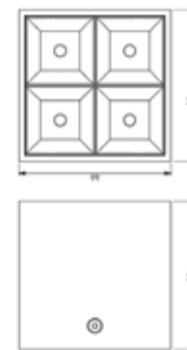

GLOWNEST SM 9 HEAD

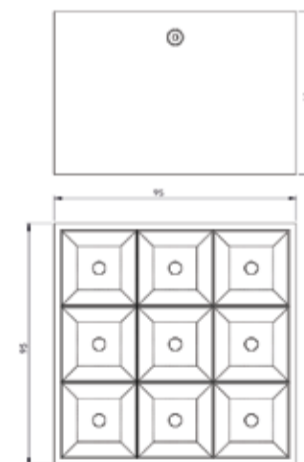

CRI \geq 90



TUNABLE
WHITE

GLOWNEST SM



GLOWNEST SM 4 HEAD

System Power	Dimension
6W	LXW- 66X66mm, Height- 64mm

GLOWNEST SM 9 HEAD

System Power	Dimension
15W	LXW- 95X95mm, Height- 64mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

WallWasher

Flood 40°

Flood 60°

Square 55°X55°

Rectangular 40°X65°

12°

34°

48°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Surface

Material Colour

RAL As Per Request