

GOTHIC-85 FLOOD LIGHT

Spike | Mounted



GOTHIC-85 FLOOD LIGHT is a compact outdoor LED flood luminaire in a round aluminium housing with a premium powder-coated finish.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 80 , the luminaire maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring long-term performance and reliability. The integrated Clear Tempered Glass optic delivers a precise beam 8°/ 12°/ 20° and 30° options for uniform illumination and reduced glare.

With a compact size of 85mm Dia, 128mm length, and 344mm height with spike, this fixture is crafted for direct light distribution, making it ideal for professional application.

Customisations in RAL finish, wattages, and Length available as per request to enhance installation and functionality.

Single Line Diagram

Spike Mounted

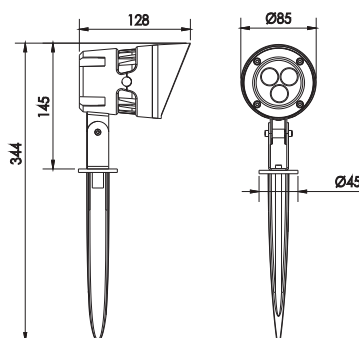

GOTHIC - 108 FLOOD LIGHT



Quick Info

Mounting Type

Spike (available opt- Surface & Clamp Mounting)

Material Colour

Customize RAL available

Protection mode

IP66

Driver Details

Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K/ 3000K/ 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

8°/ 12°/ 20°/ 30°

Optics

Clear Tempered Glass

Efficacy

2700K- - 85.3lm/W

3000K- 90.7lm/W

4000K- 95.7lm/W

Electrical

Wattage - 10W

Input Voltage- 240V AC

Physical Dimensions

Dia- 85mm

Length - 128mm

With Spike Height- 344mm