
GROOT-3°
SPIKE LIGHT

Direct | Spike

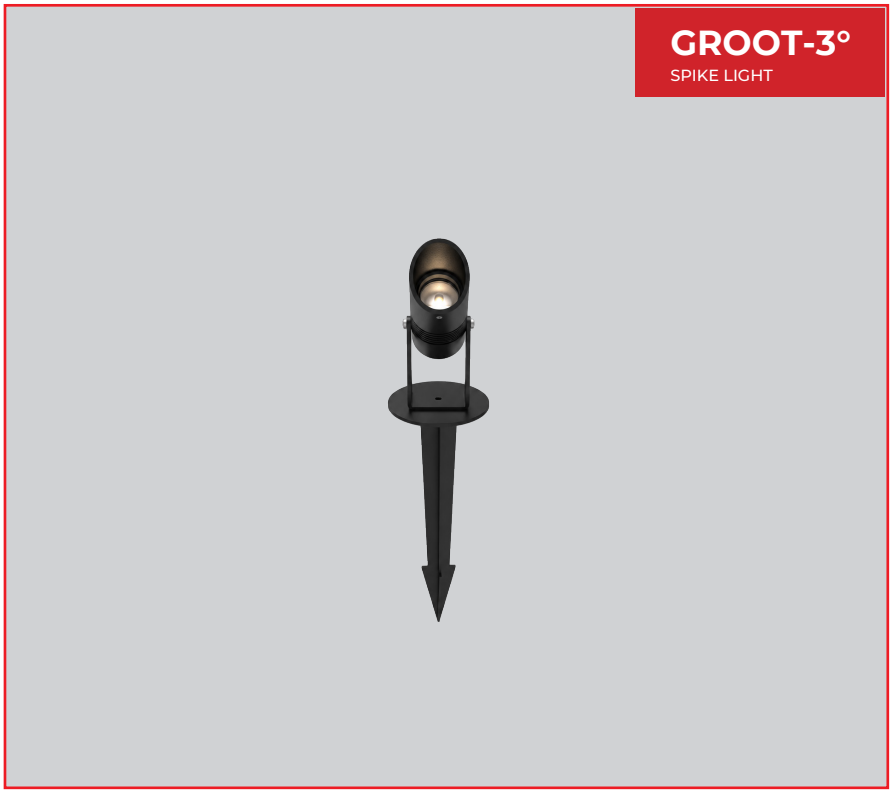


GROOT-3° SPIKE LIGHT is a robust and versatile outdoor lighting solution designed with a die-cast aluminium housing for durability and efficient thermal management. It features an innovative proprietary-designed bracket that provides flexible aiming without additional attachments, making it suitable for architectural, landscape and outdoor illumination. The fixture offers IP66 protection against dust and moisture and is available with multiple beam-angle options for precise light distribution.

Divinity Lights provides customized lighting solutions according to clients' specific requirements, offering suitable configurations for landscape lighting, tree uplighting, gardens, pathways, façades, architectural features, resorts, hotels and outdoor commercial spaces.

The GROOT-3° can be mounted on a suitable surface or bracket to create focused and controlled illumination for both functional and decorative applications.

Single Line Diagram

Spike Mounted

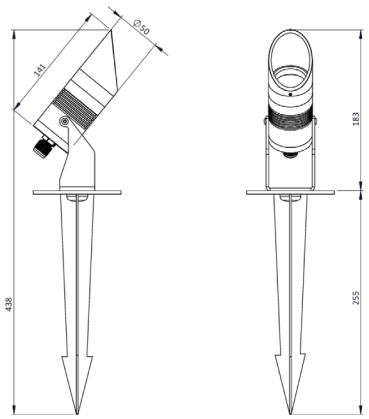

GROOT-3° SPIKE LIGHT

INPUT VOLTAGE 220-240V AC | IP66 | CRI >80

Quick Info

Mounting Type
Spike

Material Colour
Customize RAL available

Protection mode
IP66

Driver Details
Non-Dimmable/ Dali-Dimmable/ DMX Controller

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED
CCT- 2700K, 3000K, 4000K, RGB, RGBW

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle
20°/ 30°/ 40°/ 55°

Optics
Lens With Tempered Glass

Efficacy
70lm/W

Electrical
Wattage - 10W

Input Voltage- 220-240V AC

Physical Dimensions
Dia- 50mm

Fixture Height- 141mm

Overall Height- 438mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com