GROOT
SPIKE LIGHT



divinity lights



divinity lights









GROOT SPIKE LIGHT

Groot Spike light has :

- Luminaire housing of Die-Cast Aluminium
- 15°/ 26°/ 36°/ 50°/ 60° beam options for all applications
- IP66, High Ingress Protection against dust & Moisture
- Innovative proprietary designed bracket without any attachment
- Energy-efficient LED with high colour rendering
- Extremely robust construction, precise optics and beautiful form factor

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K, RGB, RGBW

70 lm/W

Dali Dimmable, Non Dimmable

DMX Controller

SDCM<3

Lens with Tempered Glass


L70 @50,000h


Aluminium Die-Cast

Types

Spike

Single Line Diagram

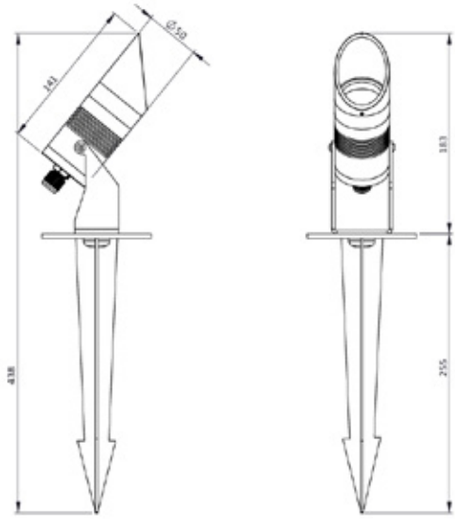



CRI ≥ 80

divinity lights

GROOT SPIKE LIGHT



System Power	Dimensions
5W	Dia= 50mm, Fixture Height= 141mm Overall Height- 438mm

Order Options

CCT (Colour Temperature)

2700K

3000K

4000K

RGB

RGBW

CRI

>80

Beam Angle

20°

30°

40°

55°

Control

Non Dimmable

Dali Dimmable

DMX Controller

Mounting Type

Spike

Material Colour

RAL as per request