


**HELIO UP &
DOWN RING**

divinity lights

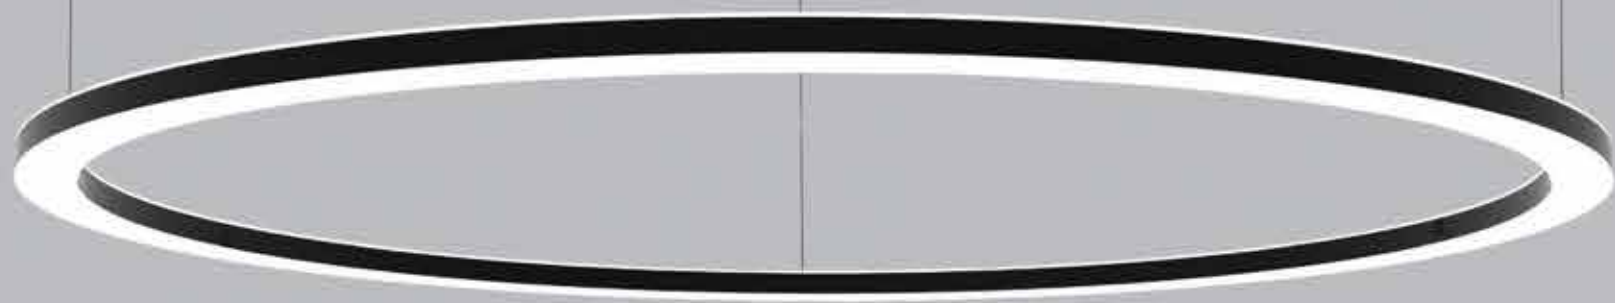

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

PMMA Diffuser


L70 @50,000h

Aluminium

Types

Pendant

Single Line Diagram

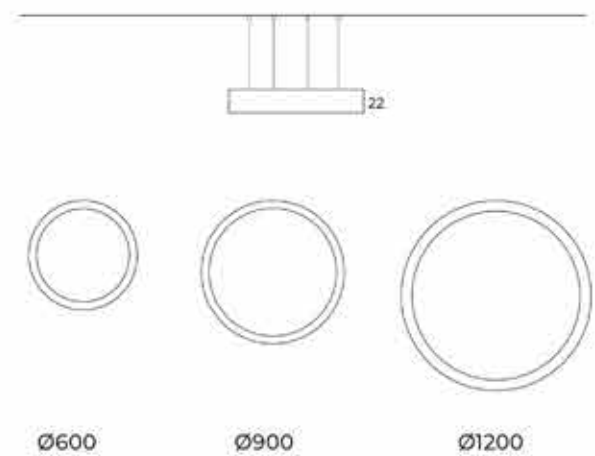

HELIO UP & DOWN RING

Helio Up & Down Ring has :

- Elegant Helio ring with 22mm height
- Aluminium luminaire Housing
- Premium Finish Powder coating
- High efficiency PMMA diffuser
- Direct & indirect illumination with visual comfort
- Additional emphasis on the ceiling
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Pendant using suspension cable with M6 bolt and fastener
- Easy maintenance

Colours



Light Distribution

Direct-Indirect



CRI ≥ 90



TUNABLE
WHITE

HELIO UP & DOWN RING



HELIO UP & DOWN RING

Product Order Code	System Power	Dimension
3009-  1	30W	Ø = 600mm, H = 22mm, Profile Thickness = 13mm
3009-  2	50W	Ø = 900mm, H = 22mm, Profile Thickness = 13mm
3009-  3	70W	Ø = 1200mm, H = 22mm, Profile Thickness = 13mm

Order Options

Distribution ▼

Direct-Indirect	2
Up-50% / Down-50%	3
Up-30% / Down-70%	4
Up-70% / Down-30%	5
Up-20% / Down-80%	6
Up-80% / Down-20%	

CCT (Colour Temperature) ●

3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K 	4

CRI ●

>90	1
-----	---

Beam Angle

110°

Control ■

ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Mounting Type

Pendant

Material Colour ○

Black		1
White		2
Grey		3

Accessories

Product Order Code	Accessories Name	Accessories Image
3009-01 	LED PCB	
3009-02	Suspension Wire	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1