

HERCULES



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6, DALI-2 DT8, DALI+

SDCM<3

Lens with Honeycomb Louver


L70 @50,000h

Types


Recessed

Single Line Diagram



HERCULES 40

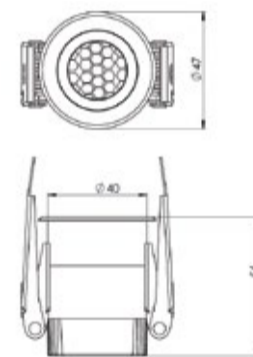

HERCULES 52

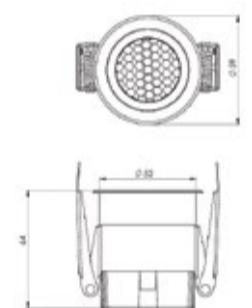

HERCULES 68

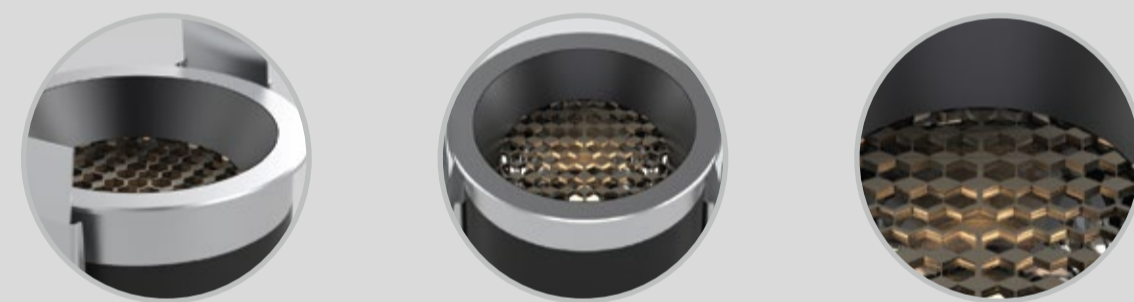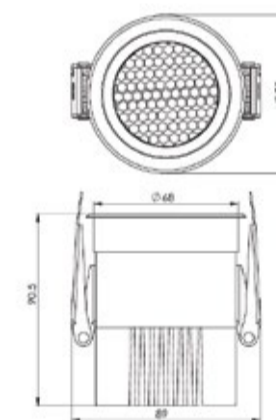


HERCULES DOWNLIGHT

Hercules Downlight features has:

- Die cast- aluminium Luminaire housing
- Premium powder coated finish
- COB (Chip on Board) technology
- Lens with honeycomb louver
- Available in Fixed version
- LED with effective colour rendering
- Provides comfortable illumination with reduced eye strain, ideal for premium interiors.
- Delivers focused and controlled light distribution for accent
- Ensures excellent lumen output with low energy consumption.

Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

HERCULES DOWNLIGHT



HERCULES 40

System Power	Dimension
5W	Outer Dia- 47mm, Cutout Dia- 40mm, Height- 56mm

HERCULES 52

System Power	Dimension
10W	Outer Dia- 59mm, Cutout Dia- 52mm, Height- 64mm

HERCULES 68

System Power	Dimension
15W	Outer Dia- 89mm, Cutout Dia- 68mm, Height- 90.5mm

Order Options

CCT (Colour Temperature)

- 3000K
- 4000K
- 5700K
- Tunable White 2700K-6500K



CRI

>90

Beam Angle

- 10°
- 15°
- 24°
- 36°
- 50°

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI+



Mounting

Recessed

Reflector Colour

- Black
- White
- Gold
- Rose Gold

Material Colour

RAL As Per Request