HUSTLER-1
FLOOD LIGHT

Direct | Surface



HUSTLER-1 Flood Light is a compact outdoor LED flood luminaire in a robust aluminium housing with a premium powder-coated finish.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 80, the luminaire maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring long-term performance and reliability. The integrated lens with tempered glass optic delivers precise beam distribution with 10°, 26°, 36°, 45°, and 55° beam angle options for controlled illumination and reduced glare. Mono versions with an efficacy of up to 80 lm/W and RGBW versions with an efficacy of up to 70 lm/W are available.

With a compact size of 335mm width, 365mm height, and 54.5mm overall depth, this IP65-rated fixture is crafted for direct surface-mounted light distribution, making it ideal for landscape, façade, architectural, and outdoor highlighting applications.

Customisations in RAL finish, CCT (2700K–4000K), wattage, and control options including DALI and non-dimmable versions are available upon request to enhance installation and performance flexibility.

Single Line Diagram

Surface Mounted

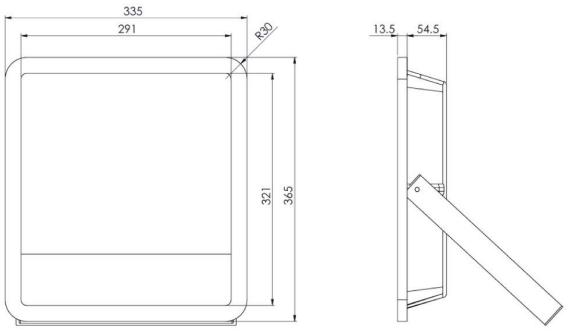

HUSTLER-1 FLOOD LIGHT



Quick Info

Mounting Type
Surface Mounted

Material Colour
Customize RAL avilable

Protection mode
IP65

Driver Details
Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED
CCT- 2700K/ 3000K/ 4000K/ RGBW

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle
10°/ 26°/ 36°/ 45°/ 55°

Optics
Lens with Tempered Glass

Efficacy
80lm/W

Electrical
Wattage - 200W

Input Voltage- 240V AC

Physical Dimensions
Width- 335mm

Height- 365mm

Overall Depth- 54.5mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com