

Quick Info

CRI $\geq 80/90$

2700K, 3000K, 4000K

Up to 80 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM ≤ 3

Tempered Glass



L70 @50,000h

Aluminium Die-Cast


Types

Surface

Single Line Diagram

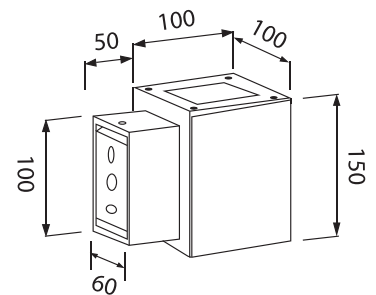

Light Distribution



CRI $\geq 80/90$

HORIZON-S WALL LIGHT



HORIZON-S WALL LIGHT DIRECT

Product Order Code	System Power	Dimensions
1760	5W	LXW=100mm H=100mm
1761	10W	LXW=100mm H=150mm

HORIZON-S WALL LIGHT DIRECT-INDIRECT

Product Order Code	System Power	Dimensions
1762	2x5W	LXW=100mm H=100mm
1763	2x10W	LXW=100mm H=150mm

Order Options

CCT (Colour Temperature)

2700K

3000K

4000K

CRI

>80

>90

Beam Angle

12°

24°

36°

60°

Control

Non-Dimmable



Dali-Dimmable



Mounting Type

Surface

Material Colour

Grey

