


IKON-R
STEP LIGHT

divinitylights





IKON-R

Ikön-R Step light has :

- Luminaire housing of Die-Cast Aluminium
- IP65, High Ingress Protection against dust & moisture
- Extremely sustainable and requires little maintenance
- Lens optics for even light distribution
- Energy-efficient LED with high colour rendering
- Provides soft downward illumination to the desired walkway
- Versatile for use as a step, path, plinth or hallway lighting solution
- Edge lighting that adds sleek sophistication to contemporary and modern staircases

Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Glass


L70 @50,000h

Aluminium Die-Cast

Types


Recessed

Single Line Diagram

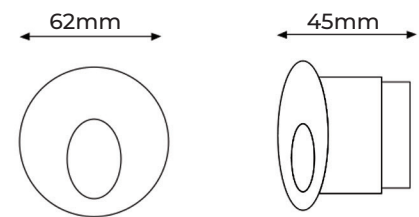

Light Distribution

Direct



CRI ≥ 90

IKON-R



Product Order Code	System Power	Dimensions
1789	3W	Dia=62mm, H=45mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>90

Beam Angle

60°

Control

Non-Dimmable
Dali-Dimmable



Mounting Type

Recessed

Material Colour

Black
Grey

