



**IKON-S**  
STEP LIGHT

divinitylights

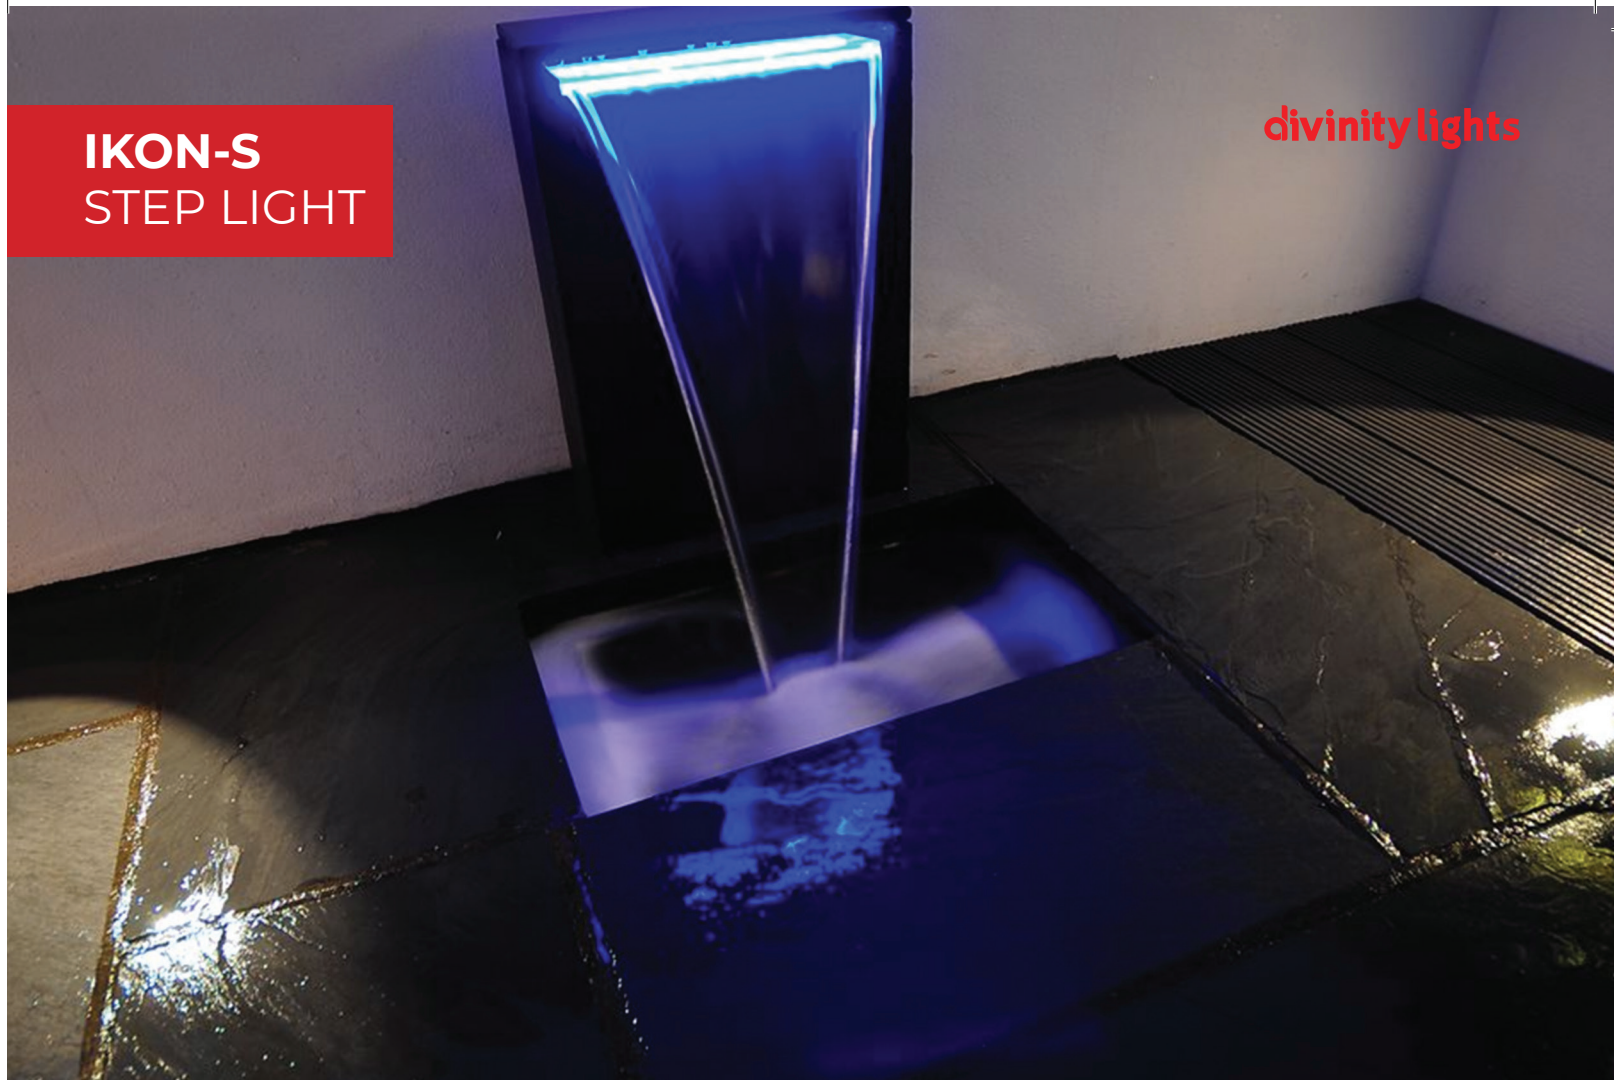

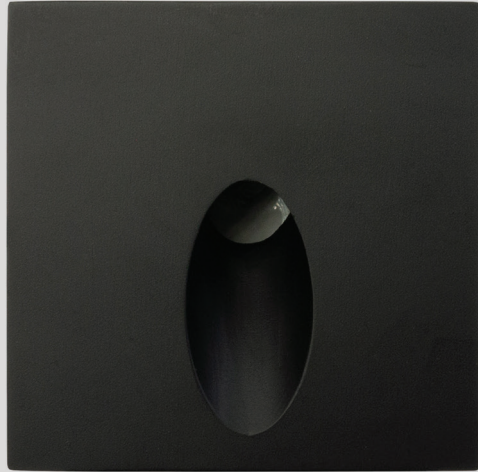

### Quick Info

CRI  $\geq 90$

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Glass



L70 @50,000h

Aluminium Die-Cast

### Types

Recessed

### Single Line Diagram

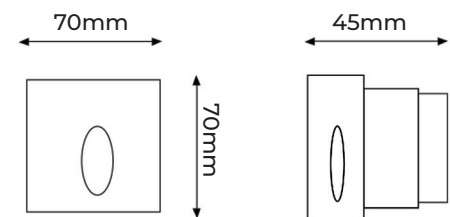


## IKON-S

Ikön-S Step light has :

- Luminaire housing of Die-Cast Aluminium
- IP65, High Ingress Protection against dust & moisture
- Extremely sustainable and requires little maintenance
- Lens optics for even light distribution
- Energy-efficient LED with high colour rendering
- Provides soft downward illumination to the desired walkway
- Versatile for use as a step, path, plinth or hallway lighting solution
- Edge lighting that adds sleek sophistication to contemporary and modern staircases

### Light Distribution

Direct



CRI  $\geq 90$

IKON-S



Product Order Code	System Power	Dimensions
1790	3W	L=70mm, W=70mm H=45mm

Order Options

CCT (Colour Temperature)

2700K  
3000K  
4000K

CRI

>90

Beam Angle

60°

Control

Non-Dimmable  
Dali-Dimmable



Mounting Type

Recessed

Material Colour

Black  
Grey

