



## IKON-R

IKON-R Step light has :

- Luminaire housing of Die-Cast Aluminium
- IP65, High Ingress Protection against dust & moisture
- Extremely sustainable and requires little maintenance
- Lens optics for even light distribution
- Energy-efficient LED with high colour rendering
- Provides soft downward illumination to the desired walkway
- Versatile for use as a step, path, plinth or hallway lighting solution
- Edge lighting that adds sleek sophistication to contemporary and modern staircases

### Quick Info

CRI  $\geq 80/90$

2700K, 3000K, 4000K

Up to 15 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM $\leq 3$

Clear Glass


L70 @50,000h

Aluminium Die-Cast

### Types


Recessed

### Single Line Diagram

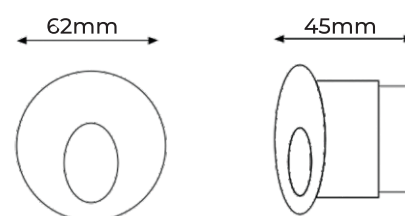

### Light Distribution

Direct



CRI  $\geq 80/90$

## IKON-R



Product Order Code	System Power	Dimensions
1789	3W	Dia=62mm, H=45mm

## Order Options

## CCT (Colour Temperature)

2700K

3000K

4000K

## CRI

&gt;80

&gt;90

## Beam Angle

60°

## Control

Non-Dimmable



Dali-Dimmable



## Mounting Type

Recessed

## Material Colour

Black



Grey

