

divinity lights

LUMINA BLOOM


LUMINA BLOOM SERIES

LUMINA BLOOM CURVED PENDANT



The louvre is no longer an accessory but an integral part of the optics itself. The result is perfectly within all parameters of comfort and correct perception, it even achieves a $UGR < 16$ but does so effortlessly through light itself, in the active collaboration of the elements.

The resulting emission is a soft, comfortable light that opens up into the space with a controlled beam of $2 \times 31^\circ$. The optical element, crafted from a singular material, embodies sustainable industrial intelligence in its design. It reduces material diversity, minimises weight, and simplifies production steps.

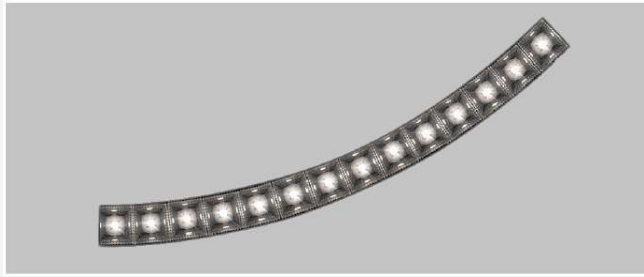

CURVED MODULE 45°

DIMENSIONS

L=Custom, W=30mm, H=32mm

WATTAGE

4W - 8W

CCT


3000K / 4000K / TUNABLE

CRI

> 80 / 90 / 95

MATERIAL & FINISH

ALUMINIUM WITH SILVER FINISH

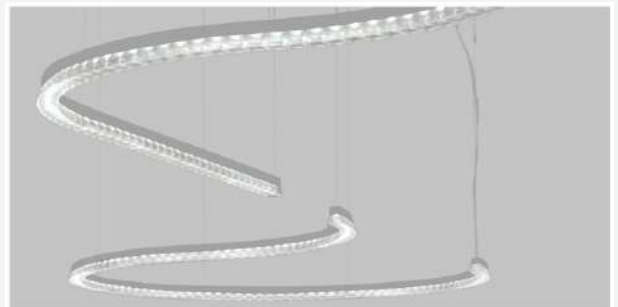



LUMINA BLOOM CURVE PENDANT

- Lumina bloom curve pendant sleek and slim curve fixture has:
- Luminaire housing of extruded aluminium.
- No visible screw.
- Snap-fit system.
- LED PCB mounted on insert design with heat sink.
- Bottom opening for easy maintenance.
- Pendant with cable suspension.
- M6 bolt for M6 fastener.
- Energy-efficient LED.

Quick Info

CRI ≥ 80/90/95

3000K/4000K Tunable White

Up to 100lm/W

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2/DALI-2 DT8/D4i/DALI +

POE (Power Over Ethernet)

SDCM<3


ALUMINIUM WITH SILVER FINISH

Types

Pendant

Single Line Diagram

Pendant

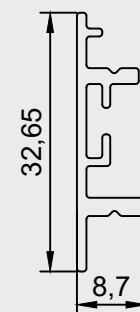


Colours




Light distribution

Direct



CRI ≥ 80/ 90/ 95



TUNABLE
WHITE

LUMINA BLOOM CURVE PENDANT




LUMINA BLOOM CURVE PENDANT



Product Order Code	System Power	Dimensions
9602- 	4W - 8W	L = Custom W = 30mm H = 32mm


Order Options

Distribution

Direct-Indirect









Lumen Type	
Low	1
High	2


CCT (Colour Temperature)	
3000K	1
4000K	2
Tunable White 3000k-4000k 	3





CRI	
>80	1
>90	2
>95	3

Beam Angle







110°

Control	
ON-OFF 	1
ON-OFF (FLICKER FREE) 	2
DALI-2 	3
DALI-2 DT8 	4
DALI + 	5
D4i 	6
POE (Power Over Ethernet) 	7









Mounting Type	
Pendant	1



Material Colour	
Black 	1
White 	2
Grey 	3

Accessories

Product Order Code	Accessories Name	Accessories Image
9602-01 	LED PCB	
9602-02	Suspension Wire	
9602-03	Profile Connector	
9602-04 	Profile Endcap	

Order Options

Lumen Type	
Low	1
High	2
CCT (Colour Temperature)	
3000K	1
4000K	2
Tunable White 3000k-4000k 	3
CRI	
>80	1
>90	2
>95	3
Material Colour	
Black	 1
White	 2
Grey	 3

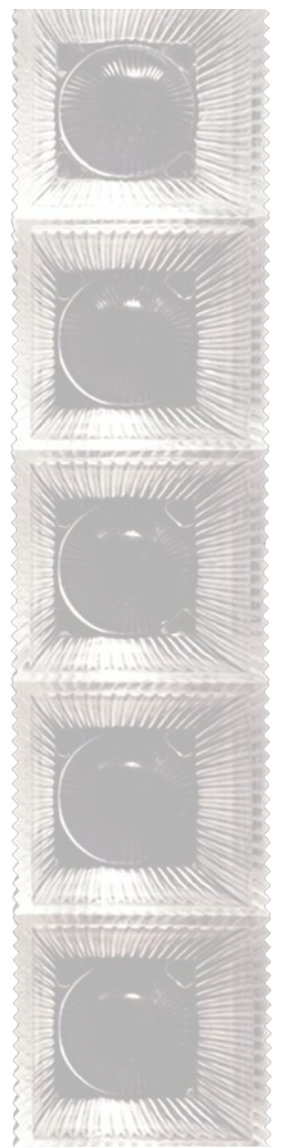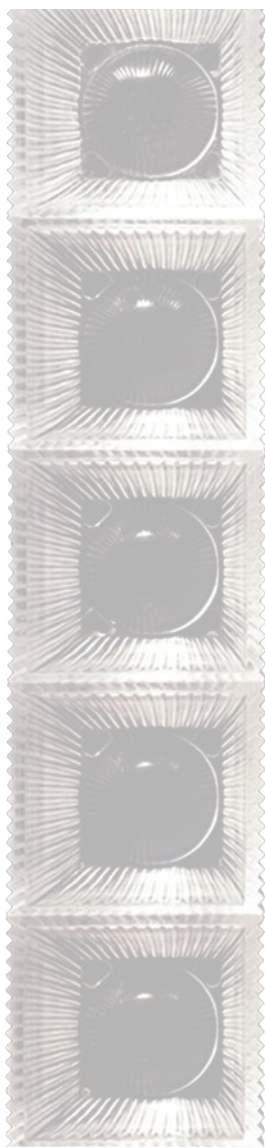

LUMINA BLOOM CURVED PENDANT