LANTERN
BOLLARD

divinity lights





divinity lights









LANTERN BOLLARD

Lantern Bollard fixture has :

· Luminaire housing of Aluminium

· IP66, High Ingress Protection against dust & moisture

· Flicker free operation for eye protection

· Energy-efficient LED with high colour rendering

· The built quality ensures long and maintenance free service life

· Optimum for every outdoor space including society parks, streets, educational institutes, and pathways

· Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort

· Designed to provide radially symmetric light emission of 360°

· Sustainable LED technology offers durability and optimal light output with low power consumption

Quick Info

CRI ≥80

2700K, 3000K, 4000K

Non-Dimmable, Dali Dimmable

SDCM<3

Plexi Glass


L70 @50,000h


Aluminium Die-Cast

Type

Surface


Single Line Diagram

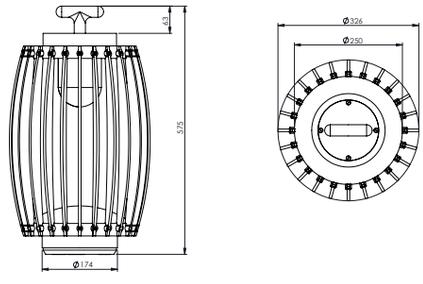



CRI ≥ 80

LANTERN BOLLARD



System Power	Dimensions
10W	Dia= 326mm Base Dia= 174mm H= 575mm

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

CRI

>80

Beam Angle

360°

Control

Non-Dimmable

Dali Dimmable

Mounting Type

Surface Mounted

Material Color

Ral As Per Request