


LIFX TRIMLESS

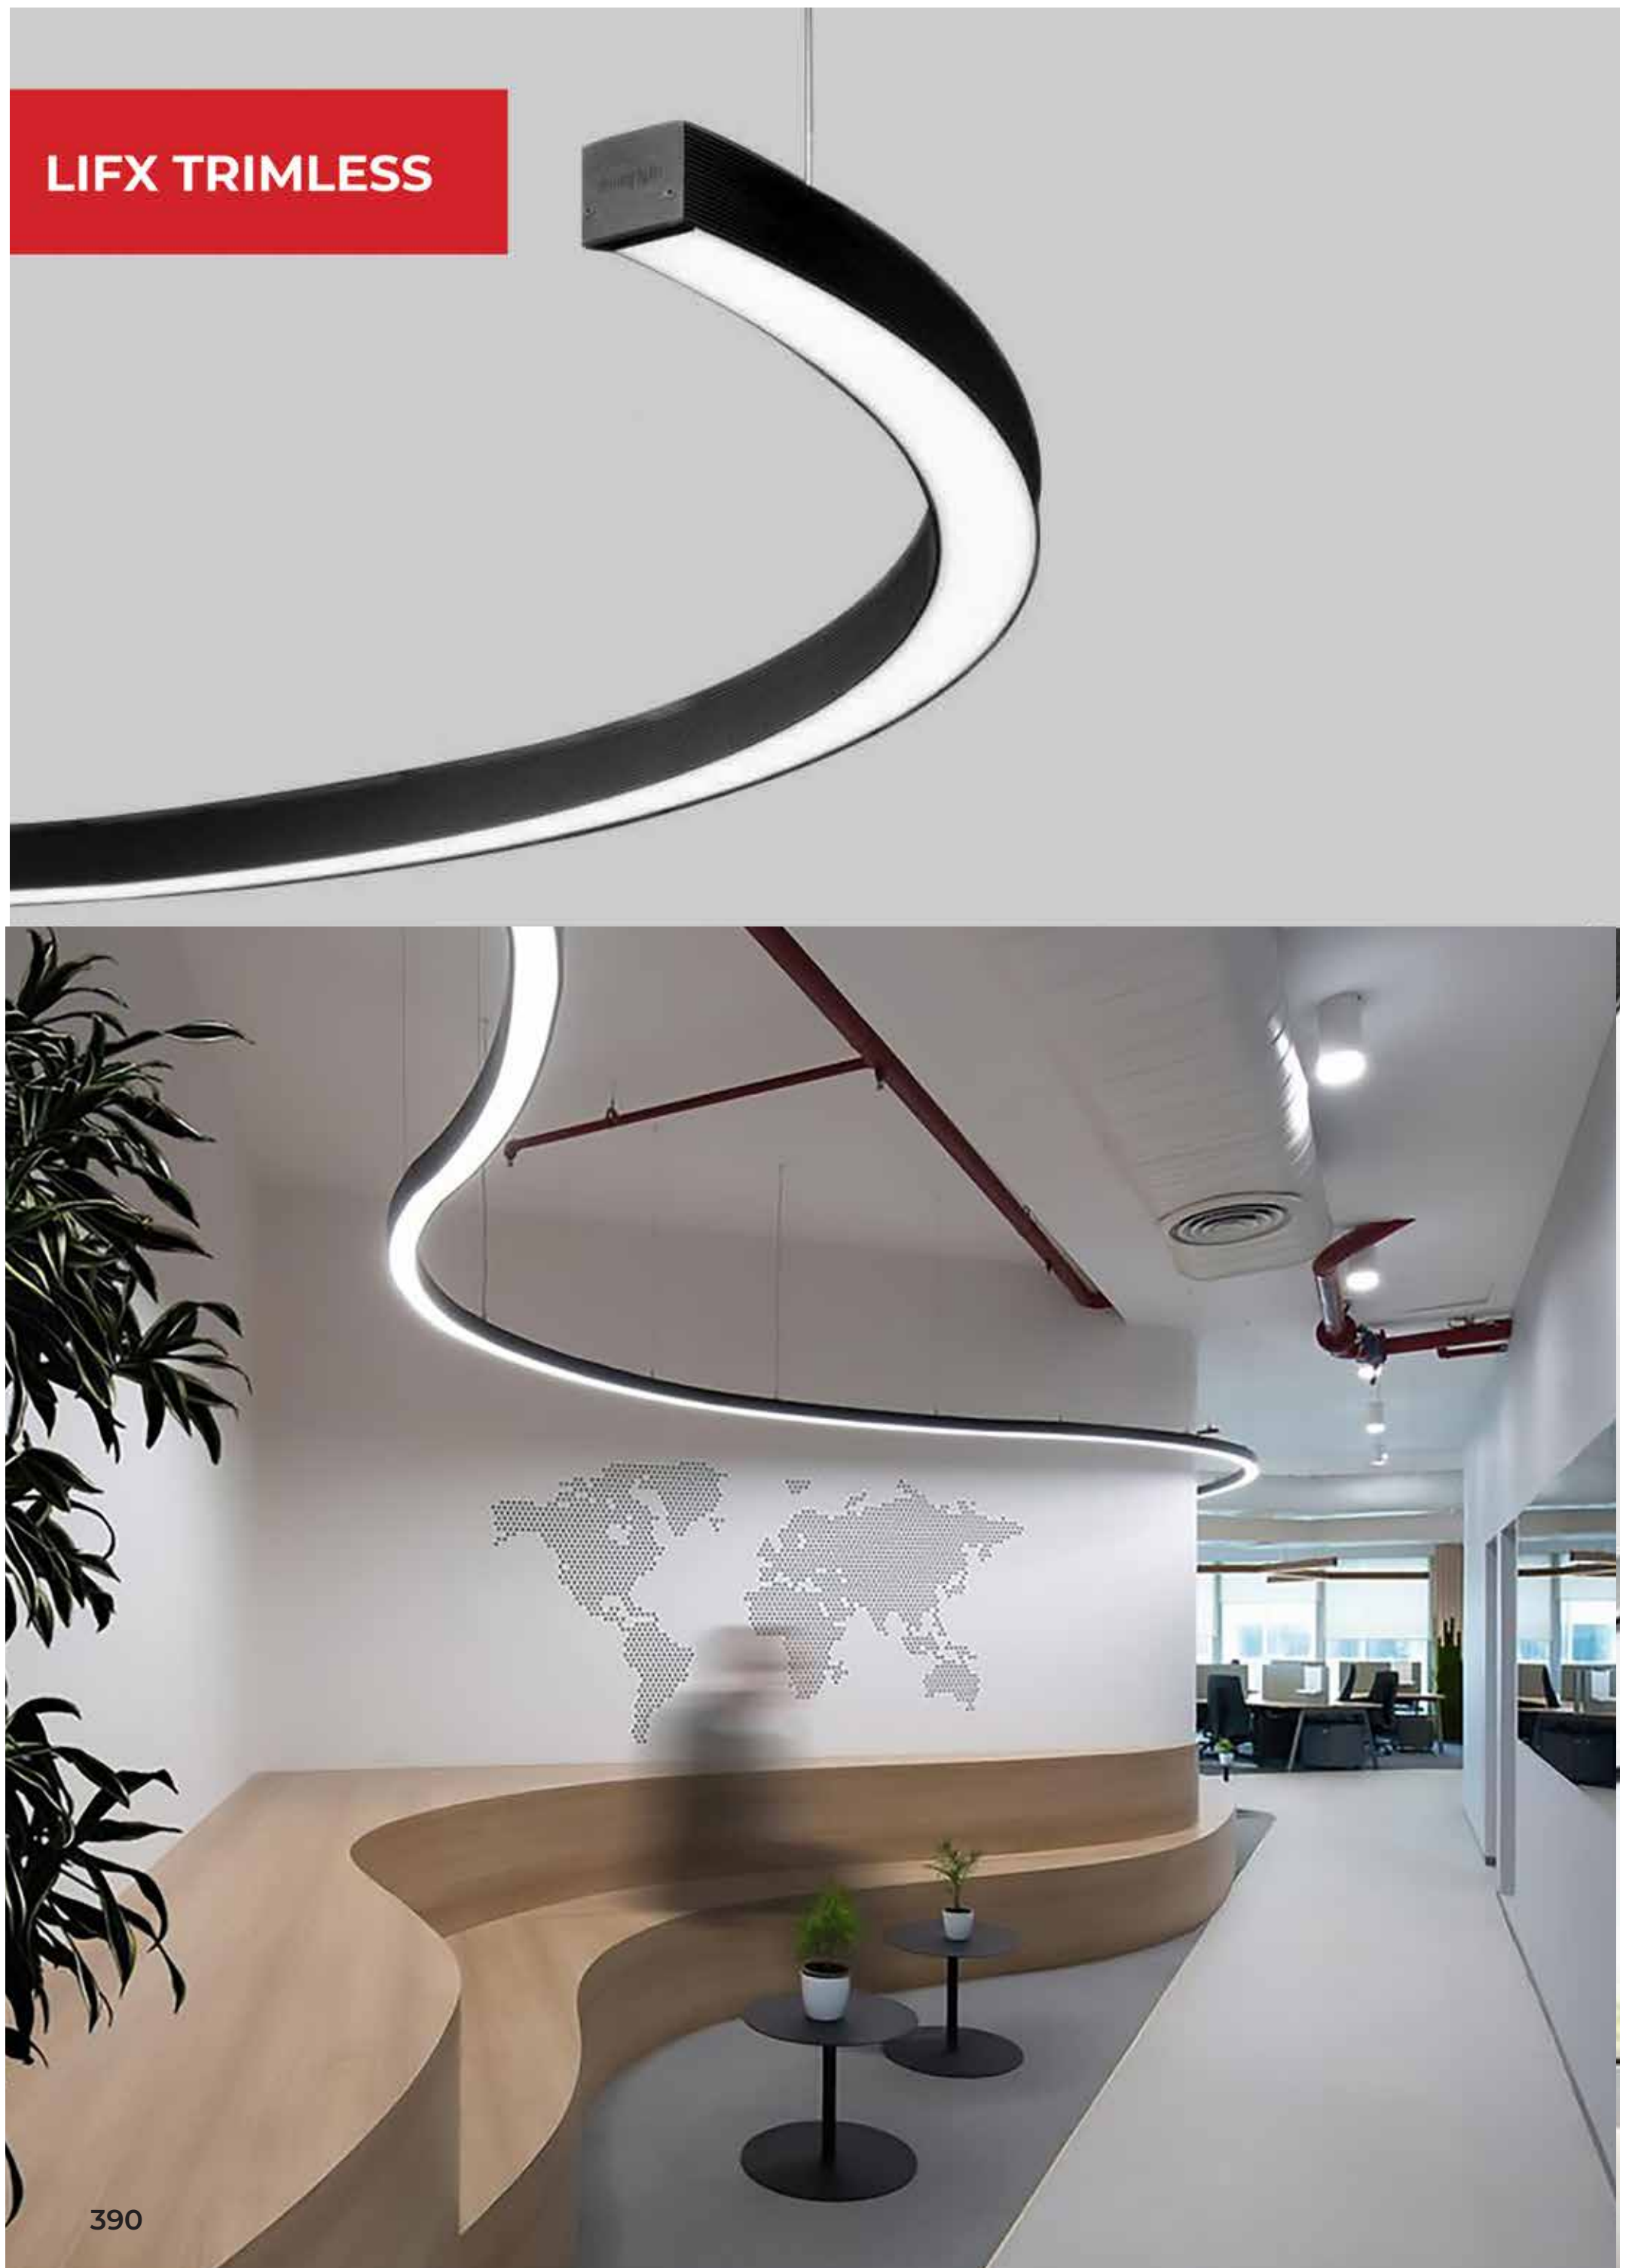

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Micro Prismatic Diffuser/ PMMA


L70 @50,000h

Aluminium

Types

Pendant/Recessed

Single Line Diagram

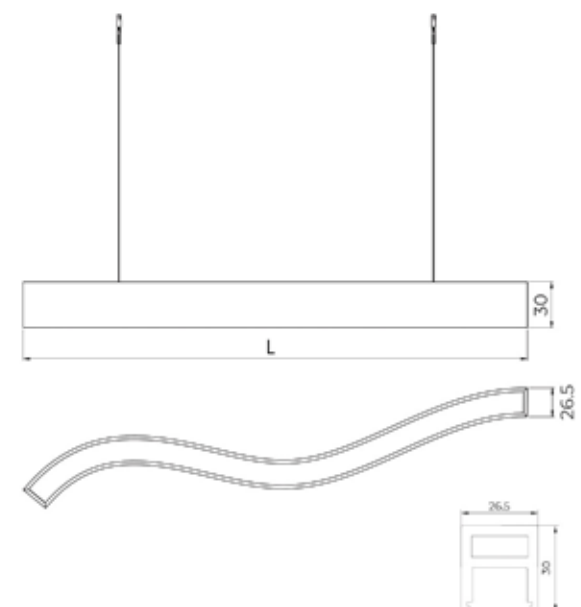

LIFX TRIMLESS


Lifx Trimless Curve linear fixture has :

- LED curved linear
- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency Micro Prismatic/ PMMA Diffuser
- Uniform illumination
- Dot-free lighting and smart arc linear
- Infinite architectural designs and circular patterns possible
- Energy efficient LED with high colour rendering
- LED PCB mounted
- For pendant or recessed mounted applications
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Light Distribution

Direct Direct-Indirect

Colours



CRI ≥ 90



TUNABLE
WHITE

LIFX TRIMLESS



CURVE SOFT 28

Product Order Code	System Power	Dimension
3025-  1	6W	L = 300mm,W = 28.5mm, H = 32mm
3025-  2	12W	L = 600mm,W = 28.5mm, H = 32mm
3025-  3	18W	L = 900mm,W = 28.5mm, H = 32mm
3025-  4	25W	L = 1200mm,W = 28.5mm, H = 32mm
3025-  5	50W	L = 2400mm,W = 28.5mm, H = 32mm

Order Options

Distribution

Direct

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4



CRI	
>90	1

Beam Angle

110°

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Mounting Type	
Pendant	1
Recessed	2

Material Colour	
Black	
White	
Grey	

Accessories

Product Order Code	Accessories Name	Accessories Image
3025-01 	LED PCB	
3025-02	Suspension Wire	
3025-03	PMMA Diffuser	
3025-04	Prismatic Diffuser	

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



☒

☐

☐

☐

1

2

3

4

CRI



☒