

In.Licht Ultra

LINA 6 ADJUSTABLE 4000K TM 30 REPORT


Lighting Facts

Color Quality:


CCT	3940.8
Ra	91.9
Rf	89.3
Rg	97.5
Duv	0.0017
SDCM	1.87

HCL index:


Illuminance	128.0
EML	92.72
M-EDI	84.07
S/P ratio	1.77
CAF	0.59
RG Risk	RG1
CS	0.16
SVM	0.0
Percent Flicker	0.0
Flicker Index	0.0
Frequency	0.0

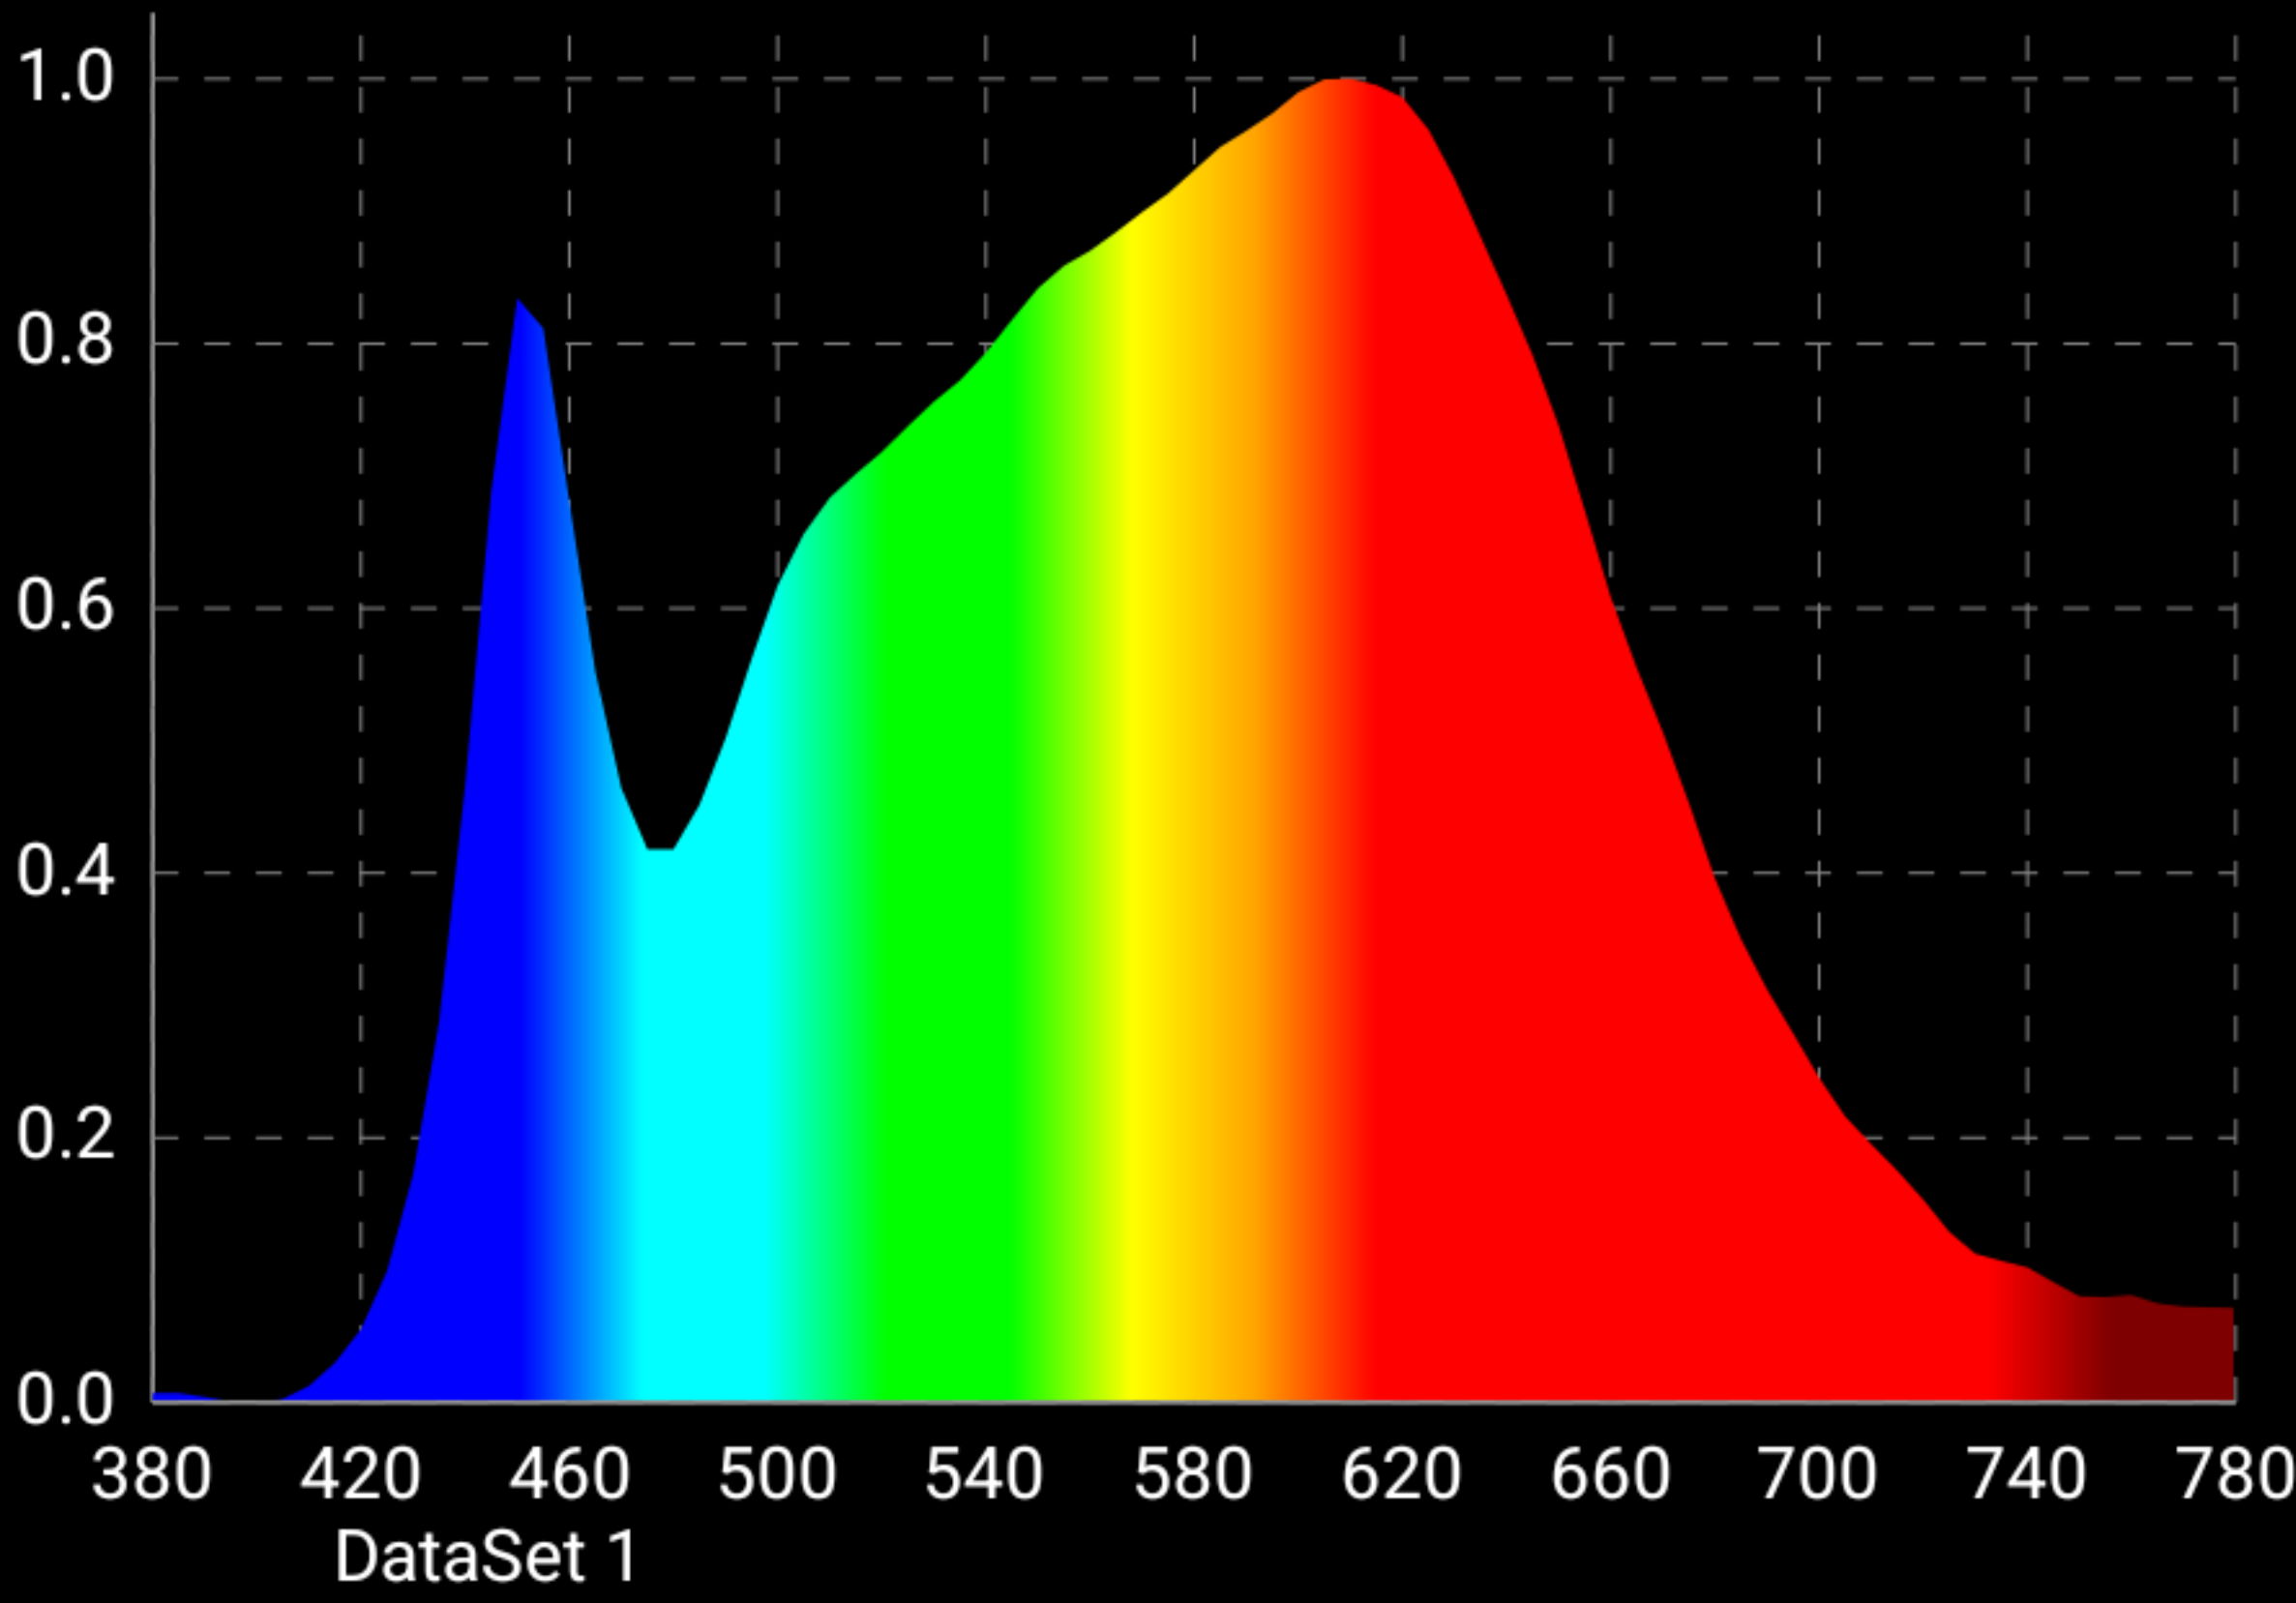

λ_d	574
λ_p	610
λ_{pV}	2.10

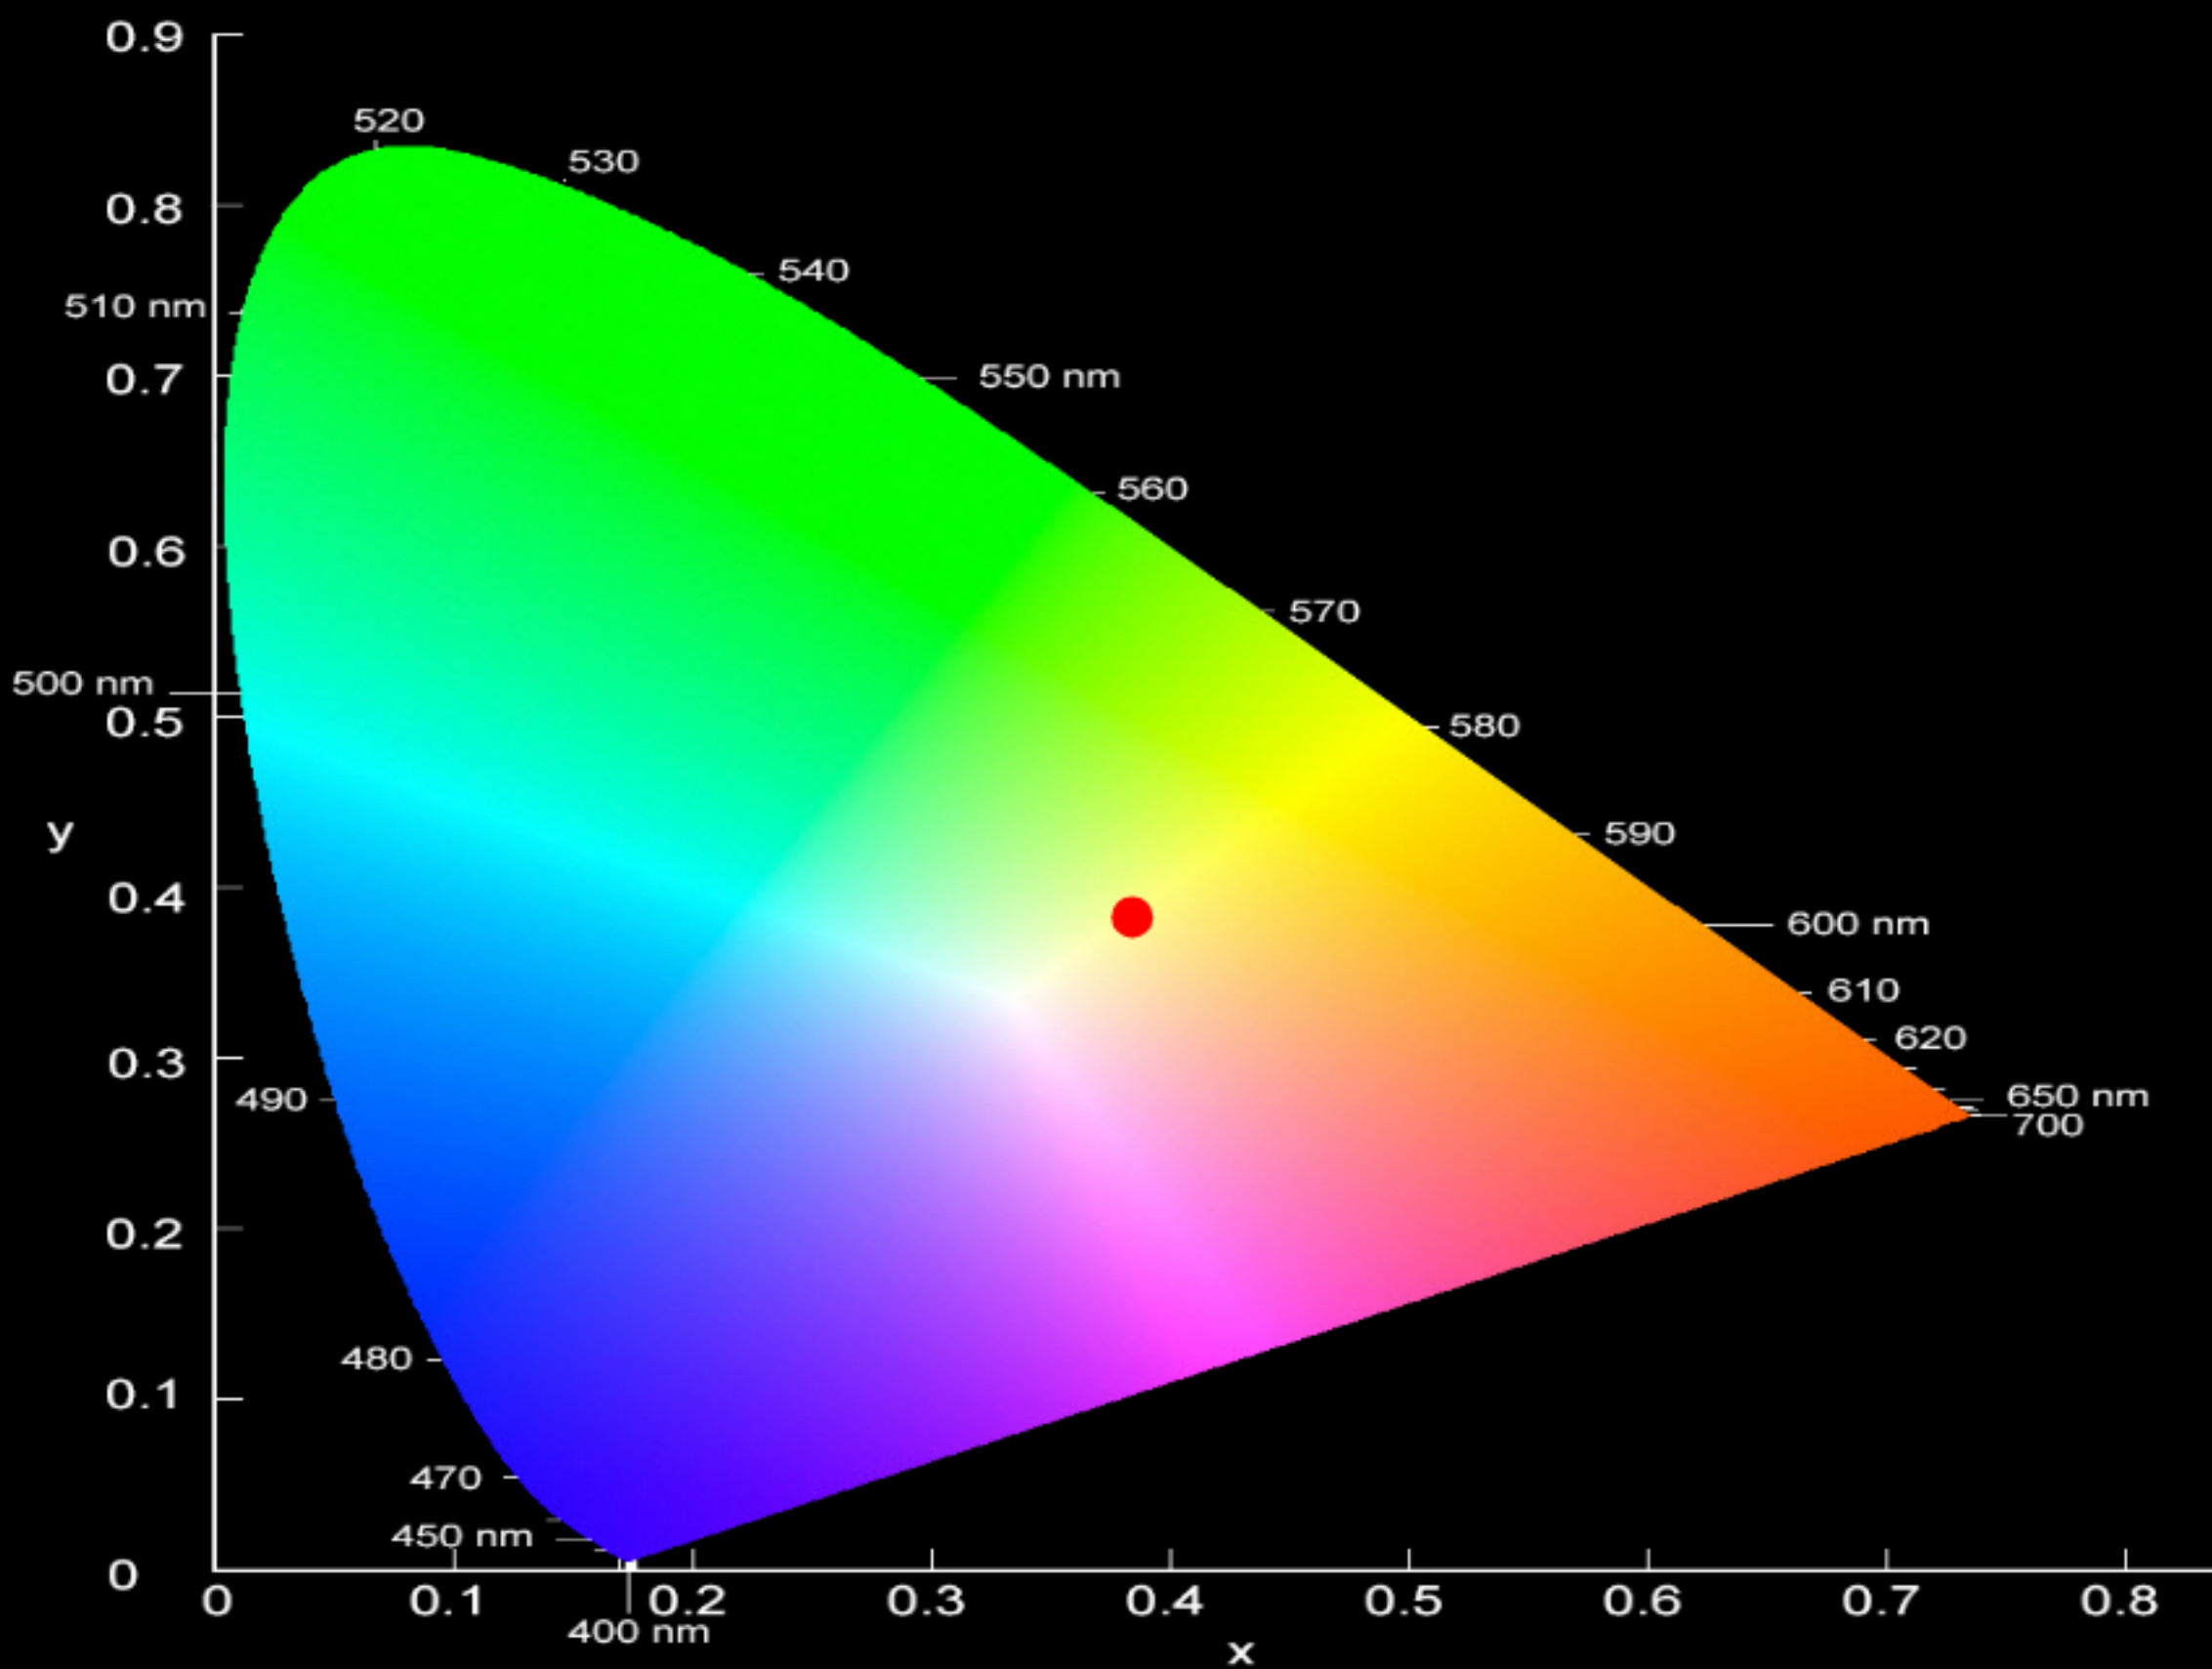


(x,y)	(0.384,0.383)
CCT	3940.8
Duv	0.0017

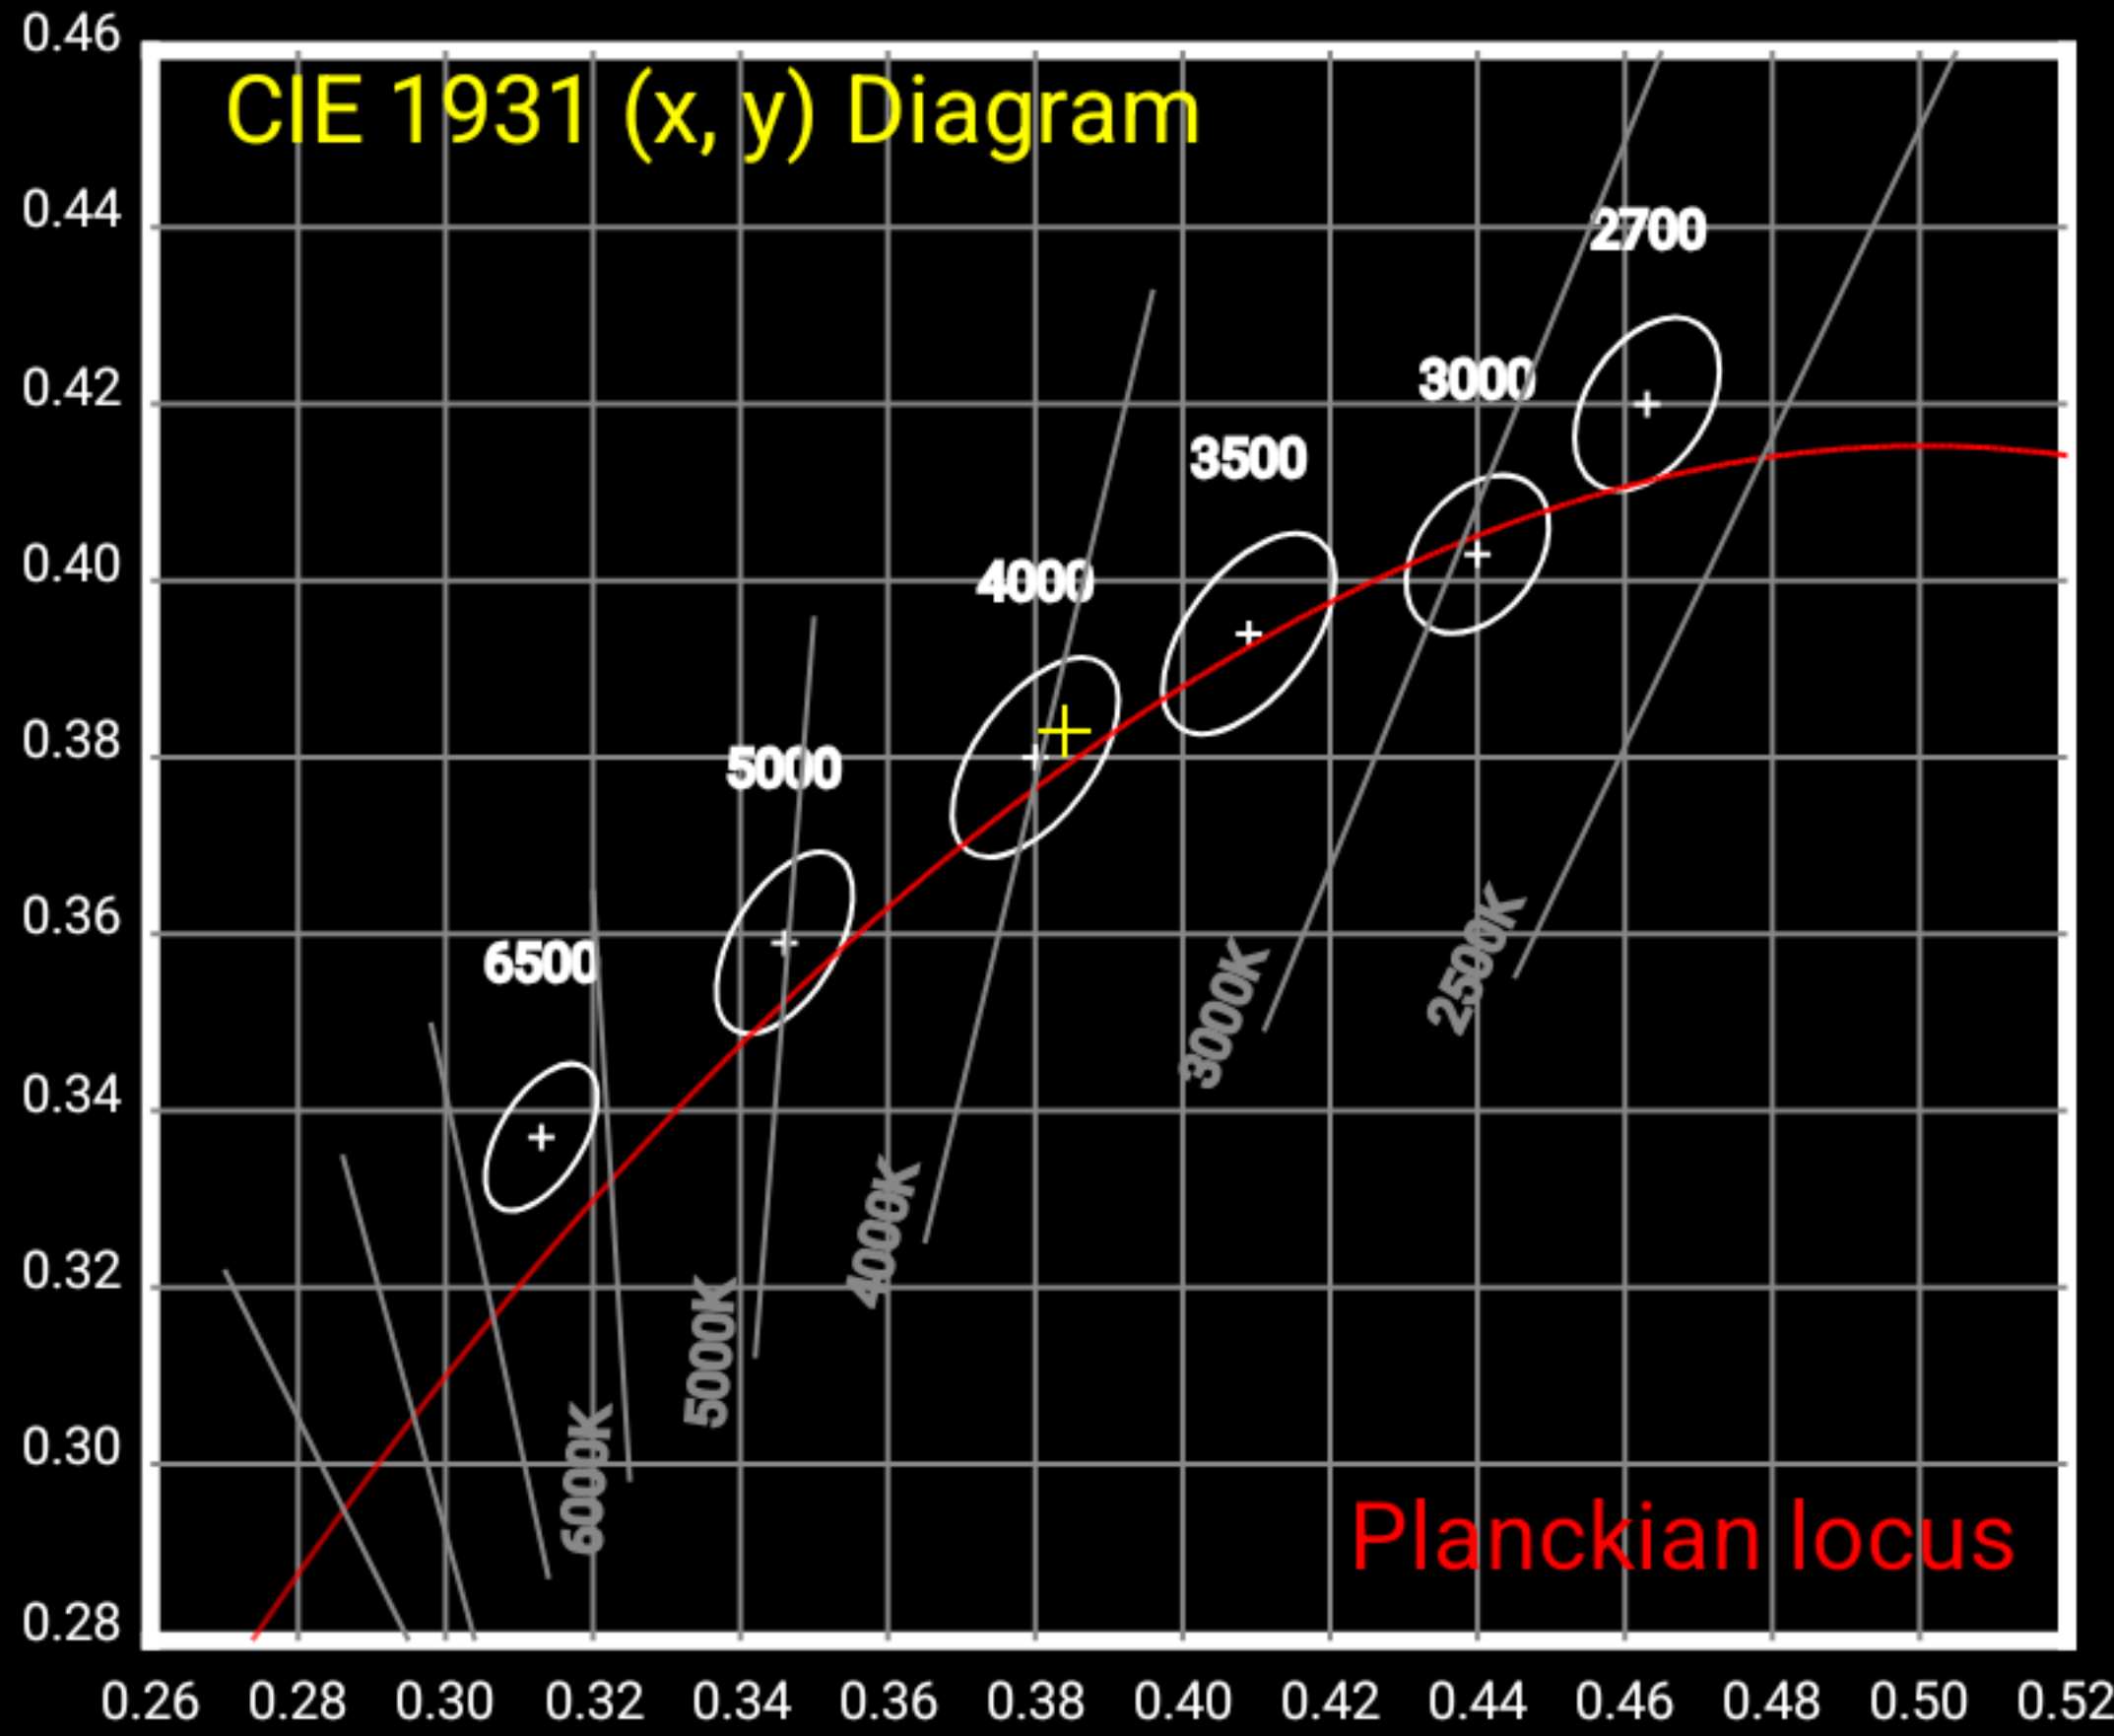


1.87
SDCM

x 0.384
y 0.383

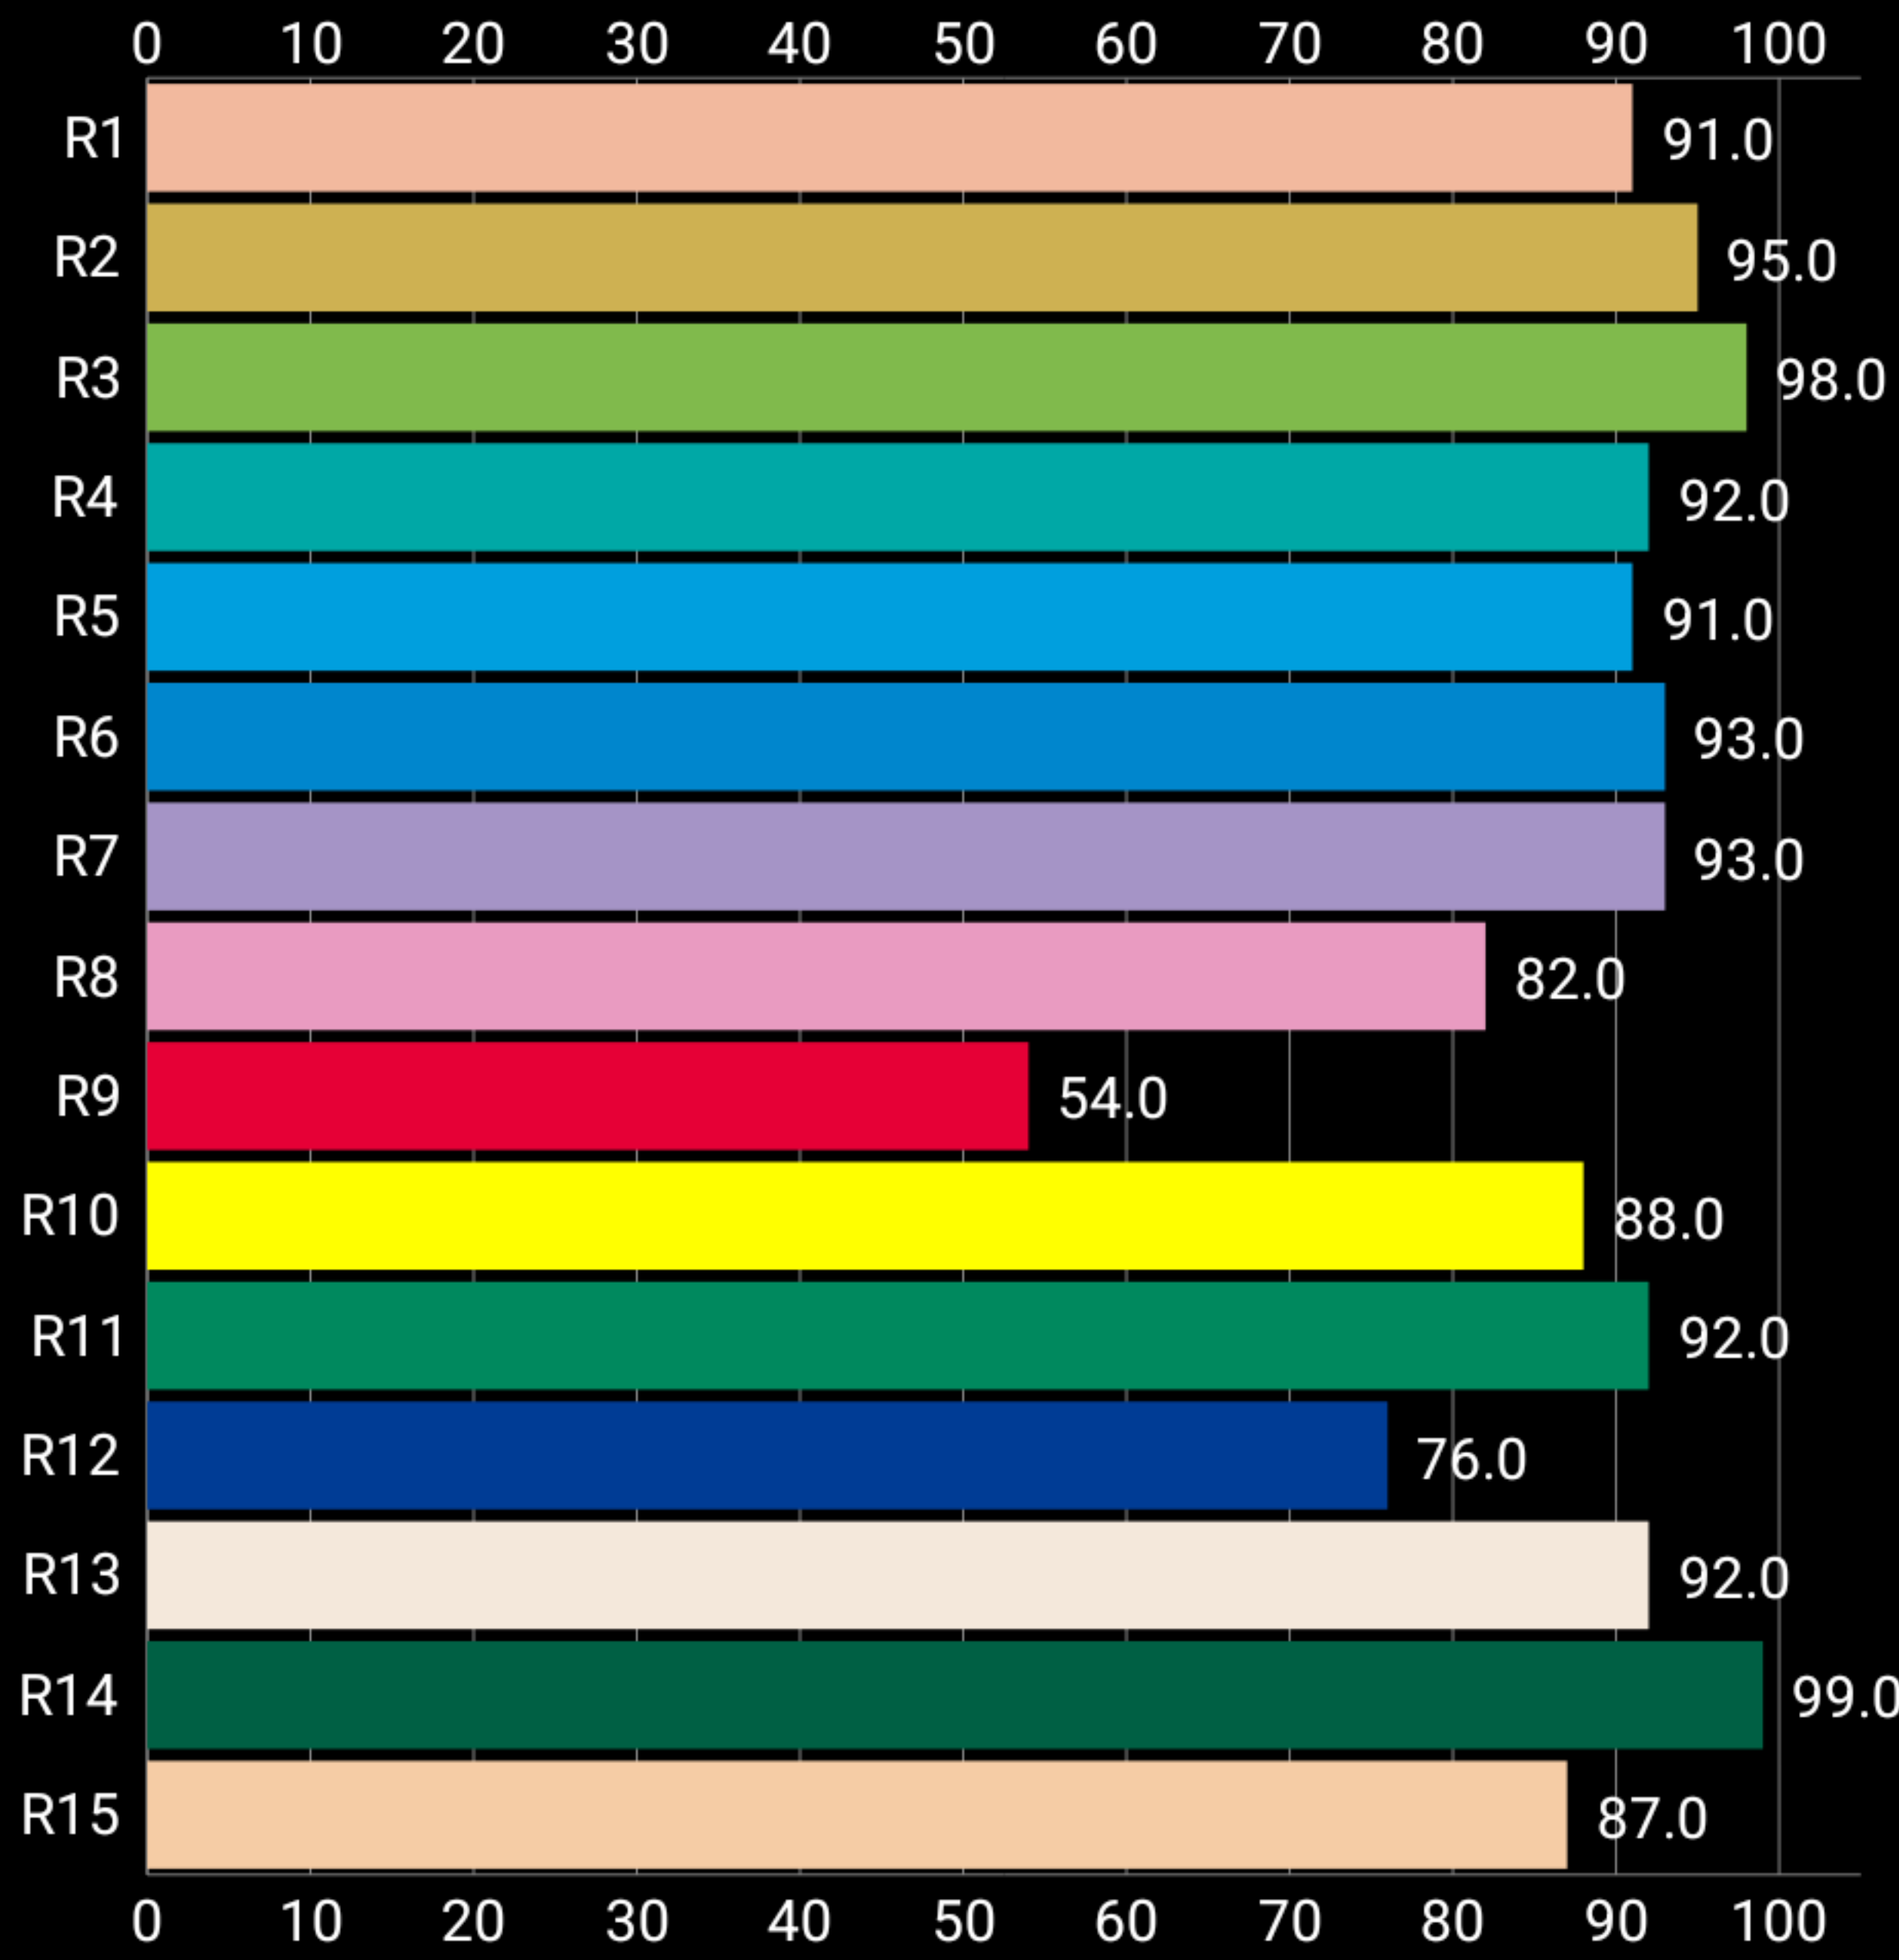


91.9
Ra

88.2
Re

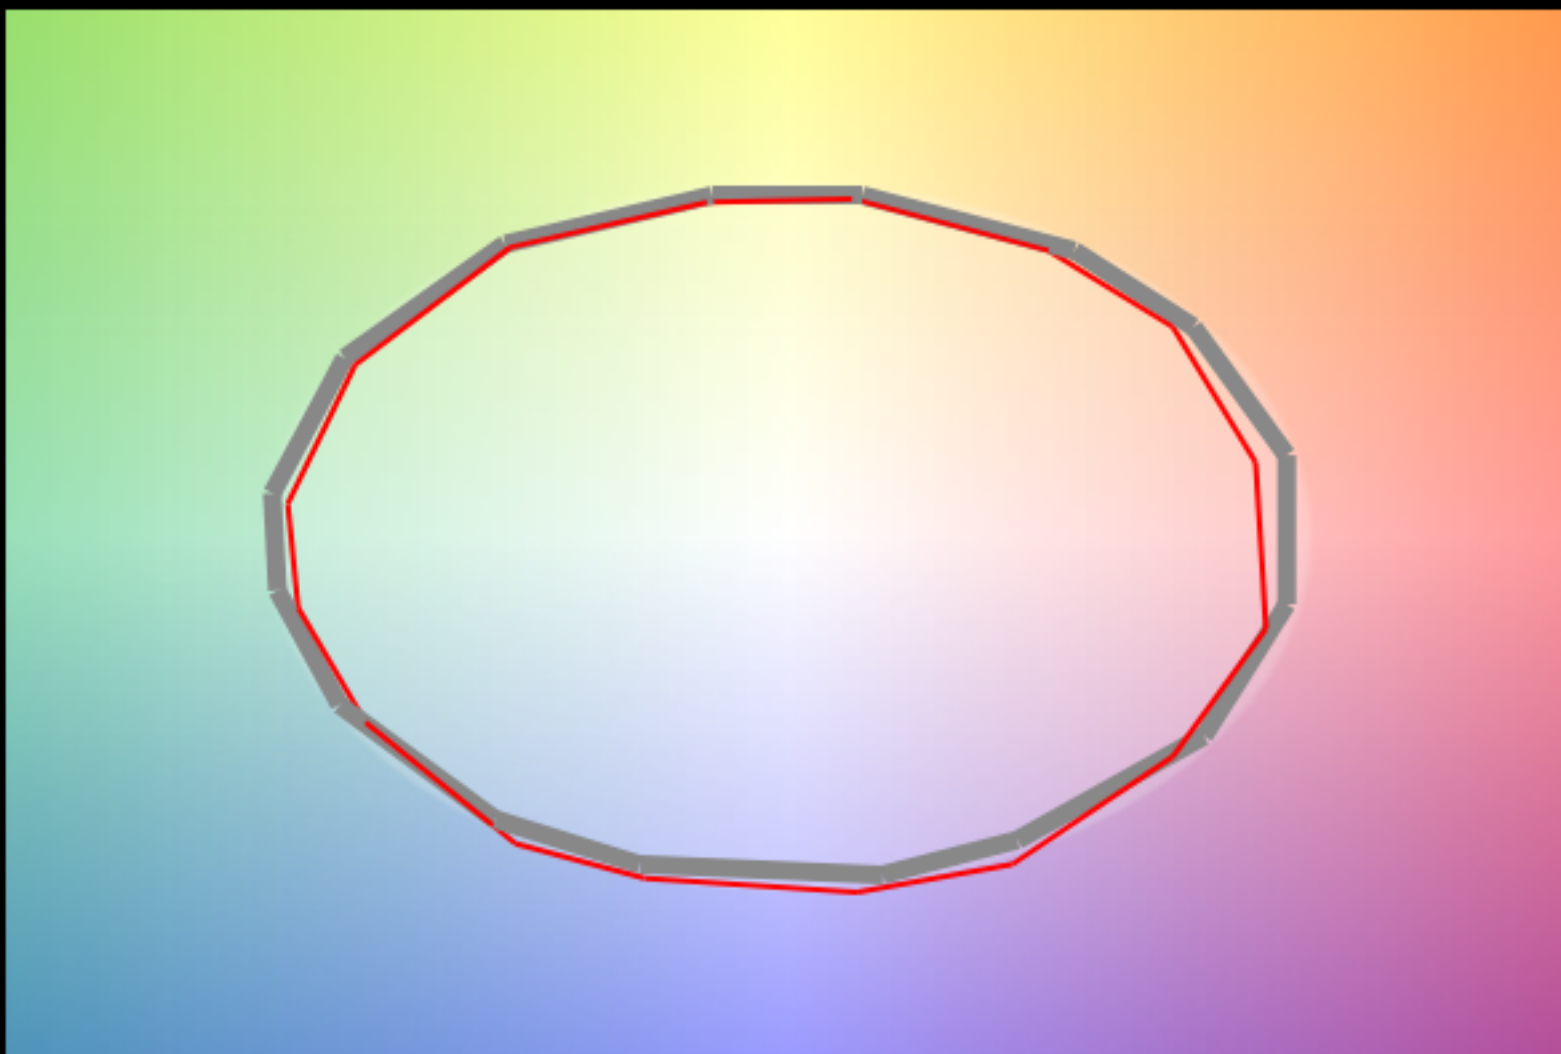

89.3
Rf

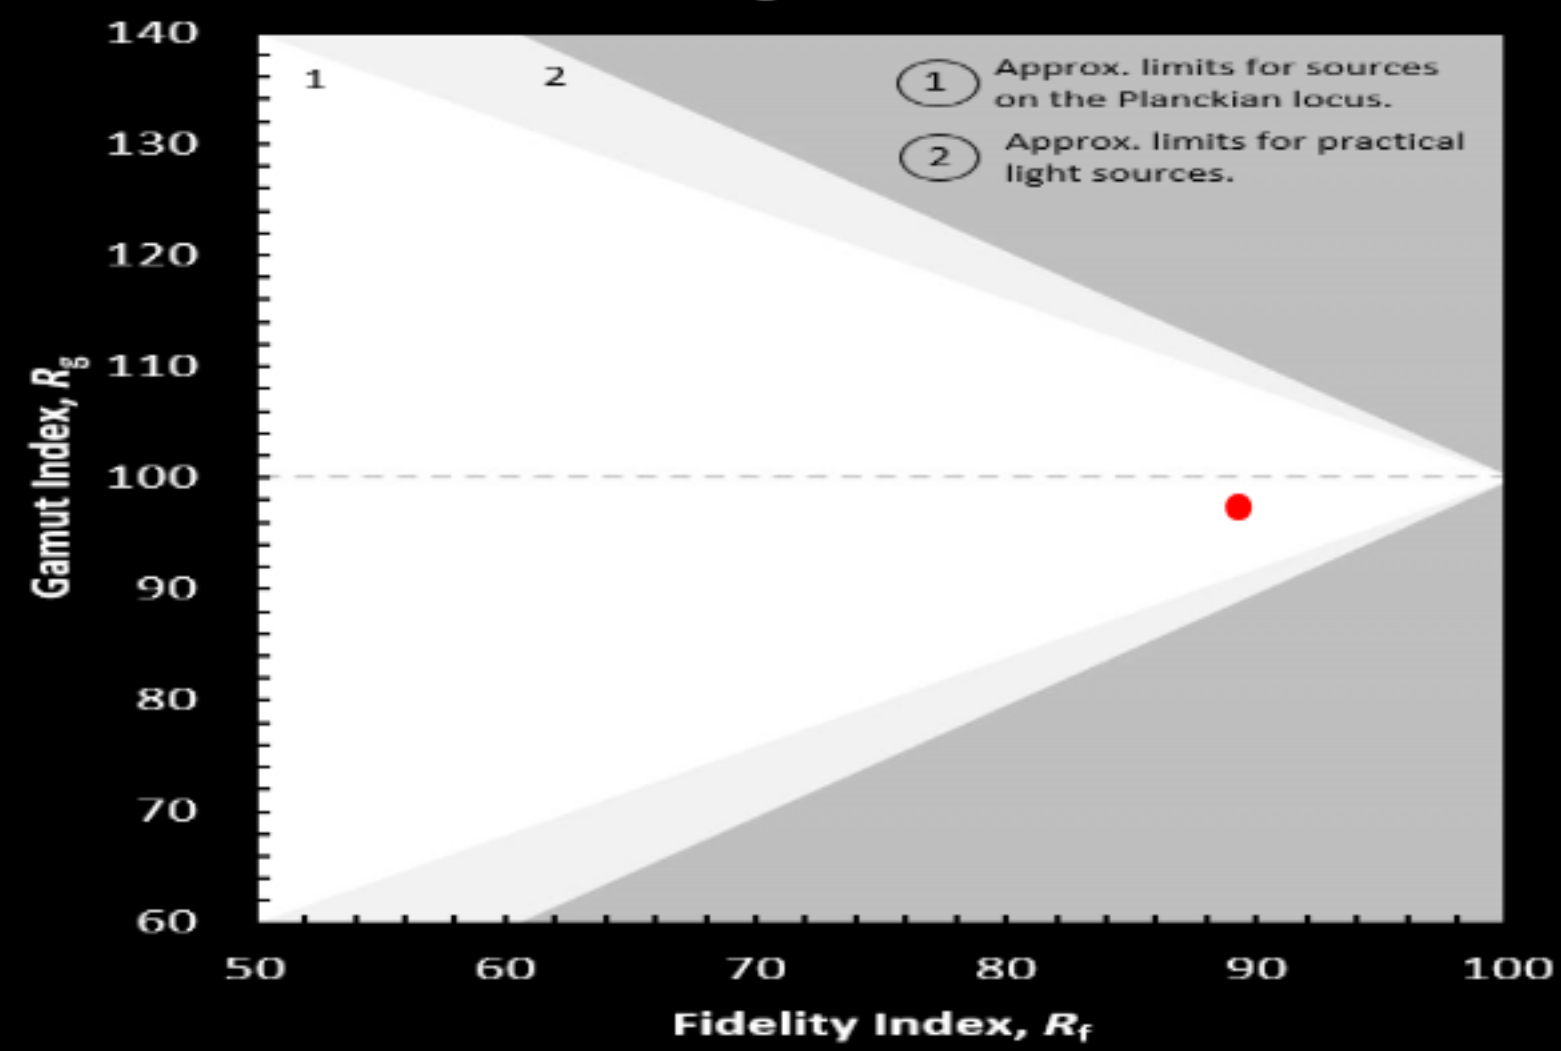

97.5
Rg

Time chart



Freq. chart



SVM	0.0
Percent flicker	0.0
Flicker index	0.0
Frequency	0.0