

LEXIS-R

Lexis-R Step light has :

- Luminaire housing of Die-Cast Aluminium
- IP65, High Ingress Protection against dust & moisture
- Extremely sustainable and requires little maintenance
- Lens optics for even light distribution
- Energy-efficient LED with high colour rendering
- Provides soft downward illumination to the desired walkway
- Versatile for use as a step, path, plinth or hallway lighting solution
- Edge lighting that adds sleek sophistication to contemporary and modern staircases

Quick Info

CRI $\geq 80/90$

2700K, 3000K, 4000K

Up to 80 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM ≤ 3

Clear Glass


L70 @50,000h

Aluminium Die-Cast

Types


Recessed

Single Line Diagram

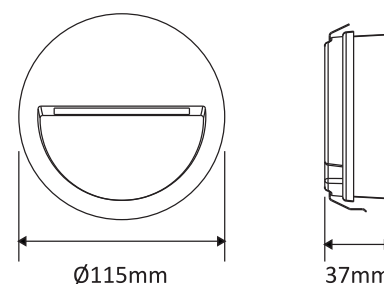

Light Distribution

Direct



CRI $\geq 80/90$

LEXIS-R



Product Order Code	System Power	Dimensions
1791	4W	Ø=115mm, H=37mm

Order Options

CCT (Colour Temperature)

- 2700K
- 3000K
- 4000K

CRI

- >80
- >90

Beam Angle

65°

Control

- Non-Dimmable
- Dali-Dimmable



Mounting Type

Recessed

Material Colour

- Black
- Grey