


LINA 6 ADJUSTABLE

Direct | Recessed

LINA 6 ADJUSTABLE

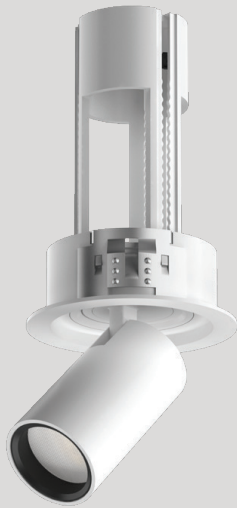

LINA 6 ADJUSTABLE is Adjustable COB Downlight made up of die cast aluminium housing and with premium powder coated finish.

Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and $\text{CRI} \geq 90$. The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency optics with beam angle options of 15°, 24° and 38° gives uniform and zero multiple shadow illumination.


LINA 6 ADJUSTABLE

Lina Adjustable Downlighter available in 2 variants Lina Adjustable 6 in 6W, single head circular version. This fixture is crafted for direct light distribution for accent lighting applications making it ideal for residential, commercial & professional applications.

Single Line Diagram

Recessed

LINA 6 ADJUSTABLE

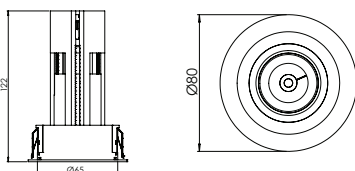

LINA 6 ADJUSTABLE



Quick Info

Mounting Type

Recessed

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

12°/24°/38°

Optics

Lens

Reflector

Efficacy

3000K- 62.3

4000K- 82.1

5700K- 90.0

Tunable White 2700K-6500K- 82.1

Electrical

Wattage - 6W

Input Voltage- 220-240 VAC

Physical

Outer Dia- 80mm

Cutout Dia- 65mm

Height- 122mm