

MAGNETO 20 LINEAR

Track Mounted



MAGNETO 20 LINEAR Luminaire with Extruded aluminium housing and with premium powder coating finish.

Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency PMMA Diffuser provides glare control and uniform illumination.


With a standard size of 605mm length, 45mm height and 23mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality.

Single Line Diagram

Track Mounted

MAGNETO 20 LINEAR

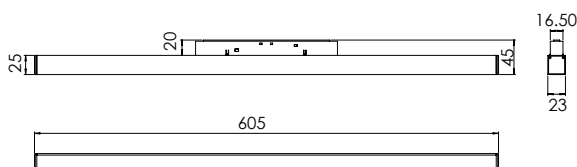

MAGNETO 20 LINEAR



Quick Info

Mounting Type

Track Mounted

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6700K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

110°

Optics

PMMA Diffuser

Efficacy

3000K- 97.4lm

4000K- 105.7

5700K- 126.6

Tunable White 2700K-6700K- 105.7

Electrical

Wattage - 20W

Input Voltage- 220-240 VAC

Physical

Length- 605mm

Height- 45mm

Width- 23mm