

MAGNETO LINEAR LENS 6

Track Mounted

MAGNETO LINEAR LENS 6



MAGNETO LINEAR LENS 6 Luminaire with Extruded aluminium housing and with premium powder coating finish.

Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency Lens & Reflector provides glare control and uniform illumination.


With a standard size of 118 mm length, 44mm height and 22mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality.

Single Line Diagram

Track Mounted

MAGNETO LENS SPOT 6

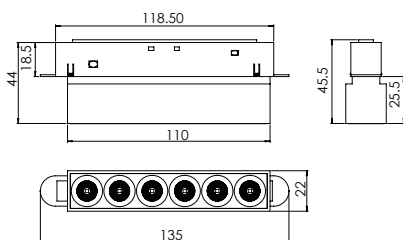

MAGNETO LINEAR LENS 6



Quick Info

Mounting Type

Track Mounted

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6700K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

12°/ 24°/ 38°

Optics

Lens & Reflector

Efficacy

3000K- 80.9lm

4000K- 91.6

5700K- 102.7

Tunable White 2700K-6700K- 91.6

Electrical

Wattage - 6W

Input Voltage- 220-240 VAC

Physical

Length- 118mm

Height- 44mm

Width- 22mm