

MAGNETO SPOT

divinity lights



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8 / DALI +

SDCM<3

Lens & Reflector

L70 @50,000h

Aluminium Die-cast


Types

Track Mounted


Single Line Diagram

Track Mounted

MAGNETO SPOT 6

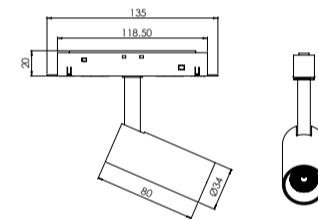

MAGNETO SPOT 12

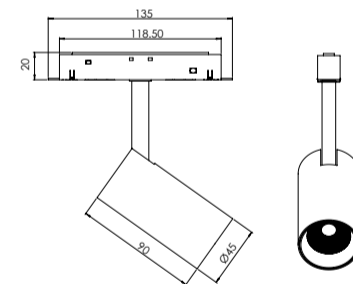


Colours



Light Distribution

Direct



CRI ≥ 90



TUNABLE WHITE



MAGNETO SPOT


Magneto Spot has:

- Die cast- aluminium Luminaire housing
- Premium powder coated finish
- COB (Chip on Board) technology
- LED with effective colour rendering
- High efficiency lens optics
- 90° inclination on the horizontal plane
- 355° rotation around the vertical axis
- Lighting components attached to the track by magnetic suction
- Convenient to install and dismantle
- Suitable for 48V Magnetic Surface, recessed Tracks
- Suitable for retail, hospitality & residential application


MAGNETO SPOT



MAGNETO SPOT 6

Product Order Code	System Power	Dimension
5009-  1	6W	Dia = 34mm, H = 80mm



MAGNETO SPOT 12

Product Order Code	System Power	Dimension
5009-  2	12W	Dia = 45mm, H = 90mm

Order Options







Distribution

Direct

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K 	4

CRI	
>90	1

Beam Angle	
12°	1
24°	2
38°	3

Control	
ON-OFF 	1
ON-OFF (FLICKER FREE) 	2
DALI-2 DT6 	3
DALI-2 DT8 	4
DALI + 	5








Material Colour

Black 




Mounting Type

Track Mounted

Accessories

Product Order Code	Accessories Name	Accessories Image
5009-01 	COB	
5009-02	Surface Track Profile	
5009-03	Recessed Track Profile	
5009-04	Short Line Connectors	
5009-05	End Feeds	
5009-06	End Cap	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1