
MATRIX-S
BOLLARD

divinity lights







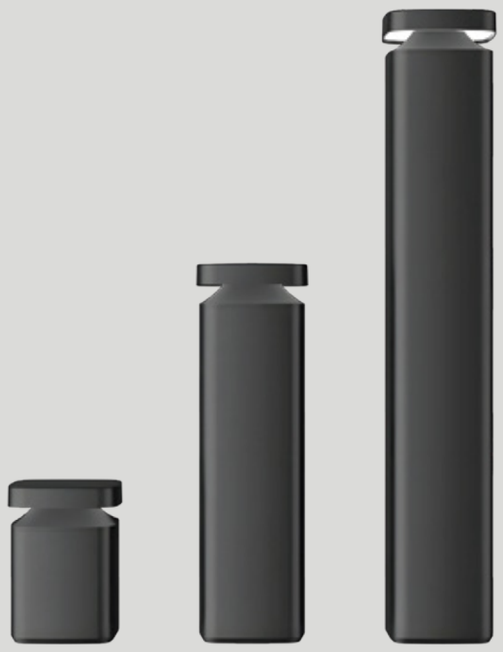





MATRIX-S BOLLARD

Matrix-S Bollard fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort
- LED bollard, designed to provide radially symmetric light emission of 360°
- Sustainable LED technology offers durability and optimal light output with low power consumption

divinity lights

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Glass


L70 @50,000h


Aluminium Die-Cast

Type

Surface

Single Line Diagram

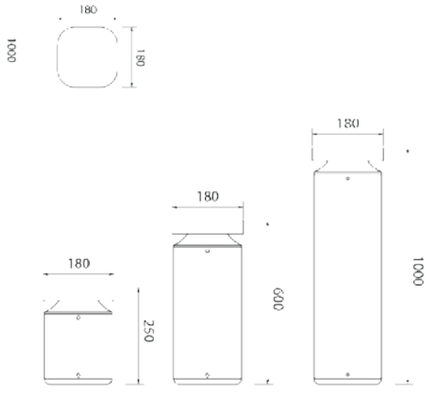




CRI ≥ 80

divinity lights

MATRIX-S BOLLARD



System Power	Dimensions
12W	LXW=180mmX180mm H=250mm
24W	LXW=180mmX180mm H=250mm
24W	LXW=180mmX180mm H=600mm
24W	LXW=180mmX180mm H=1000mm

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

CRI

>80

Beam Angle

360°

Control

Non-Dimmable

Dali- Dimmable

Mounting Type

Surface

Material Color

RAL as per request